



DNS

Deployment Guide

UPDATED: 27 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
1.3 Template	4
2 Architecture	5
3 Configure the LoadMaster	6
3.1 Enable Subnet Originating Requests Globally	6
3.2 Enable Check Persist Globally	7
3.3 Create the DNS Virtual Services	8
3.3.1 Create the DNS Virtual Services Using the Template	8
3.3.2 Configure the DNS TCP Virtual Service	9
3.3.2.1 DNS TCP Virtual Service Recommended API Settings (optional)	9
3.3.3 Configure the DNS UDP Virtual Service	10
3.3.3.1 DNS UDP Virtual Service Recommended API Settings (optional)	10
References	12
Last Updated Date	13

1 Introduction

Domain name system (DNS) servers match domain names like Kemptechnologies.com to their associated IP addresses, for example, 107.22.236.183. When you type kemptechnologies.com into your web browser's address bar, your computer contacts your current DNS server and asks what IP address is associated with kemptechnologies.com.

The Kemp LoadMaster is used to load balance the DNS workload. The LoadMaster offers advanced Layer 4 and Layer 7 server load balancing, SSL Acceleration and a multitude of other advanced Application Delivery Controller (ADC) features. The LoadMaster intelligently and efficiently distributes user traffic among the application servers so that users get the best experience possible.

1.1 Document Purpose

This document provides the recommended LoadMaster settings used when load balancing the DNS workload. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined. The Kemp support site can be found at: <https://support.kemptechnologies.com>

1.2 Intended Audience

This document is intended to be read by anyone who is interested in configuring the LoadMaster to optimize the DNS server.


1.3 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

2 Architecture

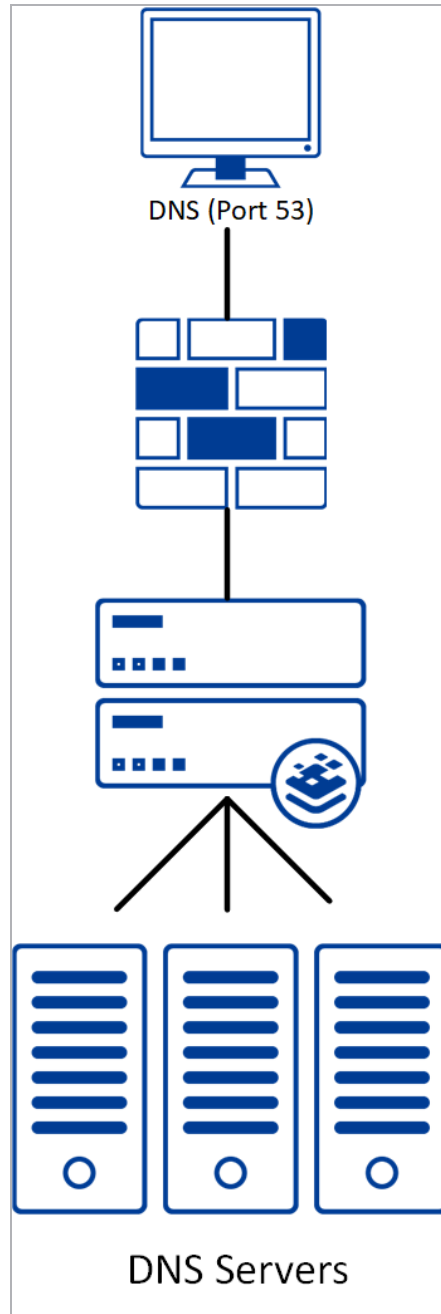

3 Configure the LoadMaster

The deployed DNS environment determines which of the following setups is used.

3.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

3 Configure the LoadMaster

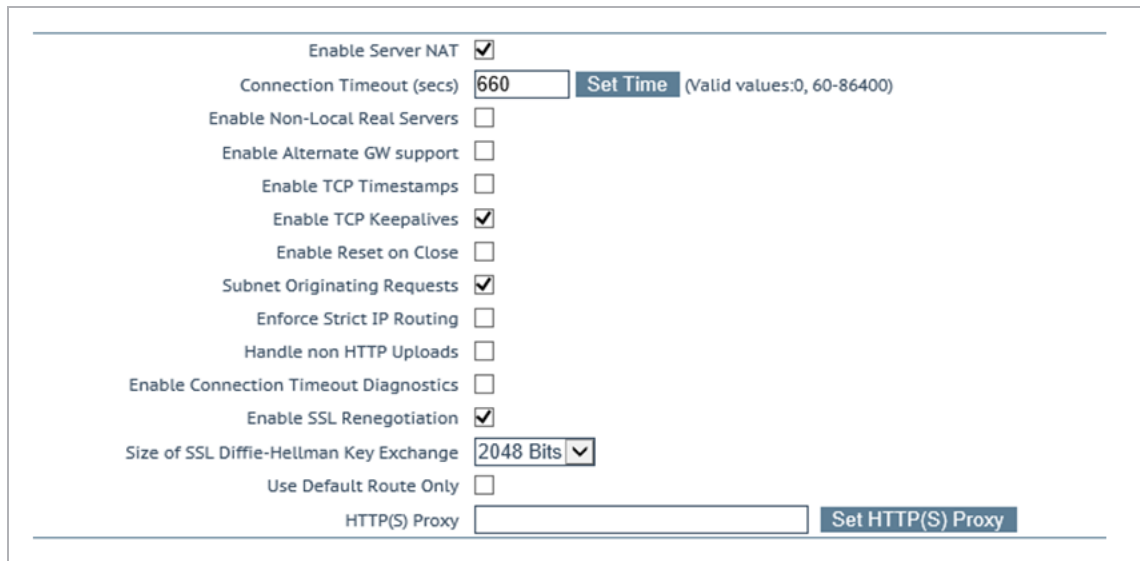

Enable Server NAT ☒

Connection Timeout (secs) [Set Time](#) (Valid values:0, 60-86400)

Enable Non-Local Real Servers ☐

Enable Alternate GW support ☐

Enable TCP Timestamps ☐

Enable TCP Keepalives ☒

Enable Reset on Close ☐

Subnet Originating Requests ☒

Enforce Strict IP Routing ☐

Handle non HTTP Uploads ☐

Enable Connection Timeout Diagnostics ☐

Enable SSL Renegotiation ☒

Size of SSL Diffie-Hellman Key Exchange

Use Default Route Only ☐


HTTP(S) Proxy [Set HTTP\(S\) Proxy](#)

2. Select the **Subnet Originating Requests** check box.

3.2 Enable Check Persist Globally

It is recommended that you change the **Always Check Persist** option to **Yes – Accept Changes**. Use the following steps:

1. Go to **System Configuration > Miscellaneous Options > L7 Configuration**.

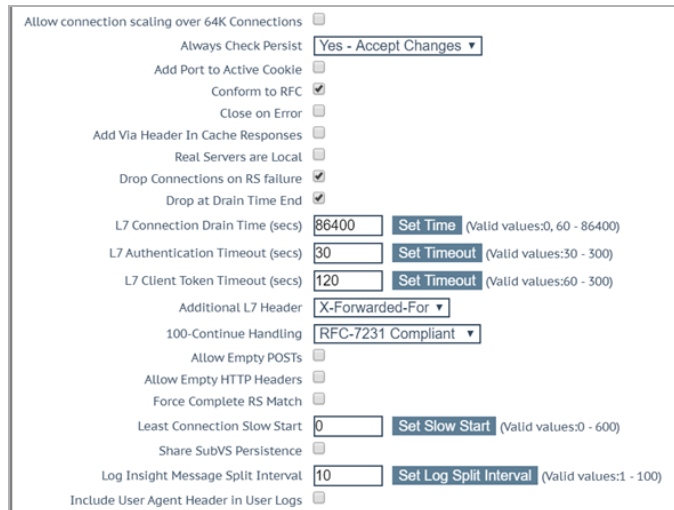

Allow connection scaling over 64K Connections ☐

Always Check Persist

Add Port to Active Cookie ☐

Conform to RFC ☒

Close on Error ☐

Add Via Header In Cache Responses ☐

Real Servers are Local ☐

Drop Connections on RS failure ☒

Drop at Drain Time End ☒

L7 Connection Drain Time (secs) [Set Time](#) (Valid values:0, 60 - 86400)

L7 Authentication Timeout (secs) [Set Timeout](#) (Valid values:30 - 300)

L7 Client Token Timeout (secs) [Set Timeout](#) (Valid values:60 - 300)

Additional L7 Header

100-Continue Handling

Allow Empty POSTs ☐

Allow Empty HTTP Headers ☐

Force Complete RS Match ☐

Least Connection Slow Start [Set Slow Start](#) (Valid values:0 - 600)

Share SubVS Persistence ☐

Log Insight Message Split Interval [Set Log Split Interval](#) (Valid values:1 - 100)

Include User Agent Header in User Logs ☐

2. Click the **Always Check Persist** drop-down arrow and select **Yes – Accept Changes**.


3.3 Create the DNS Virtual Services

The following sections describe the recommended settings for the DNS Virtual Services.

3.3.1 Create the DNS Virtual Services Using the Template

The following are the steps involved and the recommended settings to configure the DNS Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

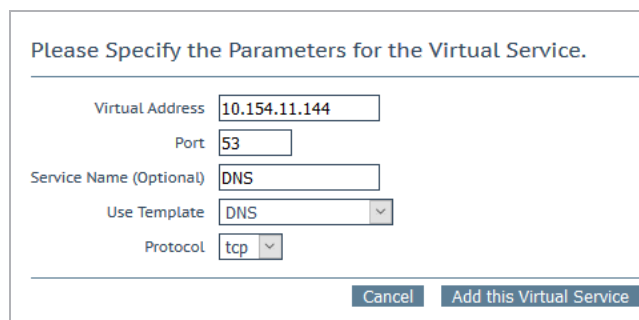

Please Specify the Parameters for the Virtual Service.

Virtual Address	10.154.11.144
Port	53
Service Name (Optional)	DNS
Use Template	DNS
Protocol	tcp

Cancel Add this Virtual Service

2. Type a valid **Virtual Address**.
3. Select the **DNS** template from the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.

If adding a DNS Virtual Service on a network not associated with the interface containing the LoadMaster's global default gateway, a Virtual Service Default Gateway is required. It is not possible to set a default gateway on a UDP Virtual Service. To set the default gateway for a UDP Virtual Service, use this workaround:

1. Create a TCP Virtual Service with the same IP address (the port is irrelevant). Do not add any Real Servers.
2. Set the **Default Gateway** for that Virtual Service. It will also affect the UDP Virtual Service (that is, the required one).

Default gateways only work on IP addresses, so having two Virtual Services with the same IP address and different default gateways does not work.

3.3.2 Configure the DNS TCP Virtual Service

The following are the steps involved and recommended settings to configure the DNS TCP Virtual Service:

1. Select **View/Modify Services** under **Virtual Services** in the main menu on the left.

Add New							
Virtual IP Address	Prot	Name	Layer	Certificate Installed	Status	Real Servers	Operation
10.10.99.12:53	tcp	DNS TCP	L7		⊗ Down		Modify Delete
10.10.99.12:53	udp	DNS UDP	L7		⊗ Down		Modify Delete

2. Click **Modify** on the **DNS TCP** Virtual Service.
3. Add the Real Servers:
 - a) Expand the **Real Servers** section.
 - b) Click **Add New**.
 - c) Enter the address of the relevant Real Server.
 - d) Confirm that port **53** is entered.
 - e) Click **Add this Real Server**, then click **OK** to the pop-up message.
 - f) Repeat the steps above to add more Real Servers as needed, based on your environment.

3.3.2.1 DNS TCP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameters	API Value
port	53
prot	tcp
VStype	gen
SubnetOriginating	1
Idletimeout	180
Schedule	lc

3 Configure the LoadMaster

API Parameters	API Value
CheckType	tcp

3.3.3 Configure the DNS UDP Virtual Service

The following are the steps involved and the recommended settings to configure the DNS UDP Virtual Service:

1. Select **View/Modify Services** under **Virtual Services** in the main menu on the left.

Add New							
Virtual IP Address	Prot	Name	Layer	Certificate Installed	Status	Real Servers	Operation
10.10.99.12:53	tcp	DNS TCP	L7		⊗ Down		Modify Delete
10.10.99.12:53	udp	DNS UDP	L7		⊗ Down		Modify Delete

2. Click **Modify** on the **DNS UDP** Virtual Service.
3. Add the Real Servers:
 - a) Expand the **Real Servers** section.
 - b) Click **Add New**.
 - c) Enter the address of the relevant Real Server.
 - d) Confirm that port **53** is entered.
 - e) Click **Add this Real Server**, then click **OK** to the pop-up message.
 - f) Confirm that port **53** is entered.
 - g) Click **Add this Real Server**, then click **OK** to the pop-up message.
 - h) Repeat the steps above to add more Real Servers as needed, based on your environment.

3.3.3.1 DNS UDP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameters	API Value
port	53

3 Configure the LoadMaster

API Parameters	API Value
prot	udp
VStype	gen
SubnetOriginating	1
Schedule	lc
CheckType	dns

References

Unless otherwise specified, the following documents can be found at <http://kemptechnologies.com/documentation>.

Virtual Services and Templates, Feature Description

Last Updated Date

This document was last updated on 27 July 2023.