



Remote Desktop Services

Deployment Guide

UPDATED: 27 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

| | |
|---|----------|
| 1 Introduction | 5 |
| 1.1 Document Purpose | 5 |
| 1.2 Intended Audience | 5 |
| 2 RDS Load Balancing Scenarios | 6 |
| 2.1 Scenarios Explained | 6 |
| 2.1.1 Load Balancing Remote Desktop Web Access | 6 |
| 2.1.2 Load Balancing Remote Desktop Gateway | 7 |
| 2.1.3 Load Balancing Remote Desktop Connection Broker | 9 |
| 2.1.4 Load Balancing Remote Desktop Session Host | 11 |
| 2.2 Deploying the Scenarios | 13 |
| 2.2.1 Prerequisites | 13 |
| 2.2.1.1 Install an SSL Certificate on the LoadMaster | 13 |
| 2.2.1.2 Disable Options on the Real Servers | 14 |
| 2.2.2 Implementing Remote Desktop Web Access Load Balancing | 15 |
| 2.2.2.1 Prerequisites | 15 |
| 2.2.2.2 Implementation | 18 |
| 2.2.2.3 Testing | 19 |
| 2.2.3 Implementing Remote Desktop Gateway Load Balancing | 21 |
| 2.2.3.1 Prerequisites | 21 |
| 2.2.3.2 Implementation | 24 |
| 2.2.3.3 Testing | 32 |

| | |
|--|-----------|
| 2.2.4 Implementing Remote Desktop Connection Broker Load Balancing | 34 |
| 2.2.4.1 Prerequisites | 34 |
| 2.2.4.2 Implementation | 38 |
| 2.2.4.3 Testing | 40 |
| 2.2.5 Implementing Remote Desktop Session Host Load Balancing | 41 |
| 2.2.5.1 Prerequisites | 41 |
| 2.2.5.2 Implementation | 44 |
| 2.2.5.3 Testing | 45 |
| 3 Troubleshooting | 47 |
| 3.1 Connections Rejected | 47 |
| 3.2 Load Not Balanced | 47 |
| References | 49 |
| Last Updated Date | 50 |

1 Introduction

Remote Desktop Services (RDS), known as Terminal Services in Windows Server 2008 and earlier, is one of the components of Microsoft Windows that allows a user to take control of a remote computer or virtual machine over a network connection. RDS is Microsoft's implementation of thin client, where Windows software and the entire desktop of the computer running RDS are made accessible to a remote client machine that supports Remote Desktop Protocol (RDP).

With Windows Server 2012 and Windows 8, Microsoft introduced RDP 8.0. The protocol evolved in RDP 8.1 with Windows Server 2012 R2 and Windows 8.1. Compared to previous releases, there have been several changes to both the administrative experience and user experience.

1.1 Document Purpose


This deployment guide provides instructions on how to configure the Kemp LoadMaster to load balance the various Microsoft RDS roles in Windows Server 2012 R2.

The **Scenarios Explained** section discusses the various scenarios in which the LoadMaster can be used. The **Deploying the Scenarios** section explains the process of setting up load balancing for those scenarios. The **References** section contains a summary of useful resources regarding RDS (and load balancing RDS) in general.

1.2 Intended Audience

Anyone interested in configuring the LoadMaster to load balance RDS.

2 RDS Load Balancing Scenarios

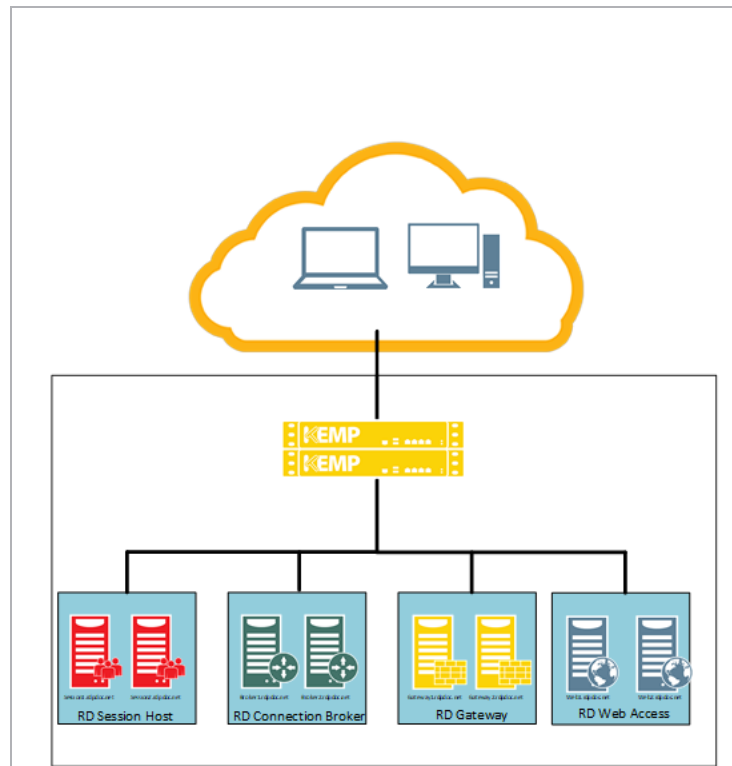

The figure above shows the various scenarios where the Kemp LoadMaster can be used to load balance RDS services.

2.1 Scenarios Explained

RDS running on Windows Server 2012 (R2) consists of various different RDS roles. The Kemp LoadMaster can be configured to load balance those roles. The sections below discuss the various scenarios in which the Kemp LoadMaster can be used to load balance RDS to.

2.1.1 Load Balancing Remote Desktop Web Access


Microsoft Remote Desktop Web Access (RD Web Access) is used to publish Full Desktops as well as Remote Apps and make them available from a website and a web feed.

2 RDS Load Balancing Scenarios

RD Web Access is a website running on Internet Information Server (IIS). RD Web Access preferably runs on port 443 to leverage SSL security and is, by default, accessed by browsing to **https://<FullyQualifiedDomainName(FQDN)>/rdweb**.



After your RD Web Access server has been installed, you can use the Remote Desktop Management Services (RDMS) console as part of the Server Manager to retrieve the URLs of the RD Web Access servers that are part of the deployment. These servers must be added to the LoadMaster to start load balancing Web Access.

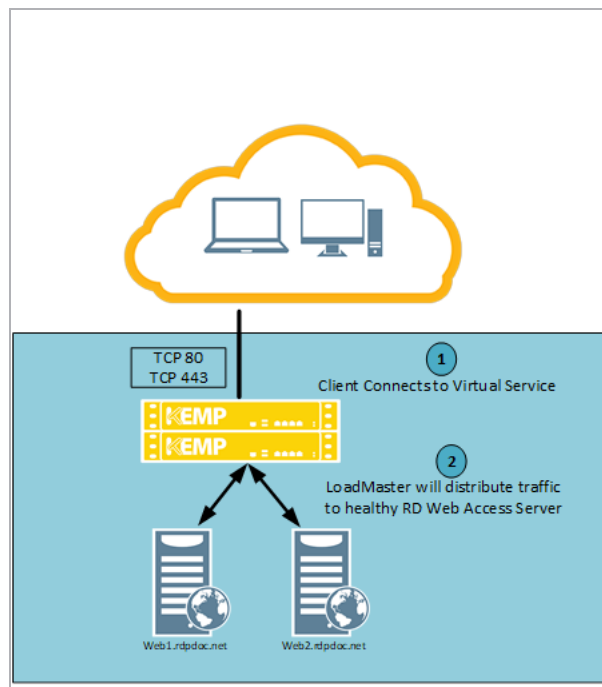


2.1.2 Load Balancing Remote Desktop Gateway


Microsoft Remote Desktop Gateway (RD Gateway) is used to safely publish a Remote App of Full Desktop over the internet. The RD Gateway functions as an RDP proxy. It proxies incoming RDP traffic (on port 443) to the Remote Desktop Session Host (RD Session Host) servers on port 3389.

2 RDS Load Balancing Scenarios

The RDP traffic running on port 443 must be load balanced in the Kemp LoadMaster.

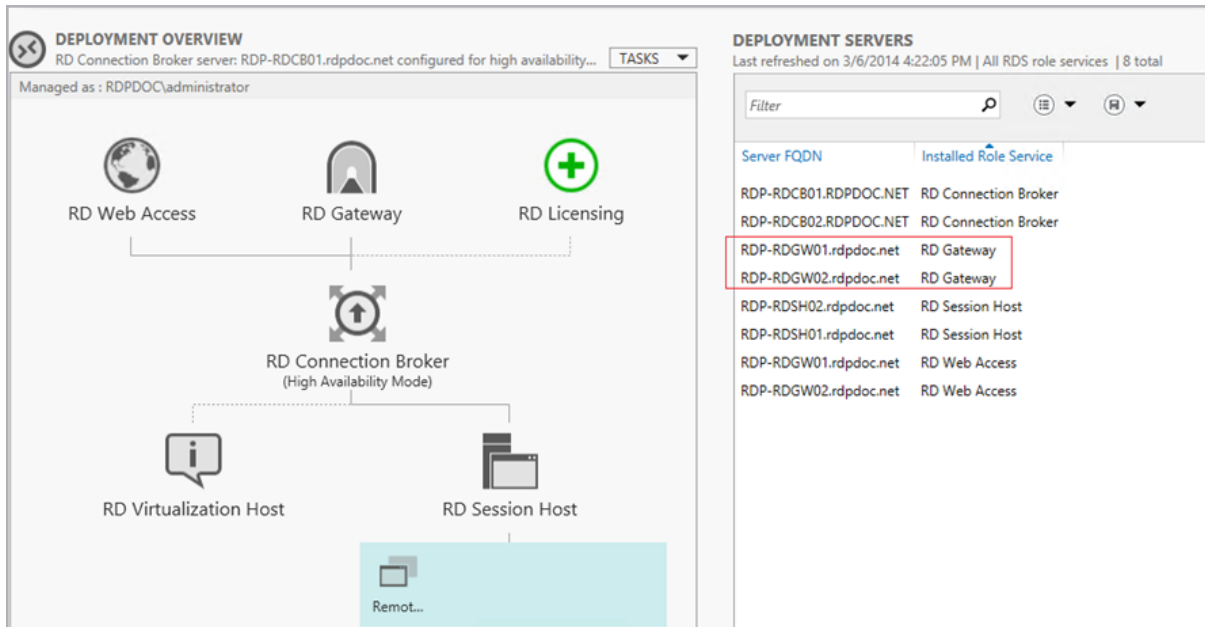

After the RD Gateway role is installed, you can use the Remote Desktop Management Services (RDMS) console as part of the Server Manager to retrieve the RD Gateway servers as part of the deployment.

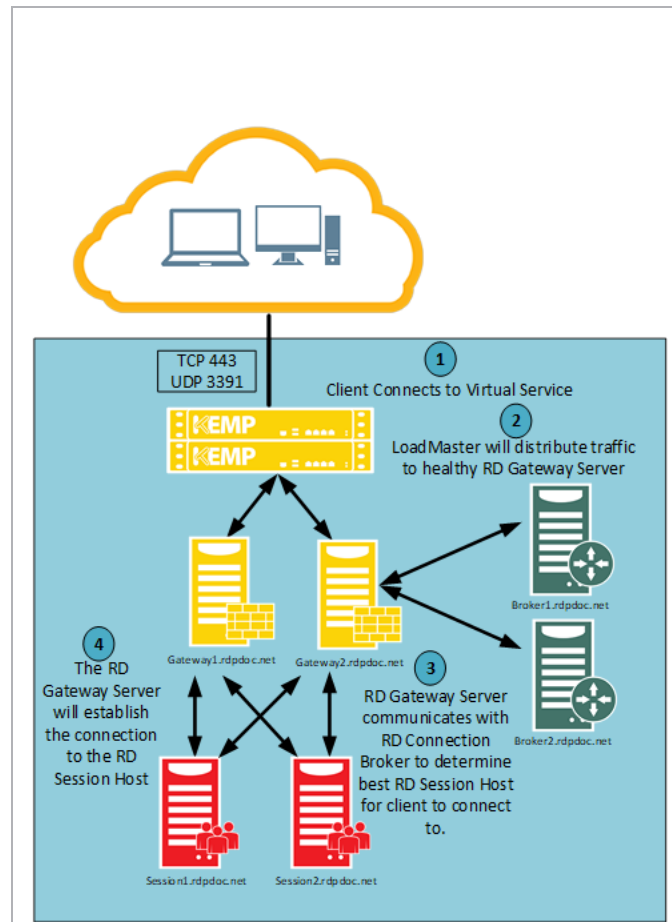


2.1.3 Load Balancing Remote Desktop Connection Broker


The Microsoft Remote Desktop Connection Broker (RD Connection Broker) role has two responsibilities. First, since Windows Server 2012 the RD Connection Broker role always handles the initial RDP connection and sends the session to the RD Session Host with the least load. Second, the RD Connection Broker makes sure that users are able to reconnect to an existing (disconnected) session. Since Windows Server 2012, end users connecting to the environment always make an initial RDP connection to the RD Connection Broker. The RD Connection Broker then reroutes the user to the RD Session Host server with the least load (based on the load balancing mechanism within the RD Connection Broker) or reroutes the user to an existing (disconnected) session.

RDP traffic running on port 3389 must be load balanced in the LoadMaster.

2 RDS Load Balancing Scenarios

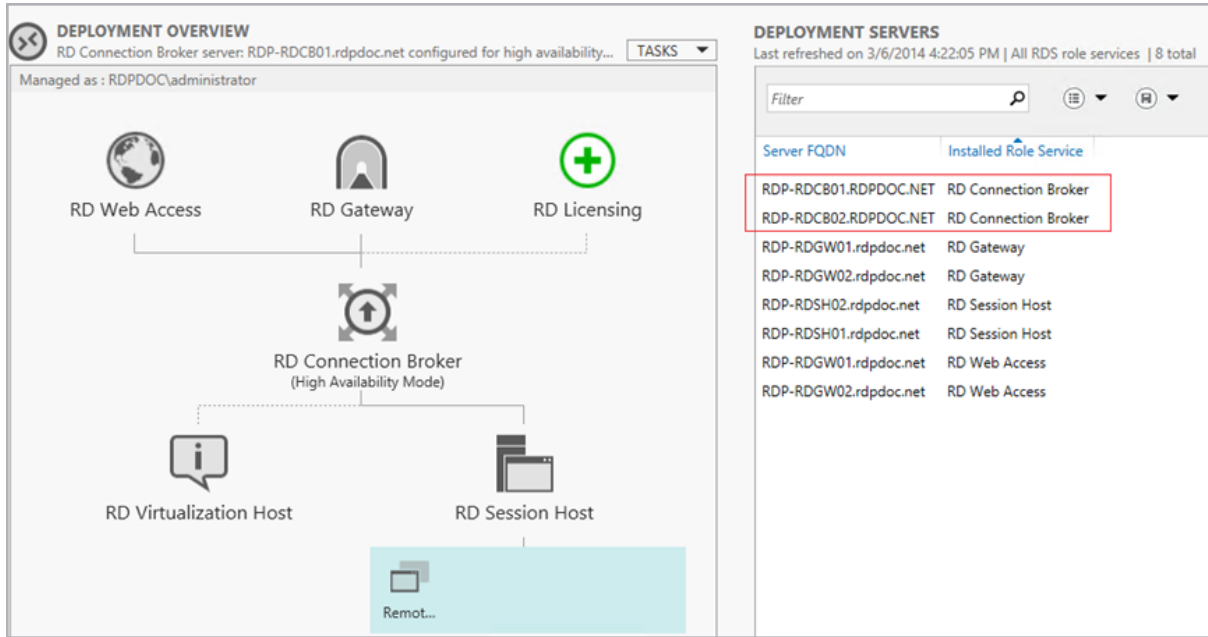

After the RD Connection Broker role is installed, you can use the Remote Desktop Management Services (RDMS) console as part of the Server Manager to retrieve the RD Connection Broker servers as part of the deployment.

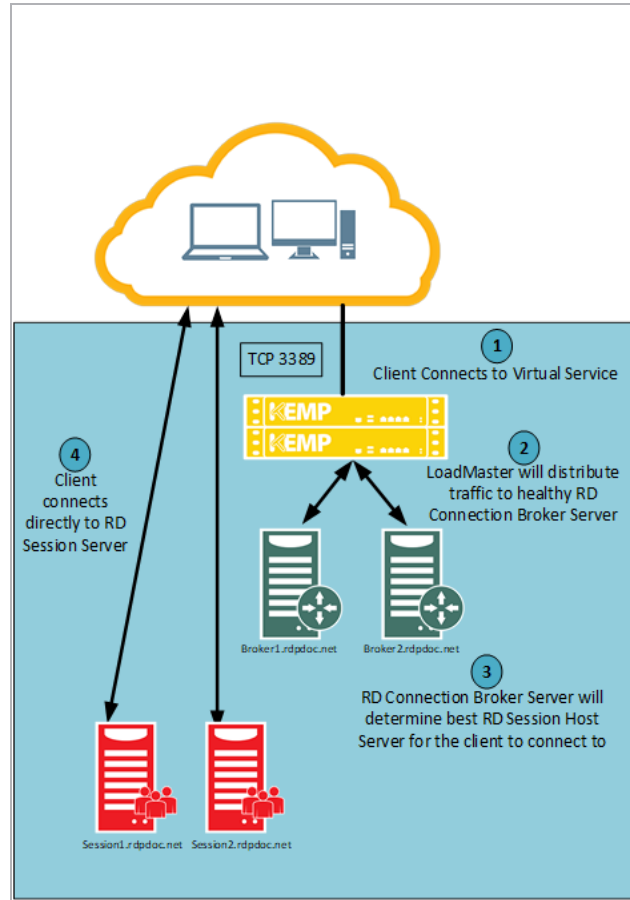


2.1.4 Load Balancing Remote Desktop Session Host

The Microsoft Remote Desktop Session Host (RD Session Host) holds the actual user sessions running the published Remote App or Full Desktop.


RDP traffic running on port 3389 must be load balanced in the LoadMaster. In this scenario, the RD Connection Broker role functionality to redirect to an existing (disconnected) session is still in place, but the RD Connection Broker itself does not actively load balance sessions across RD Session Host servers.

2 RDS Load Balancing Scenarios

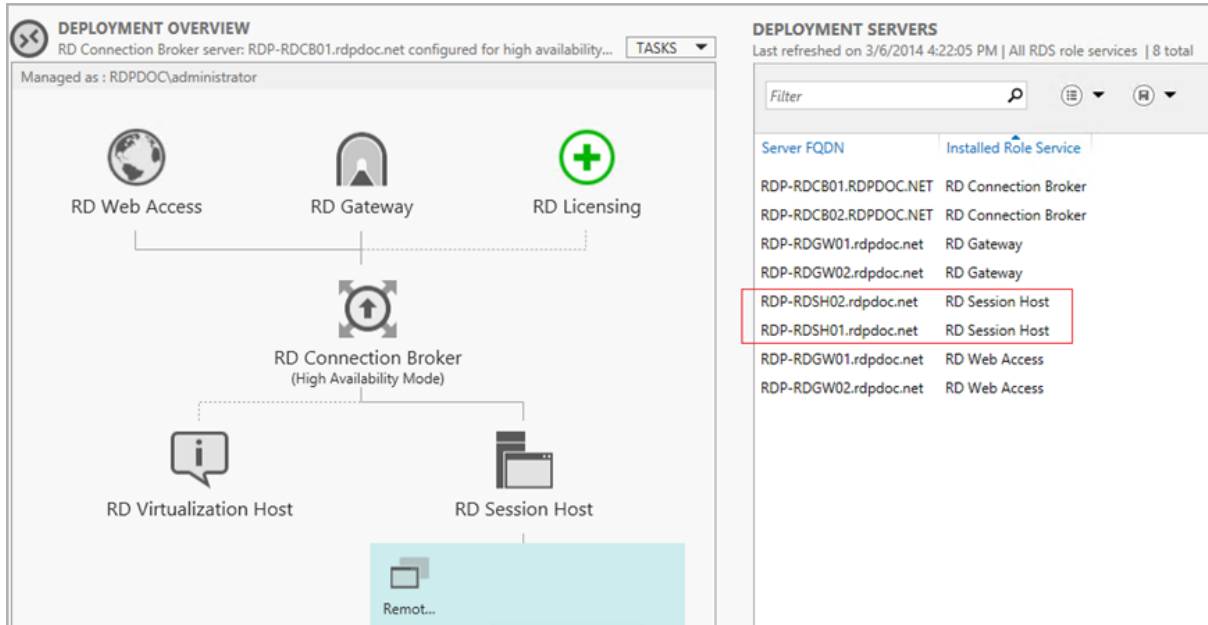

After the RD Session Host role is installed, you can use the Remote Desktop Management Services (RDMS) console as part of the Server Manager to retrieve the RD Session Host servers as part of the deployment.

Note that when load balancing the Session Hosts and using the Connection Broker, you must disable Connection Broker load balancing using Group Policy. You can view the required steps in the Implementing Remote Desktop Session Host Load Balancing section.

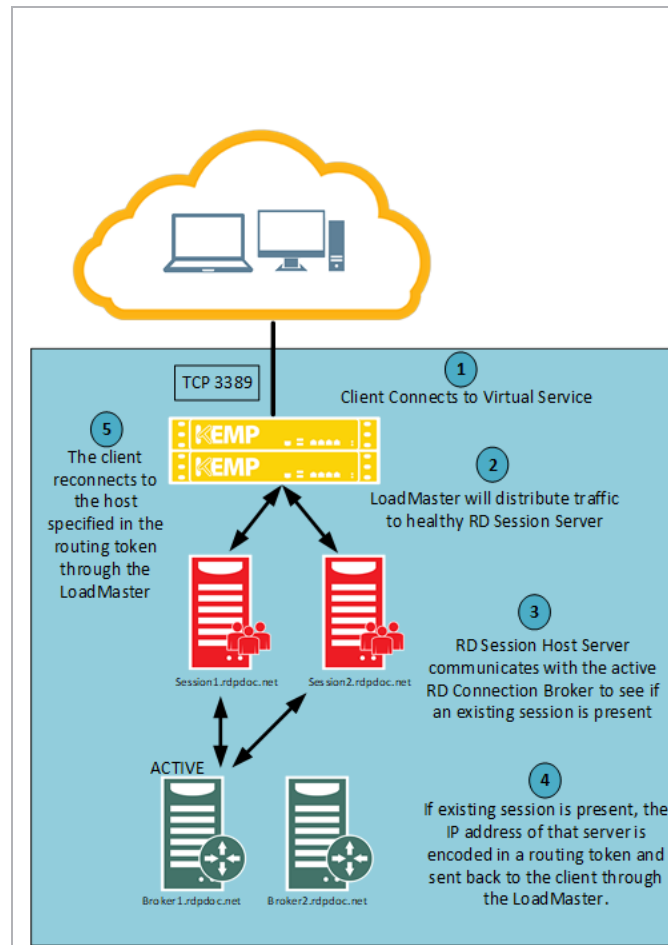

2.2 Deploying the Scenarios

2.2.1 Prerequisites

Several prerequisites are listed in the sections below.

2.2.1.1 Install an SSL Certificate on the LoadMaster

An SSL certificate must be installed on the LoadMaster for some of the services being load balanced. Before you import the certificate, make sure you have it available to the user who manages the LoadMaster. The certificate must match the hostname which is used to connect to the load balanced services of the LoadMaster. The hostname can be a single wildcard, for example, *.domain.com, or multiple regular certificates, for example, rdweb.domain.com.

To install an SSL certificate on the LoadMaster, follow the steps below in the LoadMaster Web User Interface (WUI):

2 RDS Load Balancing Scenarios

1. In the main menu, select **Certificates & Security > SSL Certificates**.

| | |
|---------------------------|---|
| Certificate Configuration | Import Certificate Add Intermediate |
|---------------------------|---|

2. Click **Import Certificate**.

| | | |
|------------------------|---|---------------------------|
| Certificate File | Choose File | certificate - Copy.pem |
| Key File (optional) | Choose File | No file chosen |
| Pass Phrase | <input type="password" value="....."/> | |
| Certificate Identifier | <input type="text" value="rdpdoc.net"/> | |
| | | Cancel Save |

3. Click **Choose File**.

4. Browse to and select the certificate.

5. Enter a **Pass Phrase** if needed.

6. Enter a name (preferably the DNS name of the service) in the **Certificate Identifier** field.

7. Click **Save** then click **OK**.

This certificate is assigned to some of the Virtual Services in later steps.

| | |
|------------------------------------|--|
| Administrative Certificates | |
| Administrative Certificate | <input type="text" value="rdpdoc.net"/> Use Certificate |

It is also possible to use this certificate for administrative purposes (browsing the LoadMaster WUI). To do this, on the **Manage Certificates** screen, select the certificate in the **Administrative Certificates** drop-down list and click **Use Certificate**.

2.2.1.2 Disable Options on the Real Servers

Disable the following two options on the Real Servers:


- Use IP Address Redirection
- Use RD Connection Broker load balancing

2.2.2 Implementing Remote Desktop Web Access Load Balancing

2.2.2.1 Prerequisites

As discussed in the **Load Balancing Remote Desktop Web Access** section, implementing load balancing for RD Web Access can be compared with a regular website running on the HTTPS protocol (port 443).

Before configuring the Kemp LoadMaster, ensure to have the DNS names and IP addresses available for all Web Servers running the RD Web Access role in your deployment.

| DEPLOYMENT SERVERS | |
|---|------------------------|
| Last refreshed on 3/3/2014 3:26:11 AM All RDS role services 8 total | |
| <div>Filter </div> | |
| Server FQDN | Installed Role Service |
| RDP-RDCB01.RDPDOC.NET | RD Connection Broker |
| RDP-RDCB02.RDPDOC.NET | RD Connection Broker |
| RDP-RDGW01.rdpdoc.net | RD Gateway |
| RDP-RDGW02.rdpdoc.net | RD Gateway |
| RDP-RDSH02.rdpdoc.net | RD Session Host |
| RDP-RDSH01.rdpdoc.net | RD Session Host |
| RDP-RDGW01.rdpdoc.net | RD Web Access |
| RDP-RDGW02.rdpdoc.net | RD Web Access |

To retrieve the RD Web Access servers in your deployment, open the Remote Desktop Management Services (RDMS) console as part of server manager, go to the **Overview**, and refer to the **Deployment Servers** section as shown above.


| PS C:\> Get-RDServer -ConnectionBroker rdp-rdc01.rdpdoc.net | |
|---|-------------------------------|
| Server | Roles |
| RDP-RDCB01.RDPDOC.NET | {RDS-CONNECTION-BROKER} |
| RDP-RDGW01.rdpdoc.net | {RDS-WEB-ACCESS, RDS-GATEWAY} |
| RDP-RDSH02.rdpdoc.net | {RDS-RD-SERVER} |
| RDP-RDSH01.rdpdoc.net | {RDS-RD-SERVER} |
| RDP-RDGW02.rdpdoc.net | {RDS-WEB-ACCESS, RDS-GATEWAY} |
| RDP-RDCB02.RDPDOC.NET | {RDS-CONNECTION-BROKER} |

2 RDS Load Balancing Scenarios

Alternatively, use the PowerShell equivalent by running the command **GET-RDServer** as part of the Remote Desktop PowerShell module.

| RD Web Access Server | IP Address |
|-----------------------|--------------|
| RDP-RDGW01.rdpdoc.net | 10.154.201.2 |
| RDP-RDGW01.rdpdoc.net | 10.154.201.3 |

In the above example, two RD Web Access servers are part of this deployment.

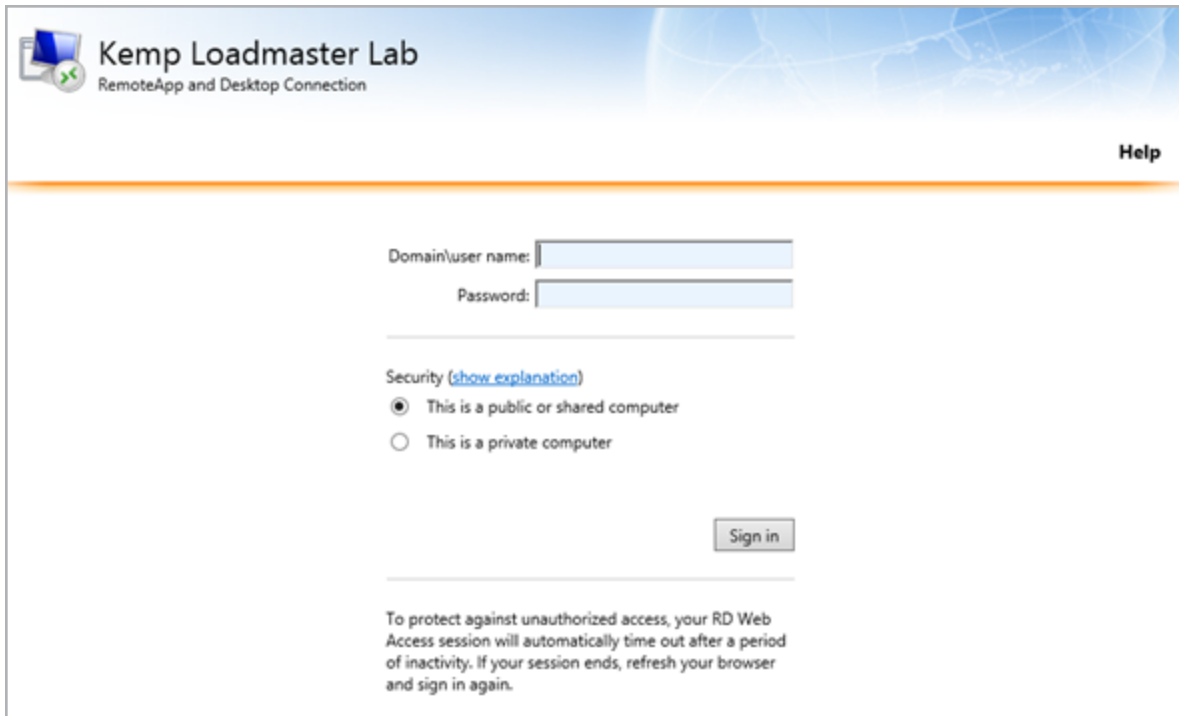

Ensure that all RD Web Access servers are accessible. This can be done by opening a web browser and browsing to each of the individual web servers, for example, **https://RDP-RDGW01.rdpdoc.net/rdweb**.


| Load Balanced DNS Name | Load Balanced IP Address |
|------------------------|--------------------------|
| rdpweb.rdpdoc.net | 10.154.11.51 |

Also, ensure you have an IP address and DNS available that is used to access the load-balanced RD Web Access environment. In our example, the above information was used.

2 RDS Load Balancing Scenarios

Ensure that a valid SSL certificate is configured within the RDS deployment which is trusted by the endpoints that is accessing the RD Web Access environment. The SSL certificate can be centrally configured by following the steps below:

1. Open the Remote Desktop Management Services (RDMS) console.
2. Open **Collections** and select **Tasks**.
3. Click **Edit Deployment Properties**.

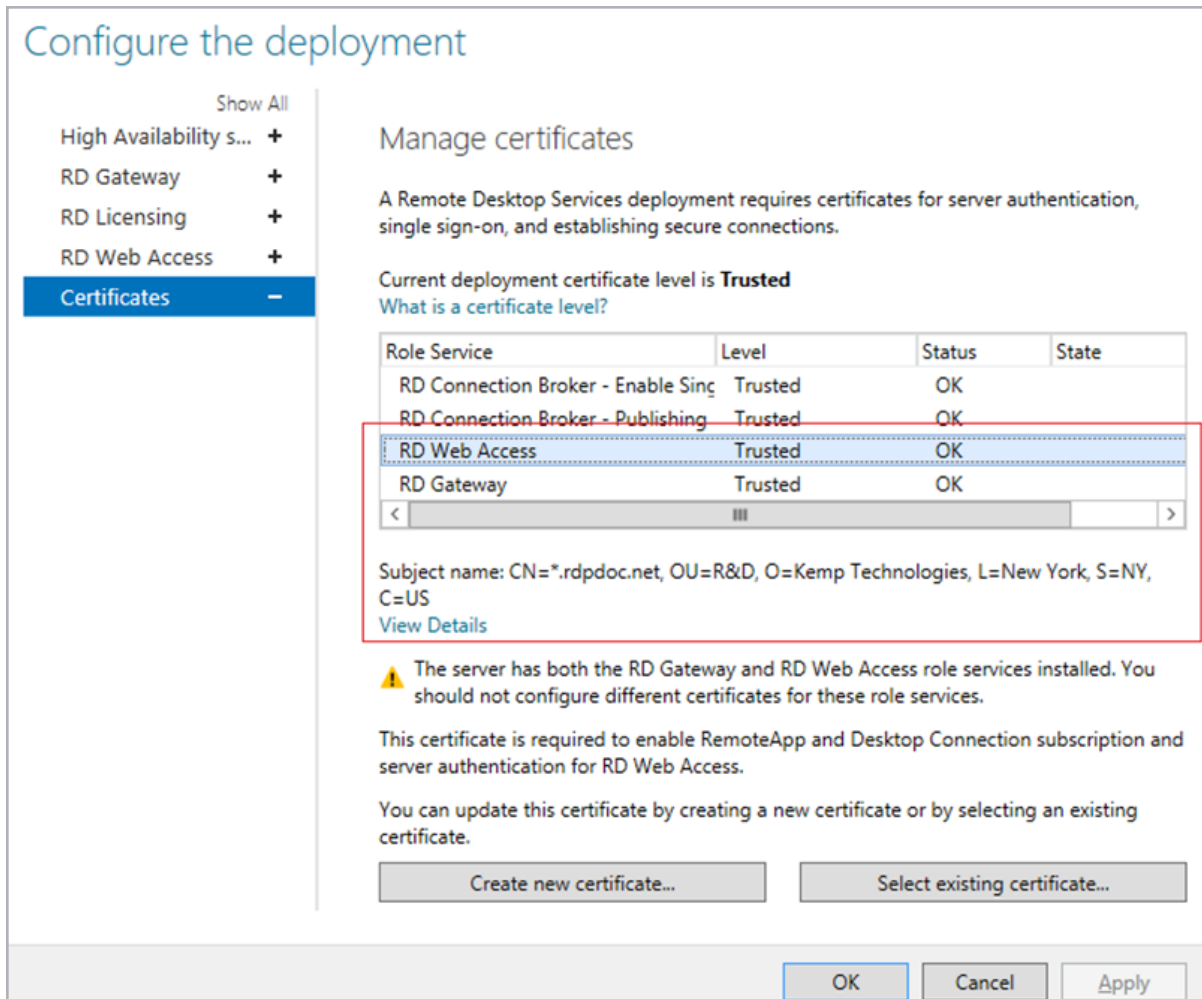

Configure the deployment

Show All

- High Availability s... +
- RD Gateway +
- RD Licensing +
- RD Web Access +
- Certificates -**

Manage certificates


A Remote Desktop Services deployment requires certificates for server authentication, single sign-on, and establishing secure connections.

Current deployment certificate level is **Trusted**
What is a certificate level?

| Role Service | Level | Status | State |
|------------------------------------|----------------|-----------|-------|
| RD Connection Broker - Enable Sing | Trusted | OK | |
| RD Connection Broker - Publishing | Trusted | OK | |
| RD Web Access | Trusted | OK | |
| RD Gateway | Trusted | OK | |

< ||| >

Subject name: CN=*.rdpdoc.net, OU=R&D, O=Kemp Technologies, L=New York, S=NY, C=US
[View Details](#)

 The server has both the RD Gateway and RD Web Access role services installed. You should not configure different certificates for these role services.

This certificate is required to enable RemoteApp and Desktop Connection subscription and server authentication for RD Web Access.

You can update this certificate by creating a new certificate or by selecting an existing certificate.

Create new certificate... Select existing certificate...

OK Cancel Apply

4. Select the **Certificates** tab.
5. Ensure a valid certificate is selected and (if needed) create a new certificate or select a different certificate.

2.2.2.2 Implementation

Configure the LoadMaster settings by following the steps below in the LoadMaster WUI:

1. In the main menu, select **Virtual Services** and **Add New**.

| | |
|-------------------------|--|
| Virtual Address | <input type="text" value="10.154.11.51"/> |
| Port | <input type="text" value="443"/> |
| Service Name (Optional) | <input type="text" value="RD Web Access"/> |
| Use Template | <input type="text" value="Select a Template"/> |
| Protocol | <input type="text" value="tcp"/> |

2. Enter the relevant IP address in the **Virtual Address** text box.
3. Enter **443** as the **Port**.
4. Enter a recognizable **Service Name**, such as **RD Web Access**.
5. Click **Add this Virtual Service**.

| Section | Option | Value | Comment |
|-------------------------|-------------------------|-------------------|---|
| Standard Options | Transparency | Disabled | |
| | Persistence Method | Source IP Address | |
| | Scheduling Method | least connection | |
| | Idle Connection Timeout | 660 | |
| SSL Properties | SSL Acceleration | Enabled Reencrypt | A wildcard certificate allows secure connections to be established with a request URL in the format of *.example.com. With this approach, a single certificate secures traffic for all clients in a multi-tenant environment. |
| | Reencrypt | Enabled | |
| | Supported | TLS1.0 | While this workload may not support TLS1.3 yet, |
| | | | |

| Section | Option | Value | Comment |
|----------------------------|------------------------------|---------------------------------|--|
| | Protocols | TLS1.1 | Kemp recommend enabling it for future proofing. |
| | | TLS1.2 | |
| | | TLS1.3 | |
| | Cipher Set | Best Practices | For further information on cipher sets, refer to the SSL Accelerated Services, Feature Description on the Kemp Documentation page . |
| Advanced Properties | Content Switching | Disabled | |
| | Add HTTP Headers | Legacy Operation (X-ClientSide) | |
| Real Servers | Real Server Check Parameters | HTTPS Protocol | |
| | Checked Port | 443 | |
| | URL | /rdweb | |
| | HTTP Method | HEAD | |

6. Enter the details as shown in the **Web Access Values** table.

7. Expand the **Real Servers** section.

8. Click **Add This Real Server**.

9. Add all required Real Servers.

2.2.2.3 Testing


After following the implementation steps in the previous section, follow the steps below to test the load-balanced RD Web Access environment:

1. Open a web browser that is able to reach the load-balanced IP.

2 RDS Load Balancing Scenarios

2. Browse to the configured DNS name for the load-balanced service, for example, **http://rdp-rdweb.rdpdoc.net/rdweb**. A web page should be presented with the RD Web Access login page. This indicates that the LoadMaster has redirected the session to a Real Server.

3. In the main menu of the LoadMaster WUI, select **Statistics > Real Time Statistics**.

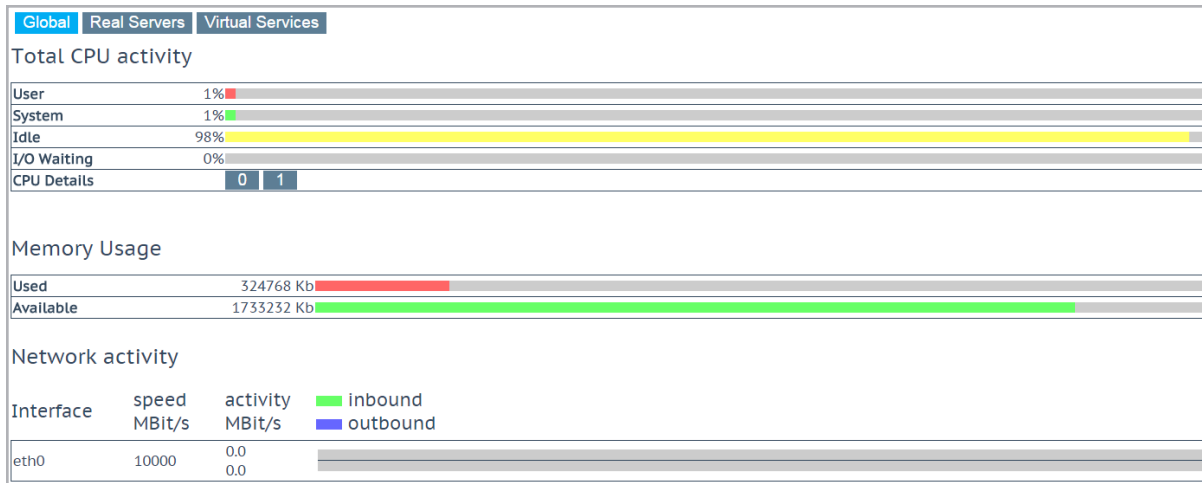

4. Click the **Real Servers** button.

| Global Real Servers Virtual Services | | | | | | | | | | Connections | Bytes | Bits | Packets |
|--------------------------------------|--------------------|--------|-------------|-------------|--------|---------|--------|--------------|------------------------|-------------|-----------|------|---------|
| Name | RS-IP | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/sec | [%] | Conns/sec | | |
| 1→ | 10.154.201.2 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | |
| 2→ | 10.154.201.3 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | |
| 2 | System Total Conns | | 0 | 0 | 0 | 0 | 0 | 0 | 0 /sec | | | | |

This overview shows the active sessions, sessions over the last hour, in addition to how many requests each Real Server handled.

5. Open another web browser on a different client and perform steps 1 and 2 above.

| Global Real Servers Virtual Services | | | | | | | | | | Connections | Bytes | Bits | Packets |
|--------------------------------------|--------------------|--------|-------------|-------------|--------|---------|--------|--------------|------------------------|-------------|-----------|------|---------|
| Name | RS-IP | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/sec | [%] | Conns/sec | | |
| 1→ | 10.154.201.2 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | |
| 2→ | 10.154.201.3 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | |
| 2 | System Total Conns | | 0 | 0 | 0 | 0 | 0 | 0 | 0 /sec | | | | |

6. Refresh the LoadMaster statistics page. Notice that, based on the load balancing method we chose, load is spread over both RD Web Access servers.

2.2.3 Implementing Remote Desktop Gateway Load Balancing

2.2.3.1 Prerequisites


As explained in the **Load Balancing Remote Desktop Gateway** section, implementing load balancing for RD Gateway is performed by load balancing HTTPS traffic on port 443 and UDP traffic on port 3391.

Before configuring the LoadMaster, ensure to have the DNS names and IP addresses of all servers running the RD Gateway role.

The TLS certificate used on the Virtual Service must be identical to the TLS certificate on the backend RD Gateway Server.

To retrieve the RD Gateway servers in your deployment, follow the steps below:

1. Open the Remote Desktop Management Services (RDMS) console.
2. Open the **Overview**.

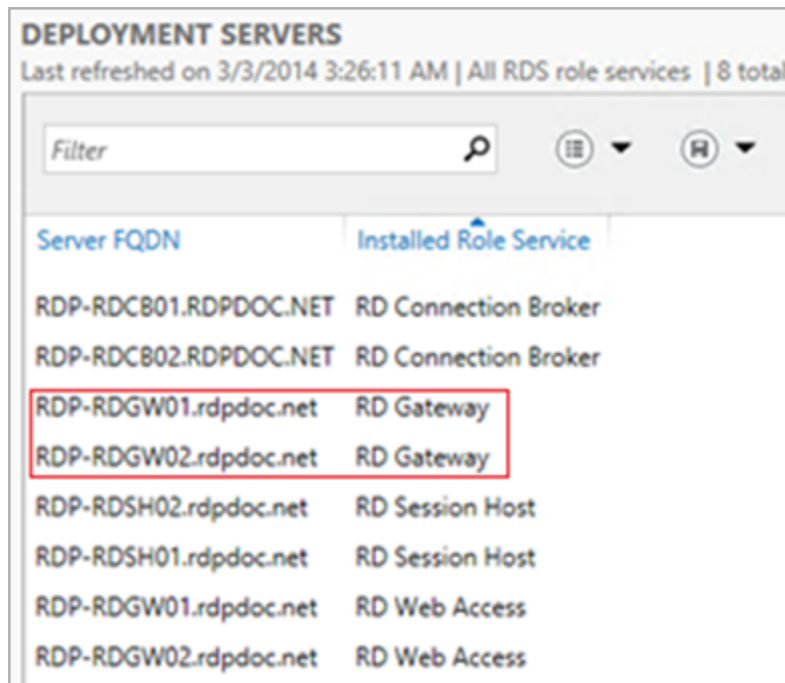

| Server FQDN | Installed Role Service |
|-----------------------|------------------------|
| RDP-RDCB01.RDPDOC.NET | RD Connection Broker |
| RDP-RDCB02.RDPDOC.NET | RD Connection Broker |
| RDP-RDGW01.rdpdoc.net | RD Gateway |
| RDP-RDGW02.rdpdoc.net | RD Gateway |
| RDP-RDSH02.rdpdoc.net | RD Session Host |
| RDP-RDSH01.rdpdoc.net | RD Session Host |
| RDP-RDGW01.rdpdoc.net | RD Web Access |
| RDP-RDGW02.rdpdoc.net | RD Web Access |

3. Refer to the **Deployment Servers** section.

2 RDS Load Balancing Scenarios


```
PS C:\> Get-RDServer -ConnectionBroker rdp-rdc01.rdpdoc.net

Server                               Roles
-----
RDP-RDCB01.RDPDOC.NET               {RDS-CONNECTION-BROKER}
RDP-RDGW01.rdpdoc.net               {RDS-WEB-ACCESS, RDS-GATEWAY}
RDP-RDSH02.rdpdoc.net               {RDS-RD-SERVER}
RDP-RDSH01.rdpdoc.net               {RDS-RD-SERVER}
RDP-RDGW02.rdpdoc.net               {RDS-WEB-ACCESS, RDS-GATEWAY}
RDP-RDCB02.RDPDOC.NET               {RDS-CONNECTION-BROKER}
```

Alternatively, use the PowerShell equivalent by running the command **GET-RDServer** as part of the Remote Desktop PowerShell module.

| RD Web Access Server | IP Address |
|-----------------------|--------------|
| RDP-RDGW01.rdpdoc.net | 10.154.201.2 |
| RDP-RDGW01.rdpdoc.net | 10.154.201.3 |

In the above example, two RD Gateway servers are part of this deployment.

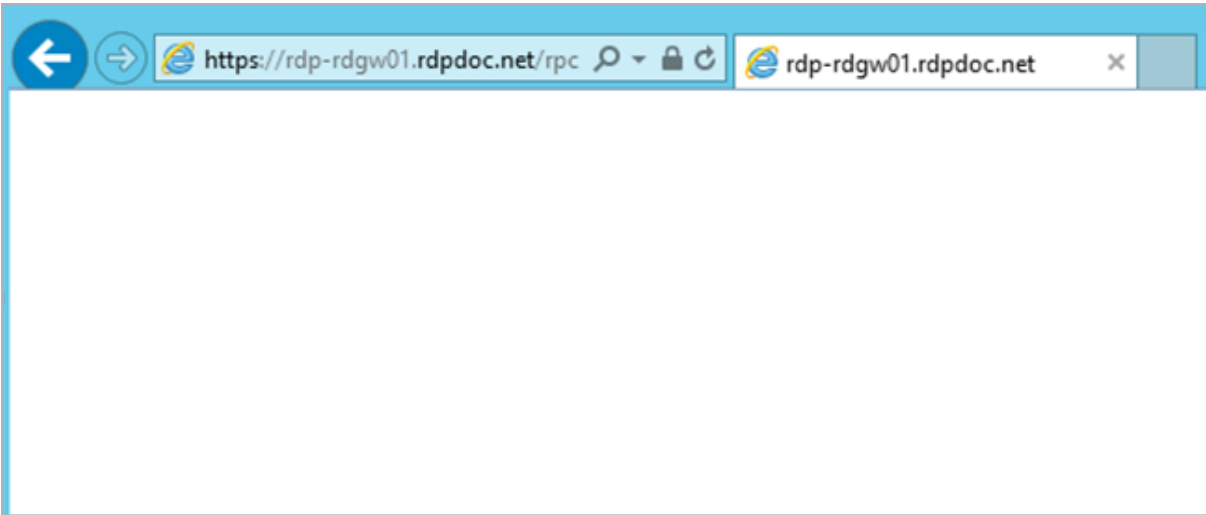

Ensure that all Remote Desktop Gateway servers are accessible. To do this, open a web browser and go to each of the individual web servers, for example, **https://RDP-RDGW01.rdpdoc.net/rpc**. This should bring up an authentication request. After supplying domain credentials, a blank screen should appear. This indicates that the service is reachable.


| Load Balanced DNS Name | Load Balanced IP Address |
|------------------------|--------------------------|
| rdgw.rdpdoc.net | 10.154.11.52 |

2 RDS Load Balancing Scenarios

Also, ensure you have an IP address and DNS available that is used to access the load-balanced RD Web Access environment. In our example, the above information was used.

Ensure that a valid SSL certificate is configured within the RDS deployment which is trusted by the endpoints that are accessing the RD Gateway environment. The SSL certificate can be centrally configured by following the steps below:

1. Open the Remote Desktop Management Services (RDMS) console.
2. Open **Collections** and select **Tasks**.
3. Click **Edit Deployment Properties**.

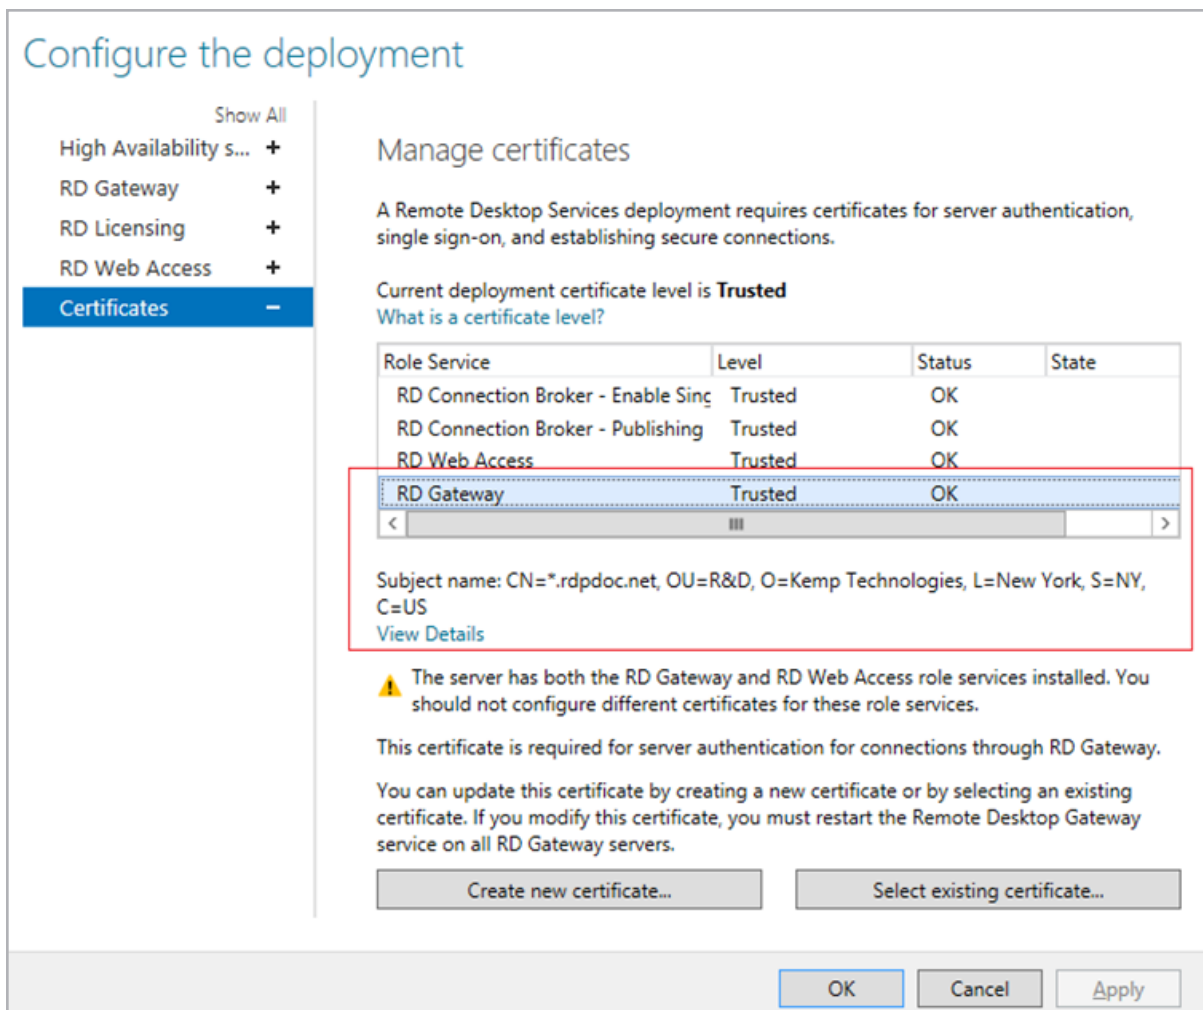

Configure the deployment

Show All

- High Availability s... +
- RD Gateway +
- RD Licensing +
- RD Web Access +
- Certificates -**

Manage certificates


A Remote Desktop Services deployment requires certificates for server authentication, single sign-on, and establishing secure connections.

Current deployment certificate level is **Trusted**
[What is a certificate level?](#)

| Role Service | Level | Status | State |
|------------------------------------|----------------|-----------|-------|
| RD Connection Broker - Enable Sing | Trusted | OK | |
| RD Connection Broker - Publishing | Trusted | OK | |
| RD Web Access | Trusted | OK | |
| RD Gateway | Trusted | OK | |

< ||| >

Subject name: CN=*.rdpdoc.net, OU=R&D, O=Kemp Technologies, L=New York, S=NY, C=US
[View Details](#)

 The server has both the RD Gateway and RD Web Access role services installed. You should not configure different certificates for these role services.

This certificate is required for server authentication for connections through RD Gateway.

You can update this certificate by creating a new certificate or by selecting an existing certificate. If you modify this certificate, you must restart the Remote Desktop Gateway service on all RD Gateway servers.

Create new certificate... Select existing certificate...

OK Cancel Apply

4. Select the **Certificates** tab.

5. Ensure a valid certificate is selected and (if needed) create a new certificate or select a different certificate.

2.2.3.2 Implementation

Configure the LoadMaster settings by following the steps below in the LoadMaster WUI:

1. In the main menu, select **Virtual Services** and **Add New**.

| | |
|-------------------------|--|
| Virtual Address | <input type="text" value="10.154.11.52"/> |
| Port | <input type="text" value="443"/> |
| Service Name (Optional) | <input type="text" value="RD Gateway"/> |
| Use Template | <input type="text" value="Select a Template"/> |
| Protocol | <input type="text" value="tcp"/> |

2. Enter the relevant IP address in the **Virtual Address** text box.
3. Enter **443** as the **Port**.
4. Enter a recognizable **Service Name**, such as **RD Gateway**.
5. Click **Add this Virtual Service**.

If you are running Remote Desktop Services in the cloud, you must configure the Remote Desktop Gateway to be at Layer 7. In the **Standard Options** section, disable **Layer 4** and ensure **Transparency** is disabled. When you disable **Layer 4** it should set the Real Server **Forwarding method** to **NAT**. These settings are required because the Microsoft Azure or Amazon Web Services (AWS) firewall blocks the traffic when it is directly returned to the client.

| Section | Option | Value | Comment |
|------------------|---------------------|-------------------|---------|
| Standard Options | Transparency | Disabled | |
| | Persistence Mode | Source IP Address | |
| | Persistence Timeout | 1 Hour | |

2 RDS Load Balancing Scenarios

| Section | Option | Value | Comment |
|----------------------------|--------------------------|--------------------------------------|---|
| | Scheduling Method | least connection | |
| | Idle Connection Timeout | 28,800 | |
| SSL Properties | SSL Acceleration | Enabled | A wildcard certificate allows secure connections to be established with a request URL in the format of *.example.com. With this approach, a single certificate secures traffic for all clients in a multi-tenant environment. |
| | Reencrypt | Enabled | |
| | Supported Protocols | TLS1.0 TLS1.1 TLS1.2 TLS1.3 | While this workload may not support TLS1.3 yet, Kemp recommend enabling it for future proofing. |
| | Cipher Set | Best Practices | For further information on cipher sets, refer to the SSL Accelerated Services, Feature Description on the Kemp Documentation page . |
| Advanced Properties | Content Switching | Disabled | |
| | Add HTTP Headers | Legacy Operation(X-ClientSide) | |
| Real Servers | Real Server Check Method | HTTPS Protocol | |
| | Checked Port | 443 | |
| | URL | /rpc | |
| | HTTP Method | HEAD | |

6. Enter the settings based on the recommended values above.

2 RDS Load Balancing Scenarios

RDP version 8 and above contains new features that use UDP as well as TCP to increase performance over networks with low bandwidth, high latency, or high packet loss. The UDP protocol is also used by the RD Gateway. To allow usage of these protocol enhancements, you must configure the RD Gateway to allow load balancing of UDP traffic. To do this, follow the steps below:

7. In the main menu of the LoadMaster WUI, select **Virtual Services > Add New**.

| | |
|-------------------------|--|
| Virtual Address | <input type="text" value="10.154.11.52"/> |
| Port | <input type="text" value="3391"/> |
| Service Name (Optional) | <input type="text" value="RDP Gateway UDP"/> |
| Use Template | <input type="text" value="Select a Template"/> |
| Protocol | <input type="text" value="udp"/> |

8. In the **Virtual Address** text box, enter the same IP address that was used in the previous TCP Gateway configuration, for example, **10.154.11.52**.
9. Enter **3391** as the **Port**.
10. Select **udp** as the **Protocol**.
11. Click **Add this Virtual Service**.

| Section | Option | Value | Comment |
|------------------|---------------------|-------------------|---|
| Standard Options | Transparency | Enabled | |
| | Persistence Mode | Source IP Address | |
| | Persistence Timeout | 1 Hour | |
| | Scheduling Method | least connection | In most RD Gateway environments, configuring Least Connection is the most suitable option. However, any option can be selected. For example, if a relative weight is configured to an RD Gateway Server, selecting weighted least connection here would also add the configured weight as a factor in calculating the schedule. |
| Real | Real Server | | |


| Section | Option | Value | Comment |
|---------|-------------------|---------------|---------|
| Servers | Check Method | ICMP Ping | |
| | Port | 3391 | |
| | Forwarding Method | Direct return | |

12. Enter the settings based on the recommended values above.


Cloud Deployments – The UDP traffic for RDP version 8 must be set to use Layer 7 when deployed in cloud environments. In the Standard Options section, disable **Transparency** and ensure that the forwarding method is set to **NAT**. These settings are required because the Microsoft Azure or Amazon Web Services (AWS) firewall blocks traffic that is directly returned to the client.

Non-Cloud Deployments -The UDP traffic for RDP version 8 can be configured to use Direct Server Return (DSR). Therefore, you must make some changes to the RD Gateway Servers to make the setup work. To make these changes, follow the steps below:


1. Open the **Device Manager** on both RD Gateway Servers.

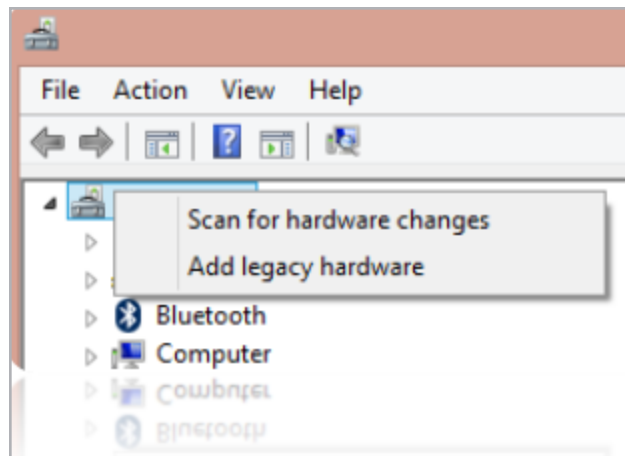

2. Right-click the computer name and select **Add legacy hardware**.

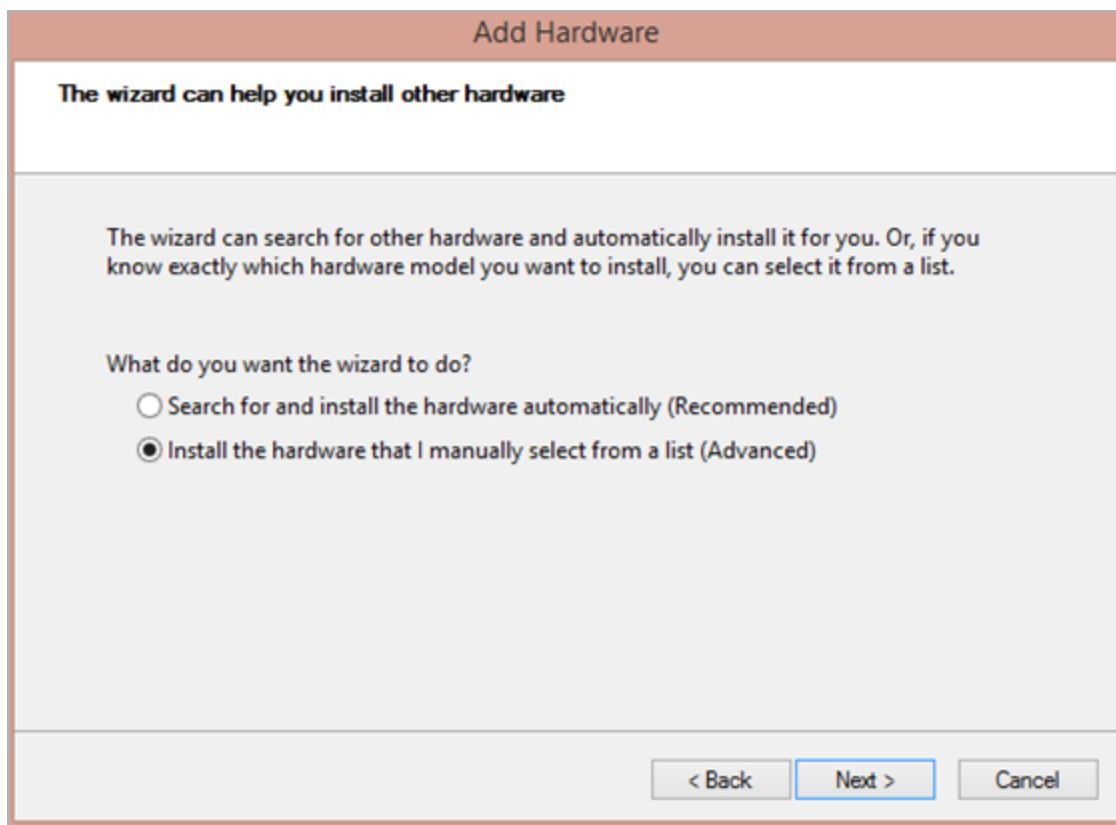


3. Select **Install the hardware that I manually select from a list (Advanced)**.
4. Click **Next**.

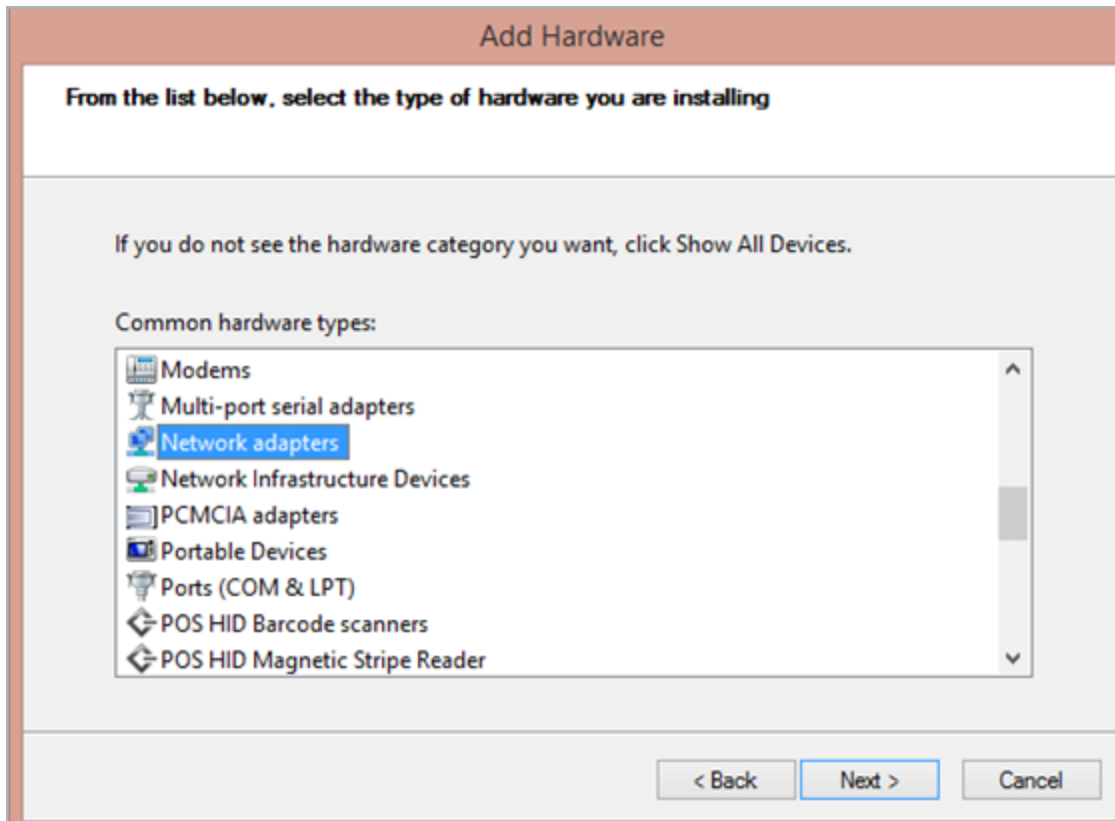


5. Select **Network adapters**.

6. Click **Next**.

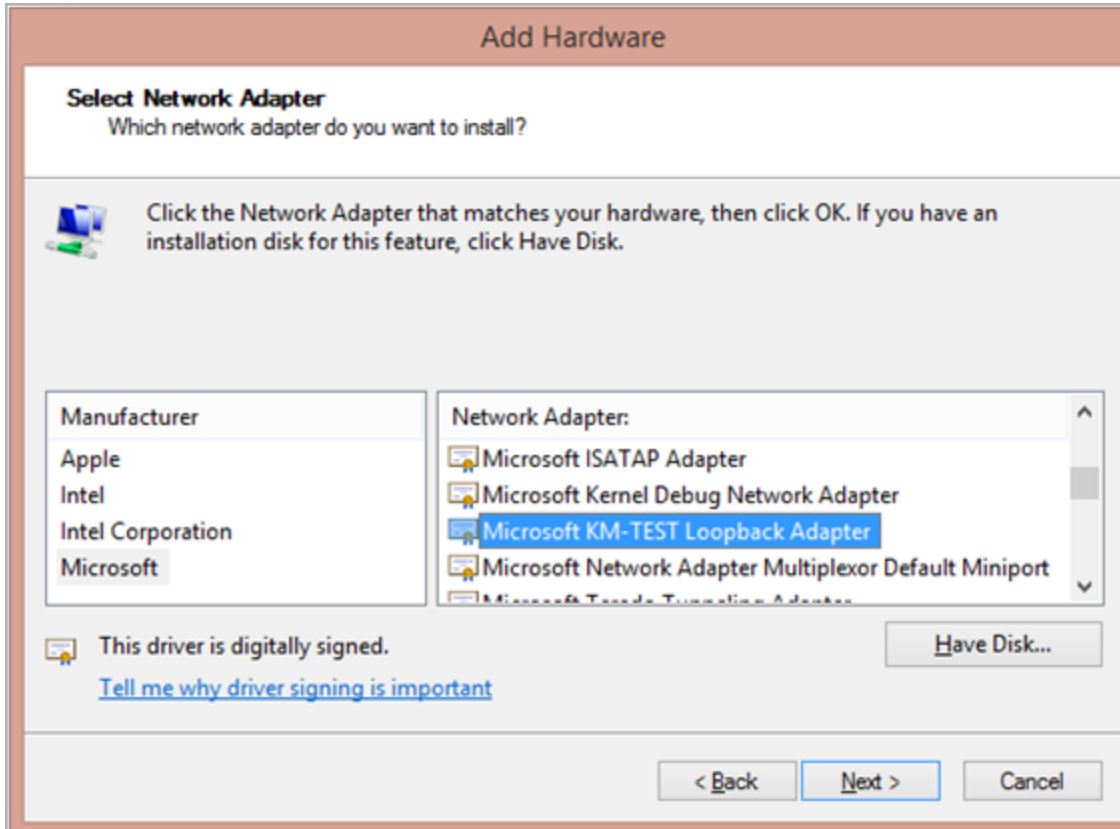


7. Select the **Microsoft KM-TEST Loopback Adapter**.

8. Click **Next**.

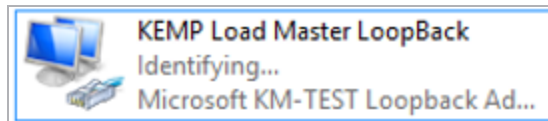


9. This creates a new network adapter. To make it easier to identify, rename it, for example to **Kemp LoadMaster LoopBack**.

10. Open the TCP/IP properties.

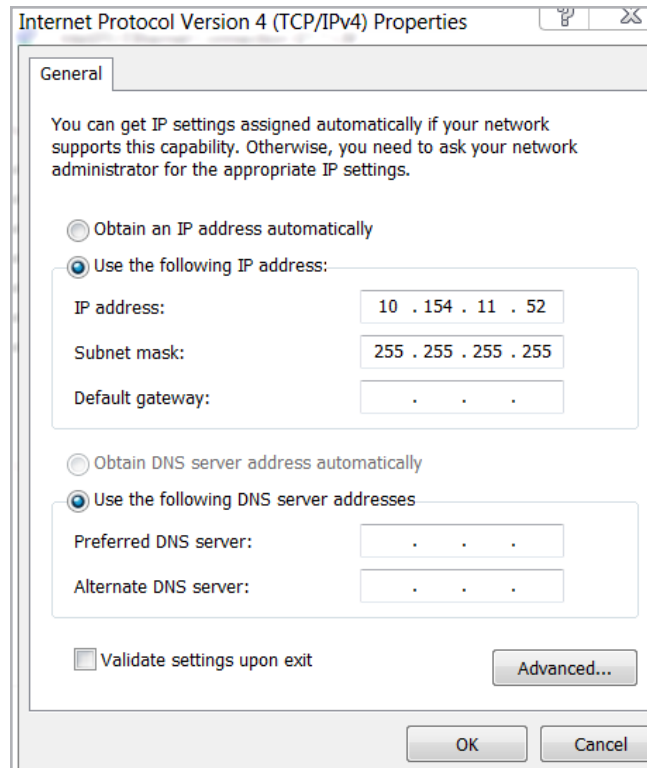

11. In the **IP address** text box, enter the IP address that matches the Virtual Service address.
12. Enter **255.255.255.255** in the **Subnet mask** text box.
13. Click the **Advanced** button.

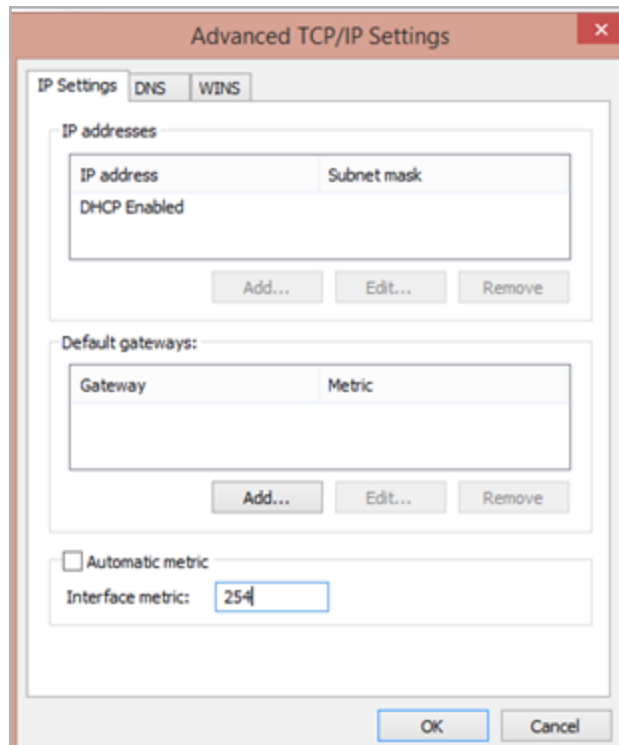

14. Enter **254** in the **Interface metric** text box.

15. Click **OK**.

16. Click **OK** again.

17. Run the following three commands (using elevated permissions) in the console. Enter the name of the loopback adapter where **<loopback>** is mentioned. Enter the name of the primary network adapter where **<net>** is mentioned.

netsh interface ipv4 set interface <net> weakhostreceive=enabled
netsh interface ipv4 set interface <loopback> weakhostreceive=enabled

netsh interface ipv4 set interface <loopback> weakhostsend=enabled

2.2.3.3 Testing

After following the implementation steps in the previous section, follow the steps below to test the load-balanced RD Gateway environment:


1. Open an RDP connection to the RDS 2012 deployment. This can be performed in various ways:
 - Use RD Web Access. Refer to the **Load Balancing Remote Desktop Web Access** section.

2 RDS Load Balancing Scenarios

5. Refresh the LoadMaster statistics page. Notice that, based on the load balancing method selected, load is spread over both RD Gateway servers.

To ensure that the new HTTP-based transport protocol of the RD Gateway on Windows Server 2012 is being leveraged, follow the steps below:

6. Log in to the RD Gateway Server that holds the active test session.

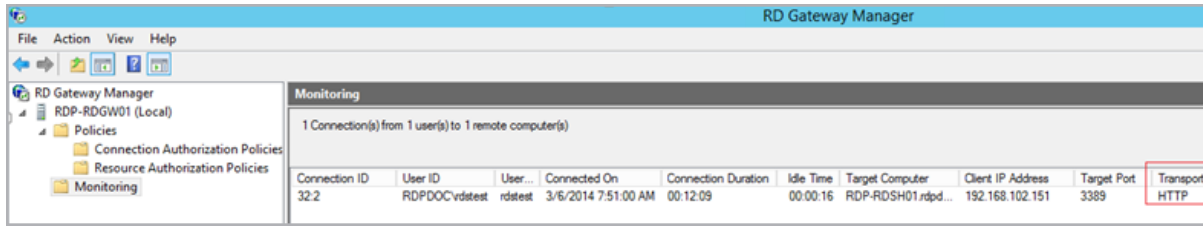

7. Open **Administrative Tools** and then **Remote Desktop Gateway Manager**.

8. Expand your RD Gateway server and click **Monitoring**.


9. Confirm that your active session uses **HTTP** as the **Transport**, and not **RPC-HTTP**.

2.2.4 Implementing Remote Desktop Connection Broker Load Balancing

2.2.4.1 Prerequisites

As discussed in the **Load Balancing Remote Desktop Connection Broker** section, implementing load balancing for RD Connection Broker is performed by load balancing RDP traffic on port 3389. In this scenario, we load balance the initial sessions that users perform on the RD Connection Broker.

Before configuring the Kemp LoadMaster, ensure to have the DNS names and IP addresses available for all Web Servers running the RD Connection Broker role in your deployment.

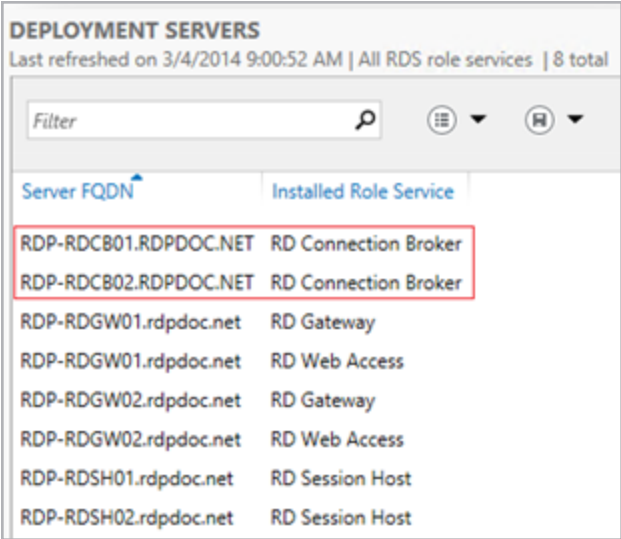

To retrieve the RD Connection Broker servers in your deployment, open the Remote Desktop Management Services (RDMS) console as part of server manager, go to the **Overview**, and refer to the **Deployment Servers** section as shown above.

```
PS C:\> Get-RDServer -ConnectionBroker rdp-rcb01.rdpdoc.net

Server                               Roles
-----
RDP-RDCB01.RDPDOC.NET                {RDS-CONNECTION-BROKER}
RDP-RDGW01.rdpdoc.net                {RDS-WEB-ACCESS, RDS-GATEWAY}
RDP-RDGH01.rdpdoc.net                {RDS-RD-SERVER}
RDP-RDGH02.rdpdoc.net                {RDS-RD-SERVER}
RDP-RDGW02.rdpdoc.net                {RDS-WEB-ACCESS, RDS-GATEWAY}
RDP-RDCB02.RDPDOC.NET                {RDS-CONNECTION-BROKER}
```

Alternatively, use the PowerShell equivalent by running the command **GET-RDServer** as part of the Remote Desktop PowerShell module.

| RD Web Access Server | IP Address |
|-----------------------|--------------|
| RDP-RDCB01.rdpdoc.net | 10.154.201.4 |
| RDP-RDCB01.rdpdoc.net | 10.154.201.5 |

In the above example, two RD Connection Broker servers are part of this deployment.

Ensure that all RD Broker servers are accessible on port 3389. This can be done by opening the command line and running the command **telnet <IPAddressOfConnectionBroker> 3389** or use **mstsc.exe** to open an RDP connection to the RD Connection Broker.


| Load Balanced DNS Name | Load Balanced IP Address |
|------------------------|--------------------------|
| rdsfarm.rdpdoc.net | 10.154.11.52 |

2 RDS Load Balancing Scenarios

Also, ensure you have an IP address and DNS available that are used to access the load balanced RD Connection Broker environment. In our example, the above information was used.

The DNS name must match the DNS Round Robin name as configured in the RDS deployment. To confirm the value, follow the steps below:

1. Open the Remote Desktop Management Services (RDMS) console.
2. Click **Collections**.
3. Select **Tasks**.
4. Click **Edit Deployment Properties**.

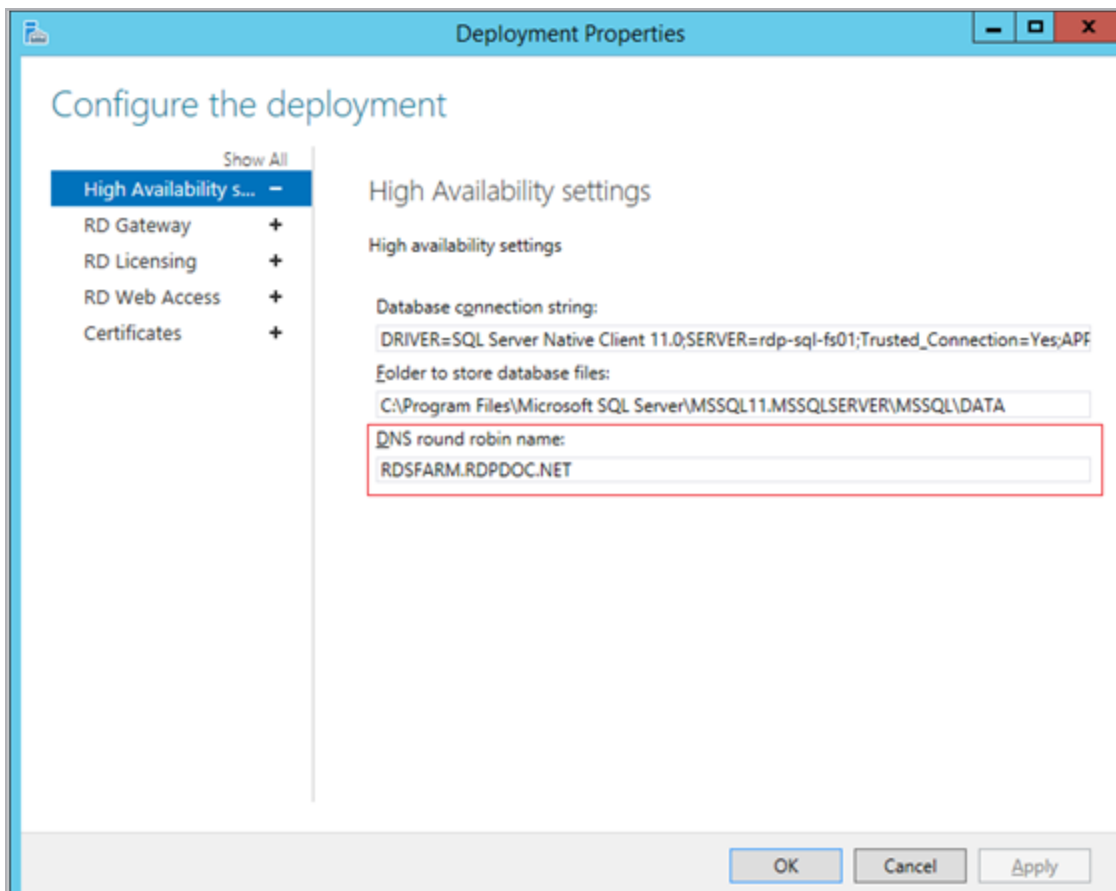

5. Select the **High Availability Settings** tab.

The value is displayed underneath **DNS round robin name**.

```
PS C:\> Get-RDConnectionBrokerHighAvailability -ConnectionBroker rdp-rdc01.rdpdoc.net

ActiveManagementServer : RDP-RDCB01.rdpdoc.net
ConnectionBroker        : {RDP-RDCB01.RDPDOC.NET, RDP-RDCB02.RDPDOC.NET}
ClientAccessName        : RDSFARM.RDPDOC.NET
DatabaseConnectionString : DRIVER=SQL Server Native Client 11.0;SERVER=rdp-sql-fs01;Trusted_Connection=Yes;APP=Remote
                          Desktop Services Connection Broker;DATABASE=RDMS
DatabaseFilePath        : C:\Program Files\Microsoft SQL Server\MSSQL11.MSSQLSERVER\MSSQL\DATA\RDMS.mdf
```

Alternatively, use the PowerShell equivalent by running the command **Get-RDConnectionBrokerHighAvailability** in the Remote Desktop PowerShell module.

Ensure that a valid SSL certificate is configured within the RDS deployment which is trusted by the endpoints that is accessing the RD Connection Broker environment. The SSL certificate can be centrally configured by following the steps below:

1. Open the Remote Desktop Management Services (RDMS) console.
2. Open **Collections** and select **Tasks**.
3. Click **Edit Deployment Properties**.

Configure the deployment

Show All

High Availability s... +
RD Gateway +
RD Licensing +
RD Web Access +
Certificates -

Manage certificates

A Remote Desktop Services deployment requires certificates for server authentication, single sign-on, and establishing secure connections.

Current deployment certificate level is **Trusted**
What is a certificate level?

| Role Service | Level | Status | State |
|------------------------------------|---------|--------|-------|
| RD Connection Broker - Enable Sinc | Trusted | OK | |
| RD Connection Broker - Publishing | Trusted | OK | |
| RD Web Access | Trusted | OK | |
| RD Gateway | Trusted | OK | |

Subject name: CN=*.rdpdoc.net, OU=R&D, O=Kemp Technologies, L=New York, S=NY, C=US
[View Details](#)

This certificate is required for server authentication to the Remote Desktop Services deployment.

You can update this certificate by creating a new certificate or by selecting an existing certificate.

Create new certificate...
Select existing certificate...

OK
Cancel
Apply

4. Select the **Certificates** tab.

5. Ensure a valid certificate is selected and (if needed) create a new certificate or select a different certificate.

2.2.4.2 Implementation

Configure the LoadMaster settings by following the steps below in the LoadMaster WUI:

1. In the main menu, select **Virtual Services** and **Add New**.

| | |
|-------------------------|----------------------|
| Virtual Address | 10.154.11.52 |
| Port | 3389 |
| Service Name (Optional) | RD Connection Broker |
| Use Template | Select a Template ▼ |
| Protocol | tcp ▼ |

2. Enter the relevant IP address in the **Virtual Address** text box.

In our example the IP address is **10.154.11.52**.

3. Enter **3389** as the **Port**.

4. Enter a recognizable **Service Name**, such as **RD Connection Broker**.

5. Click **Add this Virtual Service**.

| Section | Option | Value | Comment |
|------------------|---------------------|---------------------------------------|---|
| Standard Options | Transparency | Disabled | |
| | Persistence Mode | Terminal Service or Source IP Address | In the Standard Options section, a Persistence Mode can be specified. The RD Connection Broker role itself does not rely on persistence. This is because the RD Connection Broker servers only handle the initial RDP request, it does not contain any active sessions. Therefore, the persistence mode can be left to the default option. |
| | Persistence Timeout | 1 Hour | |
| | Scheduling Method | Round robin | Because the RD Connection Broker servers do not contain any active sessions, the scheduling method does not really matter. Round Robin is the best suited option as this will ensure that the load is equally spread over the RD Connection Broker servers. Alternatively, choose Weighted Round Robin if the Real Servers have a non-default weight set. |
| | Idle Connection | 660 | |

| Timeout | | |
|--------------|--------------------------|--------------------------|
| Real Servers | Real Server Check Method | Remote Terminal Protocol |
| | Checked Port | 3389 |
| | Forwarding method | Nat |

6. Enter the settings based on the recommended values above.


2.2.4.3 Testing

After following the implementation steps in the previous section, follow the steps below to test the load balanced RD Connection Broker environment:

1. Open an RDP connection to the RDS 2012 deployment. This can be performed in various ways:

- Use RD Web Access. Refer to the **Load Balancing Remote Desktop Web Access** section.
- Use the Remote App and Desktop Connections (RADC) as part of the Control Panel.
- Manually create a .RDP file.

2. In the main menu of the LoadMaster WUI, select **Statistics**.

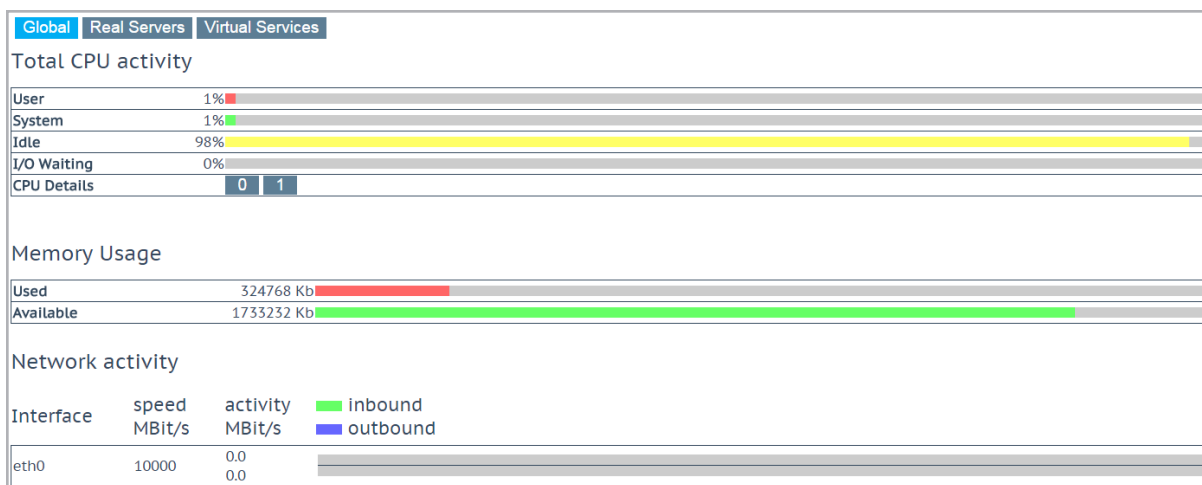

3. Click **Virtual Services**.

2 RDS Load Balancing Scenarios

| Global Real Servers Virtual Services | | | | | | | | | | | | | | Connections Bytes Bits | | |
|--------------------------------------|--------------------|----------|--------|-------------|-------------|--------|---------|--------|--------------|----------------------|--------------------|-----------|--|------------------------|--|--|
| Name | Virtual IP Address | Protocol | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/s | Real Servers RS-IP | % Conns/s | | | | |
| 1 RD Web Access | 10.154.11.51-443 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.1 | 0 | | | | |
| 2 RD Gateway | 10.154.11.52-443 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.3 | 0 | | | | |
| 3 RD Connection Broker | 10.154.11.52-3389 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.4 | 0 | | | | |
| 4 RDP Gateway UDP | 10.154.11.52-3389 | udp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.7-443 | 0 | | | | |
| System Total Conns | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0/sec | 10.154.201.8-443 | 0 | | | | |

This overview shows the active sessions, sessions over the last hour, in addition to how many requests each Real Server handled. As explained, because the RD Connection Broker Real Servers only handle the initial RDP connection, you will likely never see any active sessions because as soon as the RD Connection Broker has referred the user to an RD Session Host, the connection from the client to the RD Connection Broker is dropped as the client now has a connection with the RD Session Host itself.

4. Open another web browser on a different client and perform steps 1 and 2 above.

| Global Real Servers Virtual Services | | | | | | | | | | | Connections Bytes Bits Packets | | | | |
|--------------------------------------|--------------|--------|-------------|-------------|--------|---------|--------|--------------|------------------------|---|--------------------------------|--|--|--|--|
| Name | RS-IP | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/sec | % | Conns/sec | | | | |
| 1 | 10.154.201.2 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | |
| 2 | 10.154.201.3 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | |
| 3 | 10.154.201.4 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | |
| 4 | 10.154.201.5 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | |
| System Total Conns | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 /sec | | | | | | |

5. Refresh the LoadMaster statistics page. Notice that, based on the load balancing method we chose, load is spread over both RD Connection Broker servers.

2.2.5 Implementing Remote Desktop Session Host Load Balancing

2.2.5.1 Prerequisites

As discussed in the **Load Balancing Remote Desktop Session Host** section, implementing load balancing for RD Session Host is performed by load balancing RDP traffic on port 3389. In essence, the LoadMaster replaces the load balancing options that come with the Microsoft RD Connection Broker. It is important to realize that starting from Windows Server 2012, in most cases, Remote Desktop Services is deployed using the Scenario-Based Deployment as part of the Server Managed in Windows Server 2012. In these cases, you automatically get an RD Connection Broker as part of your deployment. This RD Connection Broker automatically starts load balancing sessions for the RD Session Host servers in your deployment. You will want to avoid this because it will result in double load balancing.

| RD Connection Broker | | | |
|--|----------------|---------|--|
| Select an item to view its description. | | | |
| Setting | State | Comment | |
| Configure RD Connection Broker farm name | Not configured | No | |
| Configure RD Connection Broker server name | Not configured | No | |
| Join RD Connection Broker | Not configured | No | |
| Use IP Address Redirection | Disabled | No | |
| Use RD Connection Broker load balancing | Disabled | No | |

To disable RD Connection Broker Load balancing and Use IP Address Redirection, create a Group Policy Object on the OU where your RD Session Host servers are located and set the following GPO to disabled:

Computer Configuration\Policies\Administrative Templates\Windows Components\Remote Desktop Services\Remote Desktop Session Host\RD Connection Broker\Use IP Address Redirection

Computer Configuration\Policies\Administrative Templates\Windows Components\Remote Desktop Services\Remote Desktop Session Host\RD Connection Broker\User RD Connection Broker load balancing

Disabling these options does not prevent the RD Connection Broker from allowing users to reconnect to an existing session. That functionality still operates.

Besides the Scenario-Based Deployment in Server Manager, you could also use the Role-Based Deployment and only deploy the RD Session Host servers. This would result in a set of RD Session Host servers without an RD Connection Broker, and thus the above GPO setting would not be needed.

Note that this approach leads to an environment where you cannot manage the RDS environment using the Server Manager Graphical User Interface (GUI). You would be fully dependent on GPO, Windows Management Instrumentation (WMI), and registry settings to manage your environment.

Before configuring the Kemp LoadMaster, ensure to have the DNS names and IP addresses available for all Web Servers running the RD Session Host role.

2 RDS Load Balancing Scenarios

DEPLOYMENT SERVERS
Last refreshed on 3/6/2014 4:33:44 AM | All RDS role services | 8 total

Filter

| Server FQDN | Installed Role Service |
|-----------------------|------------------------|
| RDP-RDCB01.RDPDOC.NET | RD Connection Broker |
| RDP-RDCB02.RDPDOC.NET | RD Connection Broker |
| RDP-RDGW01.rdpdoc.net | RD Gateway |
| RDP-RDGW01.rdpdoc.net | RD Web Access |
| RDP-RDGW02.rdpdoc.net | RD Gateway |
| RDP-RDGW02.rdpdoc.net | RD Web Access |
| RDP-RDSH01.rdpdoc.net | RD Session Host |
| RDP-RDSH02.rdpdoc.net | RD Session Host |

To retrieve the RD Session Host servers in your deployment, open the Remote Desktop Management Services (RDMS) console as part of server manager, go to the **Overview** and refer to the **Deployment Servers** section as shown above.

```
PS C:\> Get-RDServer -ConnectionBroker rdp-rcb01.rdpdoc.net
```

| Server | Roles |
|-----------------------|-------------------------------|
| RDP-RDCB01.RDPDOC.NET | {RDS-CONNECTION-BROKER} |
| RDP-RDGW01.rdpdoc.net | {RDS-WEB-ACCESS, RDS-GATEWAY} |
| RDP-RDSH02.rdpdoc.net | {RDS-RD-SERVER} |
| RDP-RDSH01.rdpdoc.net | {RDS-RD-SERVER} |
| RDP-RDGW02.rdpdoc.net | {RDS-WEB-ACCESS, RDS-GATEWAY} |
| RDP-RDCB02.RDPDOC.NET | {RDS-CONNECTION-BROKER} |

Alternatively, use the PowerShell equivalent by running the command **GET-RDServer** as part of the Remote Desktop PowerShell module.

| RD Web Access Server | IP Address |
|-----------------------|--------------|
| RDP-RDSH01.rdpdoc.net | 10.154.201.6 |
| RDP-RDSH02.rdpdoc.net | 10.154.201.7 |

In the above example, two RD Session Hosts servers are part of this deployment.

Ensure that all RD Session Host servers are accessible on port **3389**. This can be done by opening the command line and running the command **telnet <IPAddressOfConnectionBroker> 3389** or use **mstsc.exe** to open an RDP connection to the RDP Connection Broker.

| Load Balanced DNS Name | Load Balanced IP Address |
|------------------------|--------------------------|
| rdshfarm.rdpdoc.net | 10.154.11.53 |

Also, ensure you have an IP address and DNS available that are used to access the load balanced RD Session Host environment. In our example, the above information was used.

2.2.5.2 Implementation

Configure the LoadMaster settings by following the steps below in the LoadMaster WUI:

1. In the main menu, select **Virtual Services** and **Add New**.

| | |
|-------------------------|--|
| Virtual Address | <input type="text" value="10.154.11.53"/> |
| Port | <input type="text" value="3389"/> |
| Service Name (Optional) | <input type="text" value="RD Session Host"/> |
| Use Template | <input type="text" value="Select a Template"/> |
| Protocol | <input type="text" value="tcp"/> |

2. Enter the relevant IP address in the **Virtual Address** text box.

In our example, the IP address is **10.154.11.53**

3. Enter **3389** as the **Port**.
4. Enter a recognizable **Service Name**, such as **RD Session Host**.
5. Click **Add this Virtual Service**.

| Section | Option | Value | Comment |
|------------------|------------------|-----------------|--|
| Basic Properties | Service Type | Remote Terminal | |
| | Transparency | Disabled | |
| Standard Options | Persistence Mode | Session Broker | The LoadMaster is able to redirect a user to an existing (disconnected) session based on the persistence token. If you performed a deployment without an RD Connection Broker (role-based deployment), the persistence token is the pre-populated username sent by the client. Also, the pre-populated username relies on users to always pre-populate the username field and is limited to a total of eight characters including the domain name. |

2 RDS Load Balancing Scenarios

| | | | |
|---------------------|--------------------------|--------------------------|--|
| | Persistence Timeout | 1 Hour | |
| | Scheduling Method | least connection | To ensure that user sessions are equally spread over the RD Session Host servers, select the option Least Connection, or if you have configured a Weight on the Real Servers, set it to Weighted Least Connection. |
| | Idle Connection Timeout | 660 | |
| Real Servers | Real Server Check Method | Remote Terminal Protocol | |
| | Checked Port | 3389 | |
| | Forwarding method | Nat | |


6. Enter the settings based on the recommended values above.

2.2.5.3 Testing

After following the implementation steps in the previous section, follow the steps below to test the load balanced RD Session Host environment:

1. Open an RDP connection to the RDS 2012 deployment to make sure the destination of your RDP session points to the DNS name configured earlier (which points to the IP address of the RD Session Host Virtual Service). In our example, it is **rsdhfarm.rdpdoc.net**.
2. In the main menu of the LoadMaster WUI, select **Statistics**.

2 RDS Load Balancing Scenarios

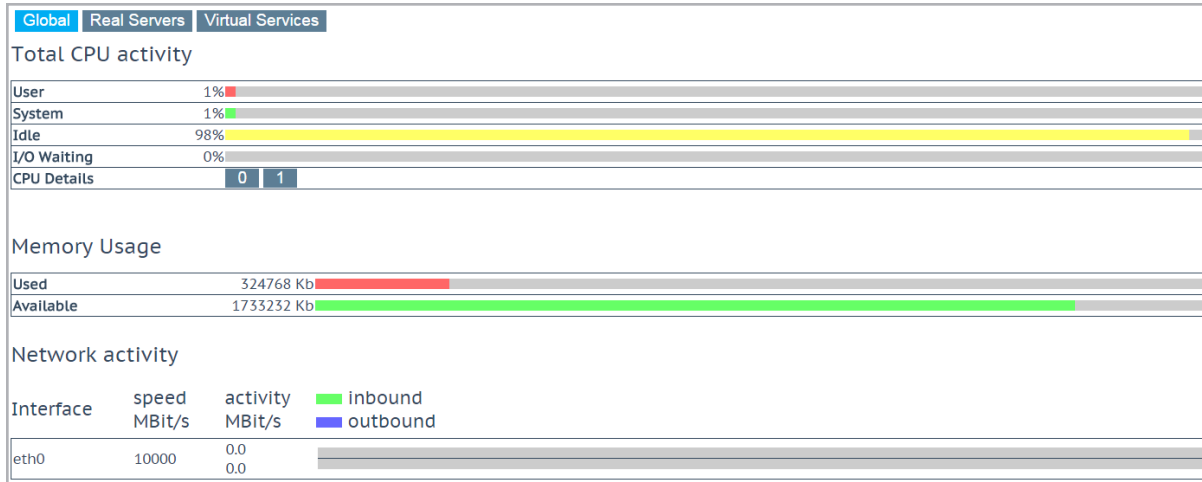

3. Click the **Virtual Services** button.

| Global Real Servers Virtual Services | | | | | | | | | | | Connections | Bytes | Bits |
|--------------------------------------|--------------------|----------|--------|-------------|-------------|--------|---------|--------|--------------|----------------------|--------------------|-------------|------|
| Name | Virtual IP Address | Protocol | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/s | Real Servers RS-IP | [%] Conns/s | |
| 1 RD Web Access | 10.154.11.51:443 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.2 | 0 | |
| | | | | | | | | | | | 10.154.201.3 | 0 | |
| 2 RD Gateway | 10.154.11.52:443 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.2 | 0 | |
| | | | | | | | | | | | 10.154.201.3 | 0 | |
| 3 RD Connection Broker | 10.154.11.52:3389 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.4 | 0 | |
| | | | | | | | | | | | 10.154.201.5 | 0 | |
| 4 RDP Gateway UDP | 10.154.11.52:3391 | udp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.2:443 | 0 | |
| | | | | | | | | | | | 10.154.201.3:443 | 0 | |
| 5 RD Session Host | 10.154.11.53:3389 | tcp | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10.154.201.6 | 0 | |
| | | | | | | | | | | | 10.154.201.7 | 0 | |
| 5 System Total Conns | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0/sec | | | |

This overview shows the active sessions, sessions over the last hour, in addition to how many requests each Real Server handled.

4. Open another web browser on a different client and perform steps 1 and 2 above.

| Global Real Servers Virtual Services | | | | | | | | | | | Connections | Bytes | Bits | Packets |
|--------------------------------------|--------------|--------|-------------|-------------|--------|---------|--------|--------------|------------------------|-----|-------------|-------|------|---------|
| Name | RS-IP | Status | Total Conns | Last 60 Sec | 5 Mins | 30 Mins | 1 Hour | Active Conns | Current Rate Conns/sec | [%] | Conns/sec | | | |
| 1→ | 10.154.201.2 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 2→ | 10.154.201.3 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 3→ | 10.154.201.4 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 4→ | 10.154.201.5 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 5→ | 10.154.201.6 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 6→ | 10.154.201.7 | Up | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| 6 System Total Conns | | | 0 | 0 | 0 | 0 | 0 | 0 | 0/sec | | | | | |

5. Refresh the LoadMaster statistics page. Notice that, based on the load balancing method we chose, load is spread over both RD Session Host servers.

3 Troubleshooting

Refer to the sections below for details on some common issues seen when load balancing the RDP workload.

3.1 Connections Rejected

Windows Server 2012 and 2012 R2 have security requirements on IIS. Therefore, when RDP traffic is reencrypted from the LoadMaster, the server thinks it is a “Man in the Middle” attack and rejects the connection. The following Microsoft article describes this behavior:

<https://support.microsoft.com/en-us/kb/973917>

There are a few ways to work around this issue:

- Use the same SSL certificate on the LoadMaster and on the RD Gateway server.
- Configure the RD Gateway server to expect offload and accept connections on port 80 with no encryption. Configure the LoadMaster to offload (with no reencryption).
- Configure IIS as per the Microsoft article: <https://support.microsoft.com/en-us/kb/973917> with the following changes:

```
- appcmd.exe set config "Default Web Site" -  
  section:system.webServer/security/authentication/windowsAuthentication  
  /enabled:"True" /commit:apphost  
  
- appcmd.exe set config "Default Web Site" -  
  section:system.webServer/security/authentication/windowsAuthentication  
  /extendedProtection.tokenChecking:"Allow" /extendedProtection.flags:"Proxy"  
  /commit:apphost  
  
- appcmd.exe set config "Default Web Site" -  
  section:system.webServer/security/authentication/windowsAuthentication  
  /+"extendedProtection.[name='HTTP/rdgateway.contoso.com']" /commit:apphost
```

3.2 Load Not Balanced

There is a nine character limit in RDP sessions from Microsoft. Therefore, if an RDP session comes in using the domain first, the LoadMaster persists that client to a server without balancing the load.

This behavior is as a result of the routing token character limitation and is not caused by the LoadMaster.

Refer to the following Microsoft article for instructions on how to specify custom routing tokens:

[IMsRdpClientAdvancedSettings::LoadBalanceInfo property](#)

References

Some resources on Microsoft RDS 2012 (R2) are listed below:

[What's New in Remote Desktop Services for Windows Server 2012 R2?](#)

[Remote Desktop Services – Upgrade and Migration Guidelines for Windows Server 2012 R2](#)

[Load Balancing Remote Desktop Services Web Access & Gateway with Kemp LoadMaster for Azure](#)

[Deploying and Configuring RD Gateway in Windows Server 2012](#)

[Deploying and Configuring RD Web Access in Windows Server 2012](#)

[Deploying and Configuring RD Connection Broker High Availability in Windows Server 2012](#)

[RD Connection Broker Database Explained](#)

[Distribution of Remote Apps and Desktops in Windows Server 2012](#)

[Publishing RemoteApps in Windows Server 2012](#)

[Microsoft Remote Desktop Clients](#)

A useful, related Kemp document is listed below:

SSL Accelerated Services, Feature Description on the [Kemp Documentation page](#)

Last Updated Date

This document was last updated on 27 July 2023.