



# LoadMaster Duo Integration Guide

## Technical Note

UPDATED: 30 July 2023

**© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.**

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS\_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

# Table of Contents


---

<b>1 LoadMaster Duo Two Factor Authentication .....</b>	<b>4</b>
1.1 Add an Application to Duo .....	5
1.1.1 Install Duo Auth Proxy on Linux .....	5
1.1.2 Create an Application in Duo .....	6
1.1.3 Configure Duo Auth Proxy and Start .....	7
1.1.3.1 Add a Firewall Rule to Allow Inbound RADIUS .....	7
1.1.3.2 Start Duo Auth Proxy .....	7
1.1.4 Configure the LoadMaster .....	9
1.2 Create the Duo Image Set .....	11
1.2.1 Modify lm_initial_dfa.html .....	11
1.2.2 Modify lm_sso.js .....	13
1.2.3 Add the Image Name to the Manifest .....	13
<b>2 References .....</b>	<b>21</b>
<b>Last Updated Date .....</b>	<b>22</b>

# 1 LoadMaster Duo Two Factor Authentication

In this guide we will configure Duo Push along with username and password validation through Active Directory to implement a two factor authentication for our sample application. In this example, the authentication used with the application server is Kerberos Constrained Delegation (KCD).

Once configured the user flow for accessing the application will look like this:

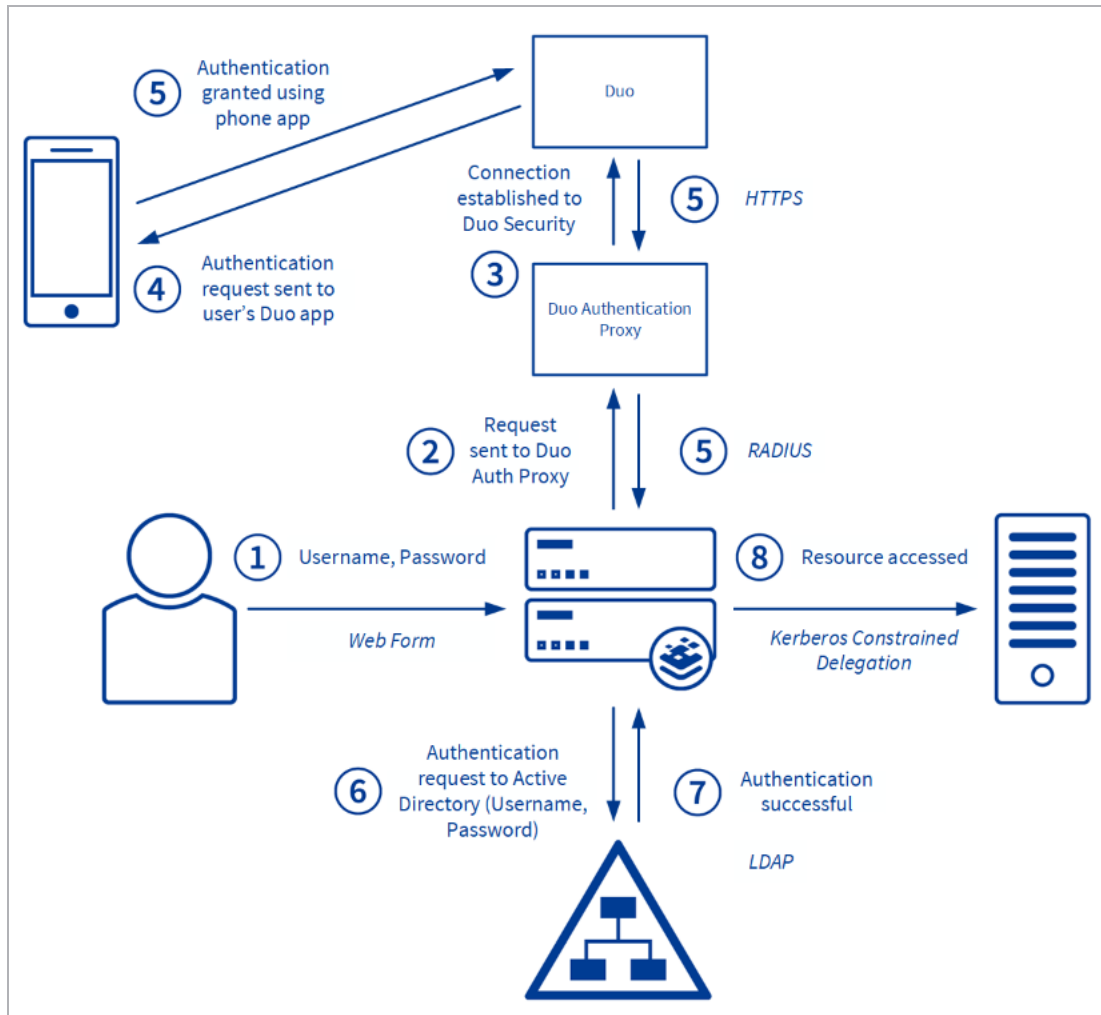

## 1 LoadMaster Duo Two Factor Authentication

The flow is outlined below:

1. The user provides their username and password.
2. The LoadMaster queries the Duo RADIUS proxy for the user.
3. A connection to Duo Security is established.
4. An authentication request is sent to the user's Duo app.
5. The user validates the request on the app.
6. The LoadMaster performs pre-authentication using the supplied username and password with the Local Domain Controller.
7. Authentication is successful.
8. The resource is accessed through Kerberos Constrained Delegation.

### 1.1 Add an Application to Duo

First you must log in to the Duo Admin Panel and navigate to **Applications > Protect an application**. Click **RADIUS**. Then, follow the remaining steps in the sub-sections below.

#### 1.1.1 Install Duo Auth Proxy on Linux

The following Duo guide outlines the steps on installing Duo Authentication Proxy: [Authentication Proxy - Reference](#).

Below is an example configuration using CentOS with Wget installed:

```
yum install gcc make libffi-devel perl zlib-devel
wget https://dl.duosecurity.com/duoauthproxy-latest-src.tgz
tar xzf duoauthproxy-latest-src.tgz
cd duoauthproxy-5.1.1-7484191-src/
make
cd duoauthproxy-build/
./install
```

At this point step through the prompts, for example:

In what directory do you wish to install the Duo Authentication Proxy?

[/opt/duoauthproxy]

Enter the name of a user account under which the Authentication Proxy should be run. we recommend a non-privileged and locked down account.

Or you can press <Enter> and our default locked down user will be created for you:

## 1 LoadMaster Duo Two Factor Authentication


[duo\_authproxy\_svc]

Enter the name of a group under which the Authentication Proxy logs will be readable. Or press <Enter> and a default group will be created for you:

[duo\_authproxy\_grp]


### 1.1.2 Create an Application in Duo

To create an application in Duo, follow these steps:

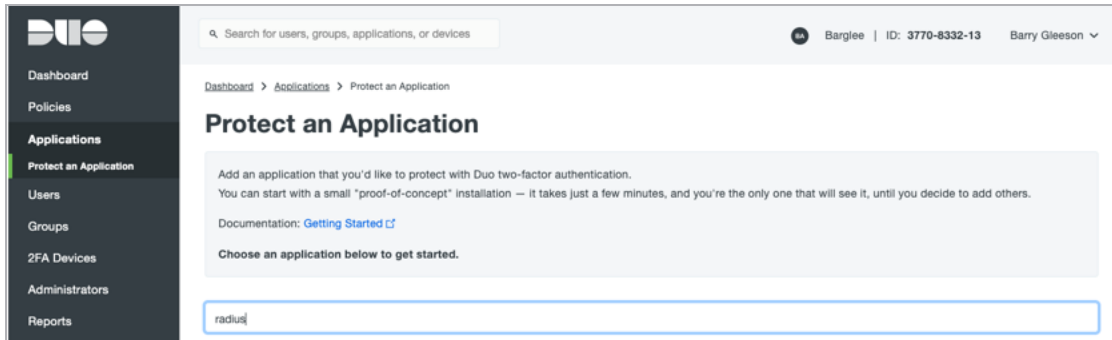

1. Log in to Duo and go to **Dashboard > Applications > Protect an Application** and search for **radius**.

2. Set the app Name and Users that can access the app.

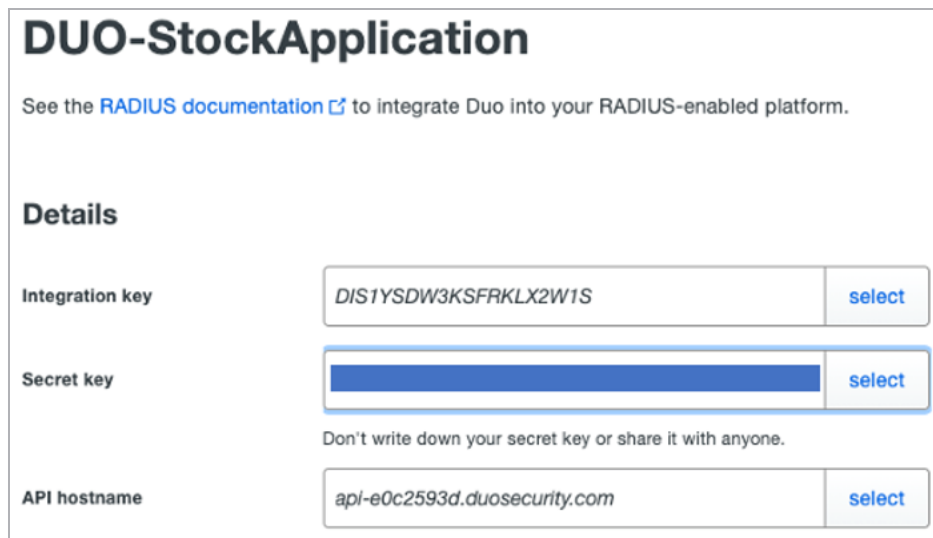

3. Copy the values for:

- **Integration key**
- **Secret key**

## 1 LoadMaster Duo Two Factor Authentication

### - API hostname

#### 1.1.3 Configure Duo Auth Proxy and Start

To configure the Duo auth proxy, you must modify the **authproxy.cfg** file. For example:

```
vi /opt/duoauthproxy/conf/authproxy.cfg
```

Below is an example configuration containing the details copied above in addition to the IP address of the LoadMaster which is the RADIUS Client (**radius\_ip\_1**) and the RADIUS password to use (**radius\_secret\_1**).

In our case we are only doing one validation step with Duo so use:

```
client= duo_only_client
```

```
[main]
test_connectivity_on_startup=true
[duo_only_client]
[radius_server_auto]
ikey=DIS1YSDW3KSFRKLX2W1S
skey=eEqgB1BUP7dfasdasdasdhAPDZOSwLVLP
api_host=api-e0c2593d.duosecurity.com
radius_ip_1=10.1.151.61
radius_secret_1=duoradius
client=duo_only_client
port=1812
```

##### 1.1.3.1 Add a Firewall Rule to Allow Inbound RADIUS

This may vary across Linux OSS:

```
firewall-cmd --add-service=radius --permanent
sudo firewall-cmd --reload
```

##### 1.1.3.2 Start Duo Auth Proxy

Whenever changes are made the configuration you must stop and start the process.

```
[root@localhost log]# /opt/duoauthproxy/bin/authproxycctl start
```

Running The Duo Authentication Proxy Connectivity Tool. This may take several minutes...

```
[info] Testing section 'main' with configuration:
[info] {'test_connectivity_on_startup': 'true'}
[info] There are no configuration problems
[info] -----
```

## 1 LoadMaster Duo Two Factor Authentication

```
[info] Testing section 'duo_only_client' with configuration:
[info] {}
[info] There are no configuration problems
[info] -----
[info] Testing section 'radius_server_auto' with configuration:
[info] {'api_host': 'api-e0c2593d.duosecurity.com',
'client': 'duo_only_client',
'key': 'DIS1YSDW3KSFRKLX2W1S',
'port': '1812',
'radius_ip_1': '10.1.151.61',
'radius_secret_1': '*****',
'skey': '*****[40]'}
[info] There are no configuration problems
[info] -----
[info] Testing section 'main' with configuration:
[info] {'test_connectivity_on_startup': 'true'}
[info] There are no connectivity problems with the section.
[info] -----
[info] Testing section 'duo_only_client' with configuration:
[info] {}
[info] No testing to be done for section.
[info] -----
[info] Testing section 'radius_server_auto' with configuration:
[info] {'api_host': 'api-e0c2593d.duosecurity.com',
'client': 'duo_only_client',
'key': 'DIS1YSDW3KSFRKLX2W1S',
'port': '1812',
'radius_ip_1': '10.1.151.61',
'radius_secret_1': '*****',
'skey': '*****[40]'}
[info] The RADIUS Server has no connectivity problems.
[info] -----
[info] SUMMARY
[info] No issues detected
The results have also been logged in /opt/duoauthproxy/log/connectivity_tool.log
Checking updates for Duo Authentication Proxy...
[info] No updates detected. Your Duo Authentication Proxy is up to date.
```



## 1 LoadMaster Duo Two Factor Authentication

### 1.1.4 Configure the LoadMaster

Create an SSO domain using LDAP and RADIUS. To do this, follow the steps below:

1. In the LoadMaster User Interface (UI), go to **Certificates & Security > LDAP Configuration**.
2. Specify the name of the LDAP endpoint configuration and click **Add**.

LDAP Endpoint 10.1.151.250

LDAP Server(s)	<input type="text" value="10.1.151.250"/>	<a href="#">Set LDAP Server(s)</a>
LDAP Protocol	<input type="text" value="Unencrypted"/>	
Validation Interval	<input type="text" value="60"/>	<a href="#">Set Interval</a>
Referral Count	<input type="text" value="0"/>	<a href="#">Set Referral Count</a>
Server Timeout	<input type="text" value="5"/>	<a href="#">Set Timeout</a>
Admin User	<input type="text" value="administrator@exampl"/>	<a href="#">Set Admin User</a>
Admin User Password	<input type="password" value="....."/>	<a href="#">Set Admin User Password</a>

3. Configure the settings of the LDAP endpoint as needed.
4. In the LoadMaster UI, go to **Virtual Services > Manage SSO**.

Client Side Single Sign On Configurations

Add new Client Side Configuration

[Add](#)

5. Enter the name of the SSO configuration in the text box under **Add new Client Side Configuration** and click **Add**.

## 1 LoadMaster Duo Two Factor Authentication

Domain LDAPDUO

Authentication Protocol
RADIUS and LDAP

LDAP Endpoint
10.1.151.250
Manage LDAP Configuration

RADIUS Server(s)
10.1.151.250
Set RADIUS Server(s)

RADIUS Shared Secret
Set Shared Secret

Send NAS Identifier

Domain/Realm
example.com
Set Domain/Realm Name

Logon Format (Phase 1 RADIUS)
Principalname

Logon Format (Phase 2 LDAP)
Principalname

Logon Transcode
Disabled

Failed Login Attempts
0
Set Failed Login Attempts

Public - Untrusted Environment
Private - Trusted Environment

Session Timeout
900
Set Idle Time
900
Set Idle Time

1800
Set Max Duration
28800
Set Max Duration

Use for Session Timeout:
idle time


Use LDAP Endpoint for Healthcheck

Test User
Set Test User

Test User Password
Set Test User Password

6. Select **RADIUS and LDAP** as the **Authentication Protocol**.
7. Select the relevant **LDAP Endpoint**.
8. Configure the other settings as needed.
9. In the LoadMaster UI, go to **Virtual Services > View/Modify Services**.
10. Click **Modify** on the relevant Virtual Service (or add a new one).
11. Expand the **ESP Options** section.

## 1 LoadMaster Duo Two Factor Authentication

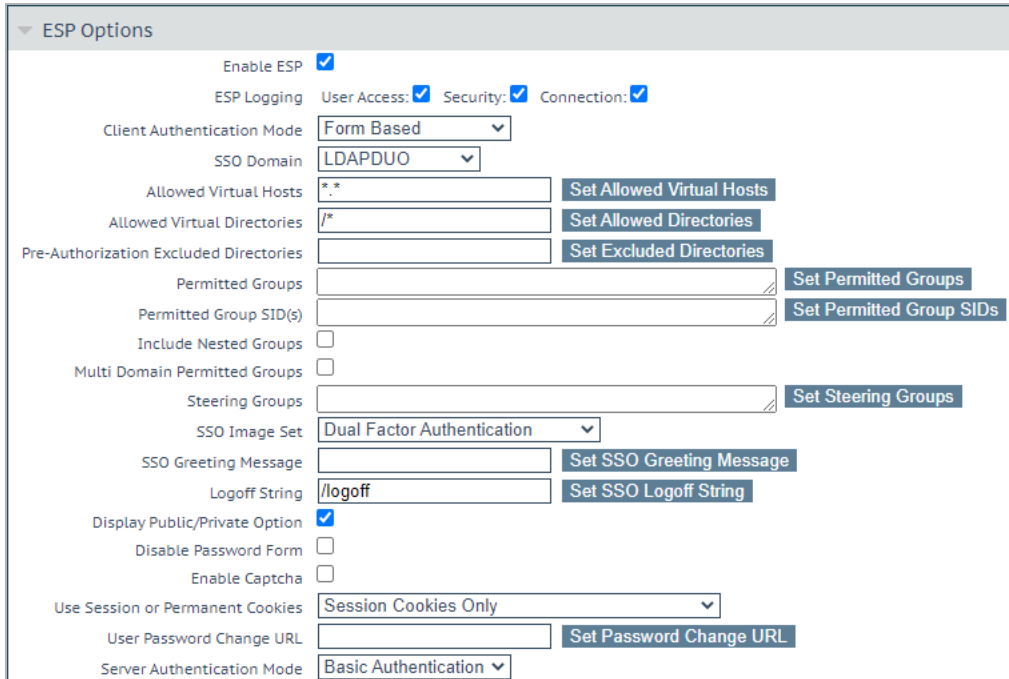

12. Select the **Enable ESP** check box.
13. Select the relevant **SSO Domain**.
14. Configure any other settings as needed.

## 1.2 Create the Duo Image Set

In this example the dual factor custom image set is updated to include an image prompt for the user to authorize access using the app. You can customize this to use your chosen image. In this example, the custom image form is modified to include just one Username and one Password input field and an image is added to indicate to the user that they must approve access in response to the initiated Duo push. The image being displayed in this example is **PhoneApprove.png** and must be added to the custom image set manifest directory (as described in the **Add the Image Name to the Manifest** section). For details on how to modify a custom image set, refer to the following document: [Custom Authentication Form Technical Note](#).

### 1.2.1 Modify `lm_initial_dfa.html`

Modify the `lm_initial_dfa.html` file to add the following HTML:

```
<script type="text/javascript">
```

```
function picture(){
```

## 1 LoadMaster Duo Two Factor Authentication

```

var pic = "/lm_auth_proxy?LMimage=PhoneApprove.png"
document.getElementById('bigpic').src = pic.replace('90x90', '225x225');
document.getElementById('bigpic').style.display='block';

}

</script>

<script>
function hidebutton(button){
button.style.visibility = "hidden";
}

</script>

```

Change Submit Action:

**Before**

```

<form action="/lm_auth_proxy?LMLogon" method="post" id="logonForm" autocomplete="off"
onSubmit="return save_usernames_dfa(this.dusername, this.username, this.pubpriv);">

```

**After**

```

<form action="/lm_auth_proxy?LMLogon" method="post" id="logonForm" autocomplete="off"
onSubmit="return save_usernames_dfa(this.dusername, this.dusername, this.pubpriv);">

```

**Before**

```

<tr id="remotecredsid">
<td class="nowrap"><label for="remotecreds"><b>Remote Credentials</b></label></td>
</tr>
<tr id="dpasscodeid">
<td class="nowrap"><label for="dpasscode">Passcode:</label></td>
<tr id="dpasscodeid style="display:none;">

```

**Before**

```

<input class="txt" id="dpasscode" type="password" name="dpasscode" autocomplete=off
required maxlength=128 />

```

**After**

```

<input class="txt" id="dpasscode" value="xxx" type="hidden" name="dpasscode"
autocomplete=off maxlength=128 />

```

## 1 LoadMaster Duo Two Factor Authentication

### Before

```
<tr id="interncredsid">
<td class="nowrap"><label for="interncreds"><b>Internal Credentials</b></label></td>
</tr>
<tr id="userid">
<td class="nowrap"><label for="username">Internal Username:</label></td>
```

### After

```
<tr id="userid" style="display:none">
<td class="nowrap"><label for="username">Ignore Username:</label></td>
```

### Before

```
<input type="submit" value="Log On" name="submit" />
```

### After

```
<input type="submit" value="Log On" onclick="hidebutton(this);picture();" name="submit" />
<tr id="interncredsid">
<td class="nowrap" align="center" colspan="2"><label for="interncreds"><b></b></label></td>
</tr>
```

### 1.2.2 Modify lm\_sso.js

Replace all references to **username** with **dusername**.

### 1.2.3 Add the Image Name to the Manifest

Add the image used to the manifest and include in the imageset/Duo directory, for example, **PhoneApprove.png**.

**Within the <head> portion of the page, add the following JavaScript to enable dynamic display of the Duo image and hiding of the button once credentials are entered.**

Add:

```
<script type="text/javascript">
function picture(){
var pic = "/lm_auth_proxy?LMimage=PhoneApprove.png"
document.getElementById('bigpic').src = pic.replace('90x90', '225x225');
document.getElementById('bigpic').style.display='block';
}
```

## 1 LoadMaster Duo Two Factor Authentication

```
</script>
<script>
function hidebutton(button){
button.style.visibility = "hidden";
}
</script>
```

**Remove the use of two separate usernames. This enables the same username to be used for both Duo (RADIUS) and LDAP queries.**

Replace:

```
<form action="/lm_auth_proxy?LMLogon" method="post" id="logonForm" autocomplete="off"
onSubmit="return save_usernames_dfa(this.dusername, this.username, this.pubpriv);">
```

With:

```
<form action="/lm_auth_proxy?LMLogon" method="post" id="logonForm" autocomplete="off"
onSubmit="return save_usernames_dfa(this.dusername, this.dusername, this.pubpriv);">
```

**Remove the following section because there is no need for separate remote credentials:**

```
<tr id="remotecredsid">
<td class="nowrap"><label for="remotecreds"><b>Remote Credentials</b></label></td>
</tr>
```

**Remove the first password field from view.**

Replace:

```
<tr id="dpasscodeid">
<td class="nowrap"><label for="dpasscode">Passcode:</label></td>
```

With:

```
<tr id="dpasscodeid" style="display:none;">
```

**Update the RADIUS password to have a pre-populated value which in this case is not used because the RADIUS query requires the username only to trigger the push notification.**

Replace:

```
<input class="txt" id="dpasscode" type="password" name="dpasscode" autocomplete=off
required maxlength=128 />
```

With:

```
<input class="txt" id="dpasscode" value="xxx" type="hidden" name="dpasscode"
autocomplete=off maxlength=128 />
```

**Remove the second username field:**

## 1 LoadMaster Duo Two Factor Authentication

```
<tr id="interncredsid">
<td class="nowrap"><label for="interncreds"><b>Internal Credentials</b></label></td>
</tr>
```

**Remove the displaying of the internal username because we will reuse a single username.**

Replace:

```
<tr id="userid">
<td class="nowrap"><label for="username">Internal Username:</label></td>
```

With:

```
<tr id="userid" style="display:none"><td class="nowrap"><label for="username">Ignore
Username:</label></td>
```

**Update the internal password field to simply be called password.**

Replace:

```
<td class="nowrap"><label for="password">Internal Password:</label></td>
```

With:

```
<td class="nowrap"><label for="password">Password:</label></td>
```

**On submit, ensure the Duo image is displayed.**

Replace:

```
<input type="submit" value="Log On" name="submit" />
```

With:

```
<input type="submit" value="Log On" onclick="hidebutton(this);picture();" name="submit"
/>
```

Below is the updated file completed:

```
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; CHARSET=utf-8">
<title>Kemp Login Screen</title>
<meta content="NOINDEX, NOFOLLOW" name="Robots">
<link rel="shortcut icon" href="/lm_auth_proxy?LMimage=favicon.ico" type="image/x-icon">
<link href="/lm_auth_proxy?LMimage=kmgstyle.css" type="text/css" rel="stylesheet">
<style type="text/css">
body
{
```

## 1 LoadMaster Duo Two Factor Authentication

```
font-family:Tahoma,Arial,Helvetica;
font-size:70%;
}
input, button
{
font-family:Tahoma,Arial,Helvetica;
}
.mid
{
font-size:70%;
}
input, button, label, table
{
font-size:100%;
}
</style>
<script>
var xx_msg10 = "Login Failed - The security service has blocked your request. Please
contact your System Administrator.<br><br>";
var xx_msg11 = "Login Failed - Please make sure that both your remote and internal
credentials are correct, and then try again.<br><br>";
</script>
<script type="text/javascript" src="/lm_auth_proxy?LMimage=lm_sso.js"></script>
<script type="text/javascript">
function picture(){
var pic = "/lm_auth_proxy?LMimage=PhoneApprove.png"
document.getElementById('bigpic').src = pic.replace('90x90', '225x225');
document.getElementById('bigpic').style.display='block';
}

</script>
<script>
function hidebutton(button){
button.style.visibility = "hidden";
}
</script>
</head>
```



## 1 LoadMaster Duo Two Factor Authentication

```

<body style="font-size:100%" onload='sso_setup("%s", "%s", "%s", %s, %s, %s);'>
<noscript>
<div id="dvErr">
<table cellpadding="0" cellspacing="0">
<tr>
<td></td>
<td style="width:100%">To use LoadMaster ESP Login, javascript must be enabled in your
browser.</td>
</tr>
</table>
</div>
</noscript>
<form action="/lm_auth_proxy?LMLogon" method="post" id="logonForm" autocomplete="off"
onSubmit="return save_usernames_dfa(this.dusername, this.dusername, this.pubpriv);">
<input type="hidden" id="curl" name="curl" value="">
<input type="hidden" id="curlid" name="curlid" value="">
<input type="hidden" id="curlmode" name="curlmode" value="0">
<table align="center" id="tblMain" cellpadding=0 cellspacing=0>
<tr>
<td colspan=3>
<table cellspacing=0 cellpadding=0 class="tblLgn">
<tr><td></td>
</tr>
</table>
</td>
</tr>
<tr>
<td>
<td id="mdLft">&nbsp;  </td>
<td id="mdMid">
<table class="mid">
<tbody>
<tr>
<td class="align">
<table cellpadding="0" cellspacing="0">
<tr><td id="ssomsg"></td></tr>
</table>
</td>

```

## 1 LoadMaster Duo Two Factor Authentication

```

</tr>
<tr id="reset_pass" style="display:none">
<td class="align">
<table cellpadding="0" cellspacing="0">
<tr><td>
<span style="display:none" id="expired_msg">Your password has expired.</span>
<span style="display:none" id="exp_p_msg">Password will expire in </span>
<span style="display:none" id="exp_p_num"></span>
<span style="display:none" id="exp_p_num_plur"> days</span>
<span style="display:none" id="exp_p_num_sing"> day</span>
<span id="reset_msg">&nbsp;</span>&nbsp;</span>&nbsp;</td></tr>
</table>
</td>
</tr>
<tr>
<td class="align">
<table cellpadding="0" cellspacing="0">
<tr><td class="wrng" id="badmsg"></td></tr>
</table>
</td>
</tr>
<tr>
<td>
<table cellspacing="0" cellpadding="0">
<colgroup>
<col class="nowrap">
<col class="w100">
</colgroup>
<tbody>
<tr id="nopub"><td class="nowrap">
<input type="radio" id="pubr" name="pubpriv" value=0 checked="checked">
</td><td class="align"><label for="pubr">This is a public or shared computer</label></td>
</tr>
<tr id="nopub1"><td class="nowrap">
<input type="radio" id="pubp" name="pubpriv" value=1>

```

## 1 LoadMaster Duo Two Factor Authentication

```

</td><td class="align"><label for="pubp">This is a private computer</label></td>
</tr>
<tr id="duserid">
<td class="nowrap"><label for="username">Username:</label></td>
<td class="txtpad">
<input class="txt" id="username" name="username" type="text"/>
</td>
</tr>
<tr id="dpasscodeid" style="display:none;">
<td class="txtpad">
<input class="txt" id="dpasscode" value="xxx" type="hidden" name="dpasscode"
autocomplete=off maxlength=128 />
</td>
</tr>

<tr id="userid" style="display:none">
<td class="nowrap"><label for="username">Ignore Username:</label></td>
<td class="txtpad">
<input class="txt" id="username" name="username" type="text"/>
</td>
</tr>
<tr id="passid">
<td class="nowrap"><label for="password">Password:</label></td>
<td class="txtpad">
<input class="txt" id="password" type="password" name="password" autocomplete=off
required maxlength=128 />
</td>
</tr>

<tr>
<td class="nowrap">&nbsp;</td>
<td class="txtpad" colspan="2">
<input type="submit" value="Log On" onclick="hidebutton(this);picture();" name="submit"
/>
</td>
</tr>
<tr id="interncredsid">

```

## 1 LoadMaster Duo Two Factor Authentication

```

<td class="nowrap" align="center" colspan="2"><label for="interncreds"><b></b></label></td>
</tr>
</tbody>
</table>
</td>
</tr>
</tbody>
</table>
<div class="g-recaptcha" id=captchabox style="display:none" data-sitekey=""></div>
<table class="mid tblConn">
<tr>
<td class="tdConn" style="padding-top:0px;">Secured by Kemp LoadMaster</td>
</tr>
<tr>
<td style="font-size:80%;">&copy; 2002-2020 Kemp Technologies Inc. All rights
reserved.</td>
</tr>
</table>
</td>
<td id="mdRt">&nbsp;</td>
</tr>
<tr>
<td colspan=3>
<table cellpadding=0 cellspacing=0 class="tblLgn">
<tr>
<td></td>
</tr></table>
</td>
</tr>
</tbody>
</table>
</form>
</body>
</html>

```

## 2 References

For further details, refer to the following Duo document: [Authentication Proxy - Reference](#).

# Last Updated Date

This document was last updated on 30 July 2023.