



Clouddian HyperStore

Deployment Guide

UPDATED: 29 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Intended Audience	4
1.2 Document Purpose	4
2 Template	5
3 Cloudian HyperStore	6
4 LoadMaster Global Settings	8
4.1 Enable Subnet Originating Requests Globally	8
5 LoadMaster Virtual Services	9
5.1 Create a Virtual Service using a Template	9
5.2 Cloudian S3 Virtual Services	10
5.2.1 S3 HTTP Virtual Service Recommended API Settings (optional)	10
5.2.2 S3 HTTPS Virtual Service Recommended API Settings (optional)	11
5.2.3 S3 Admin Virtual Service Recommended API Settings (optional)	11
5.3 Cloudian IAM Virtual Services	12
5.3.1 IAM HTTP Virtual Service Recommended API Settings (optional)	12
5.3.2 IAM HTTPS Virtual Service Recommended API Settings (optional)	12
5.4 Cloudian Management Console (CMC) Virtual Services	13
5.4.1 CMC Virtual Service Recommended API Settings (optional)	13
6 Troubleshooting - Connections Rejected	14
7 References	15
Last Updated Date	16

1 Introduction

Cloudian HyperStore is a software-defined, flexible, expandable native file and object storage solution. In combination with a Kemp load balancer, a Cloudian solution can provide high availability and enhanced performance for object storage using the S3 protocol.

1.1 Intended Audience

Anyone interested in configuring the Kemp LoadMaster to load balance Cloudian HyperStore.

1.2 Document Purpose

This deployment guide provides instructions on how to configure the Kemp LoadMaster to load balance Cloudian HyperStore services using Kemp application templates. This guide should only be used as a reference for the load balancing configuration of Cloudian services because each environment is unique and may have different requirements. This guide outlines the load balancing configuration using S3 standard ports (80 and 443) in the Kemp application templates, but custom ports can also be leveraged based on the environment.

2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. For some workloads, additional manual steps may be required such as assigning a certificate or applying port following, these steps are covered in the document, if needed.

You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.


3 Cloudian HyperStore

Cloudian HyperStore is a software-defined object storage solution for large archives, media, and web data storage. Policy-driven data management allows Cloudian to move data seamlessly between on-premises, edge, and public cloud storage to optimize availability, protection, performance, and cost.

The following table provides a list of the Cloudian default ports and protocols used for accessing the storage.

Cloudian Protocol	Transport Protocol	Port
S3	HTTP	80
	HTTPS	443
IAM	HTTP	16080
	HTTPS	16443
S3 Admin	HTTPS	19443
CMC	HTTPS	8443,8888

3 Cloudian HyperStore

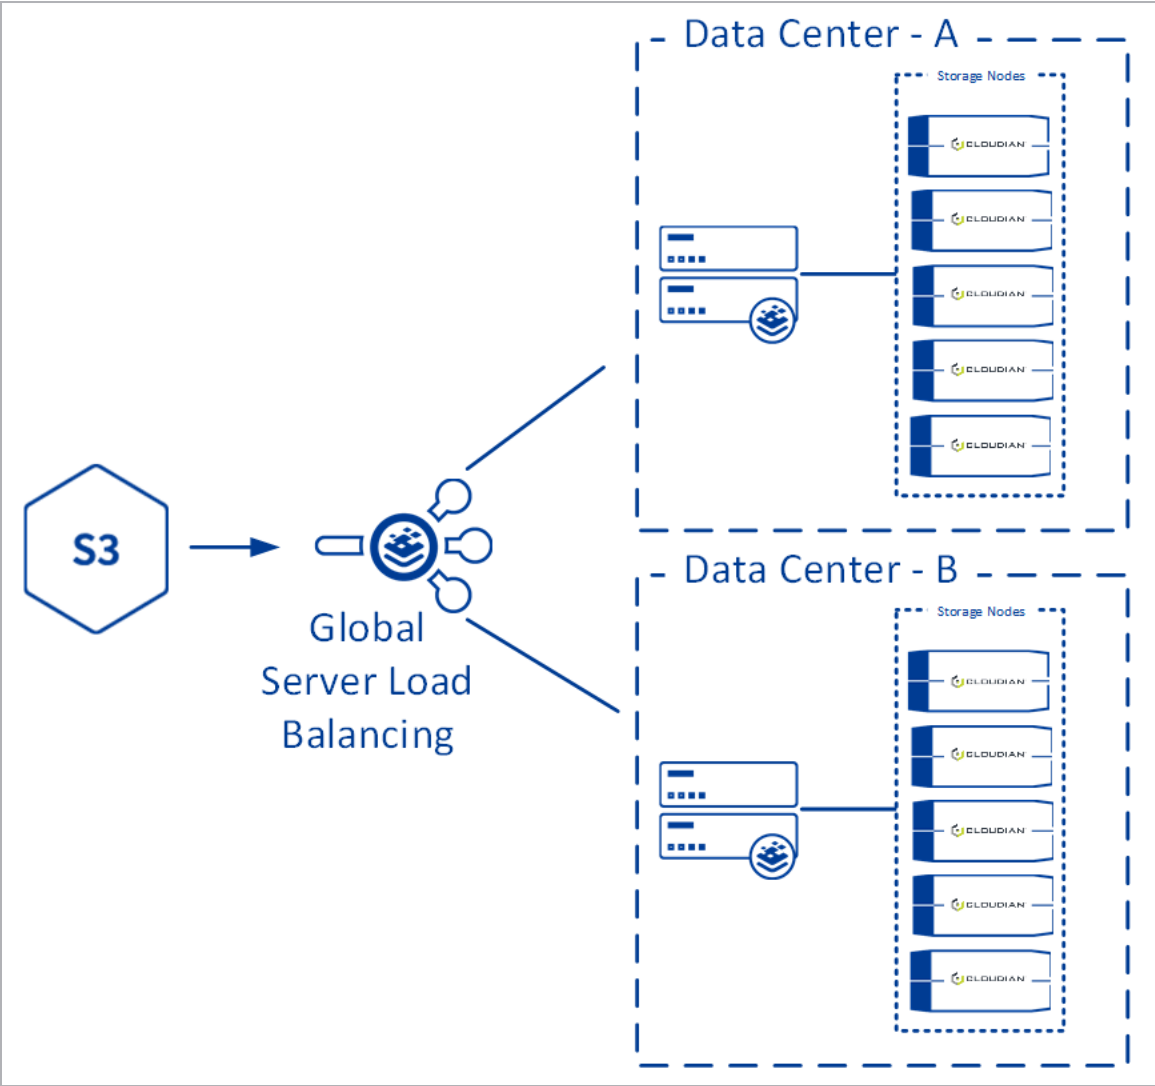

4 LoadMaster Global Settings


Before setting up the Virtual Services, the following global settings should be configured to support the workload.

4.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.

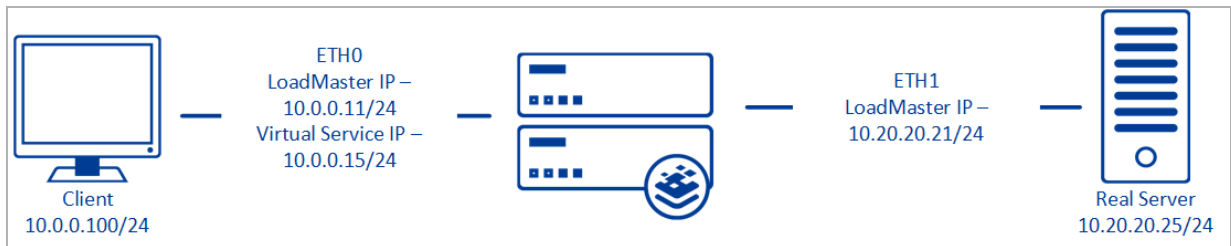

When **Subnet Originating Requests** is enabled, the Real Server sees traffic originating from 10.20.20.21 (LoadMaster eth1 address) and responds correctly in most scenarios.

With **Subnet Originating Requests** disabled, the Real Server sees traffic originating from 10.0.0.15 (LoadMaster Virtual Service address on **eth0**) and responds to **eth0** which could cause asymmetric routing.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster User Interface (UI), go to **System Configuration > Miscellaneous Options > Network Options**.
2. Select the **Subnet Originating Requests** check box.

5 LoadMaster Virtual Services

This step-by-step setup of Virtual Services leverages the Kemp application template for Cloudian.

The table in each section outlines the settings configured by the application template. You can use this information to manually configure Virtual Services or using the Kemp LoadMaster Application Programming Interface (API) and automation tools.

There are four services that can be published through the LoadMaster:

- **S3:** Provides connections from the application/client to the storage. There are two methods available; encrypted or non-encrypted.
- **S3 Admin:** S3 service that extends the API allowing administrators to generate reports and manage users and groups.
- **IAM:** Cloudian HyperStore provides support for the Amazon Web Services (AWS) Identity Access Management (IAM) API.
- **Cloudian Management Console (CMC):** Web-based user interface for Cloudian HyperStore administrators.

5.1 Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster UI, go to **Virtual Services > Add New**.
2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. S3 Admin Only – Update **Custom Header** with the Base64 string (refer to the **Cloudian S3 Virtual Services** section for further information).
7. Click **Add New**.
8. Type the **Real Server Address**.
9. Confirm that the correct port is entered.

10. Click **Add This Real Server**.

11. Add additional Real Servers.

5.2 Cloudian S3 Virtual Services

The following section outlines the Layer 7 configuration options for using S3 with Cloudian. For advanced health checking, an encrypted Base64 string which includes the **username** and **password** is used. To encode the Base64 String, one of the following approaches can be used:

PowerShell:

```
PS> [Convert]::ToBase64String([System.Text.Encoding]::UTF8.GetBytes('sysadmin:public'))
```

Linux:

```
$ echo -n 'sysadmin:public' | base64
```

or

```
$ echo -n 'sysadmin:public' | openssl base64
```

5.2.1 S3 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
VType	http
SubnetOriginating	1
Schedule	lc
CheckType	http
CheckPort	80
CheckUrl	/.healthcheck

5.2.2 S3 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	https
CheckPort	443
CheckUrl	/.healthcheck

5.2.3 S3 Admin Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	19443
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	https
CheckPort	19443
CheckUrl	/.healthcheck
CheckHeaders	Authorize:Replace-with-Base64-String

5.3 Cloudian IAM Virtual Services

The following section outlines the Layer 7 configuration options for using Identity and Access Management (IAM) with Cloudian.

5.3.1 IAM HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	16080
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	tcp
CheckPort	16080

5.3.2 IAM HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	16443
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	tcp
CheckPort	16443

5.4 Cloudian Management Console (CMC) Virtual Services

The following section outlines the Layer 7 configuration options for using CMC.

5.4.1 CMC Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	8443
prot	tcp
VStype	http
SubnetOriginating	1
ExtraPorts	8888
Persist	src
PersistTimeout	1800
Schedule	lc
CheckType	https
CheckPort	8443
CheckURL	/cloudian/login.htm

6 Troubleshooting - Connections Rejected

When using a non-default TCP port or offloading for Cloudian services, you must ensure the Real Server port is correct. This is a common mistake when configuring the Real Servers when the Virtual Services port is different from the Real Server port. See the table in the **Cloudian HyperStore** section of this document for the required Real Server ports for Cloudian.

7 References

Some resources on Cloudian are available here: [Cloudian Solutions](#).

Useful, related Kemp documents are listed below:

[Transparency Feature Description](#)

[RESTful API Interface Description](#)

Last Updated Date

This document was last updated on 29 July 2023.