



Kemp LBaaS Driver for Mirantis OpenStack

Installation Guide

UPDATED: 29 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
2 Kemp LBaaS Mirantis OpenStack Driver	5
2.1 Prerequisites	5
2.2 Install the Kemp LBaaS Mirantis OpenStack Driver Package	5
2.2.1 Enable LBaaS in Mirantis OpenStack	6
2.2.2 Automatically Install the Driver Package	6
2.2.3 Manually Install the Driver Package	6
2.2.4 Enable LBaaS Neutron with the Kemp LoadMaster Driver	7
2.3 Topology Setup	8
2.4 Updating the Driver Package	9
Last Updated Date	10

1 Introduction

Mirantis OpenStack is a cloud computing software platform. It is primarily deployed as an Infrastructure as a Service (IaaS) solution. The technology consists of a series of interrelated projects that control pools of processing, storage and networking resources throughout a data center. This can be managed through a web-based dashboard, command-line tools or a RESTful API.

Mirantis OpenStack lets users deploy Virtual Machines and other instances that handle different tasks for managing a cloud environment on the fly. With Mirantis OpenStack, horizontal scaling is easy – more instances can be spun up in order to serve more users, as needed.

The Kemp Load Balancer as a Service (LBaaS) OpenStack driver allows the Kemp LoadMaster to be deployed in Mirantis OpenStack.

1.1 Document Purpose

This document explains how to install the Kemp LBaaS driver in Mirantis OpenStack and how to deploy a LoadMaster instance in Mirantis OpenStack.

1.2 Intended Audience

This document is for anyone who is interested in finding out how to install and use the Kemp LBaaS Mirantis OpenStack driver.

2 Kemp LBaaS Mirantis OpenStack Driver


For instructions on how to install and use the Kemp LBaaS OpenStack driver, refer to the sections below.

2.1 Prerequisites

The following prerequisites must be in place before following these steps:

- Mirantis OpenStack 8.0 (Liberty release) must be deployed.
- A LoadMaster must be deployed within OpenStack.
- Some of the commands in this document may require sudo or root access.
- The Application Program Interface (API) must be enabled on the LoadMaster. For instructions on how to do this, refer to the steps below:

a) In the LoadMaster Web User Interface (WUI), go to **Certificates & Security > Remote Access**.

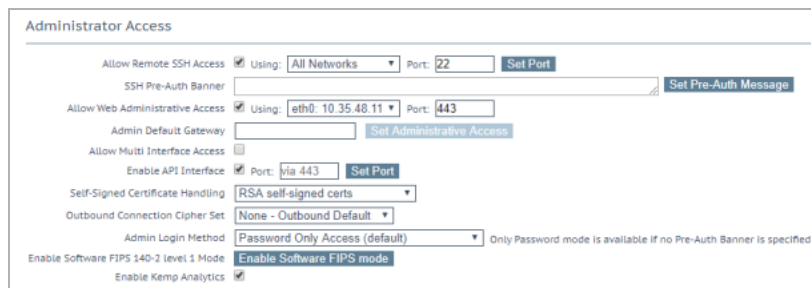

The screenshot shows the 'Administrator Access' configuration page in the LoadMaster WUI. The page has a light blue header and a white body. It contains several sections with checkboxes and input fields. The 'Enable API Interface' checkbox is checked, and the 'Set Port' button is visible next to it. Other settings include 'Allow Remote SSH Access' (checked), 'SSH Pre-Auth Banner' (empty), 'Allow Web Administrative Access' (checked), 'Admin Default Gateway' (empty), 'Allow Multi Interface Access' (unchecked), 'Self-Signed Certificate Handling' (RSA self-signed certs), 'Outbound Connection Cipher Set' (None - Outbound Default), 'Admin Login Method' (Password Only Access (default)), 'Enable Software FIPS 140-2 level 1 Mode' (checked), and 'Enable Kemp Analytics' (checked).

b) Select the **Enable API Interface** check box.

2.2 Install the Kemp LBaaS Mirantis OpenStack Driver Package

The package can either be installed automatically (if a network connection is in place) or manually. Refer to the relevant section below for further information.

2.2.1 Enable LBaaS in Mirantis OpenStack

To enable LBaaS, open the Mirantis Command Line Interface (CLI) and follow the steps below:

1. Edit the **local_settings.py** file:

```
vim /etc/openstack-dashboard/local_settings.py
```

2. Find the following block of code:

```
OPENSTACK_NEUTRON_NETWORK = {  
  
'enable_lb': False }
```

3. Change **False** to **True**:

```
OPENSTACK_NEUTRON_NETWORK = {  
  
'enable_lb': True }
```

True is case sensitive and the case should be exactly as it is in this document.

4. Save the file.
5. Restart the web server:

```
service apache2 restart
```

2.2.2 Automatically Install the Driver Package

To automatically install the driver package, open the Mirantis Command Line Interface (CLI) and enter the following command:

```
pip install <NameOfKempOpenStackDriver>
```

For example:

```
pip install kemptech-openstack-lbaas
```

2.2.3 Manually Install the Driver Package

To manually install the driver package, follow the steps below:

1. Go to the following link: <https://pypi.python.org/pypi/kemptech-openstack-lbaas/>.
2. Download the .tar.gz file provided.
3. Extract the .tar.gz file.

4. In the Mirantis CLI, find the relevant Python path by running the following commands:

```
python
import sys
sys.path
```

The default path is usually **/usr/lib/python2.7/dist-packages**.

5. Copy the downloaded **kemptech_openstack_lbaas** folder into the **dist-packages** folder.

If updating the Kemp driver package, overwrite the existing files.

2.2.4 Enable LBaaS Neutron with the Kemp LoadMaster Driver

Configure the **neutron.conf** and **neutron_lbaas.conf** files to use the Kemp LBaaS plugin. To do this, follow the steps below:

1. Edit the **neutron.conf** configuration file:

```
vim /etc/neutron/neutron.conf
```

2. Find the **service_plugins** line and add **neutron_lbaas.services.loadbalancer.plugin.LoadBalancerPluginv2**, for example:

```
service_plugins = neutron.services.l3_router.l3_router_
plugin.L3RouterPlugin,neutron.services.metering.metering_
plugin.MeteringPlugin,neutron_
lbaas.services.loadbalancer.plugin.LoadBalancerPluginv2
```

A comma (,) is used to separate different service plugins.

3. At the bottom of the file, add the following:

```
[kemptechnologies]
lm_address = <LoadMasterIPAddress>
lm_username = <LoadMasterUsername>
lm_password = <LoadMasterPassword>
```

For example:

```
[kemptechnologies]
```

```
lm_address = 172.16.2.129
```

```
lm_username = bal
```

```
lm_password = test1234
```

4. Save the changes made to the edited file.

5. Edit the **neutron_lbaas.conf** configuration file:

```
vim /etc/neutron/neutron_lbaas.conf
```

6. Save the changes made to the edited file.

7. Go down to the **[service_providers]** section and add (or append, as needed) the following line:

```
service_provider = LOADBALANCERV2:kemptechnologies:neutron_  
lbaas.drivers.kemptechnologies.driver_v2.KempLoadMasterDriver:default
```

This is case sensitive.

If there are other LBaaS entries in the list, ensure the Kemp one is set as the default.

8. Restart Neutron by running the following command:

```
service neutron-server restart
```

2.3 Topology Setup

Refer to the commands below to find out how to create a load balancer, listener, pool, members and health monitor:

- Get the Universally Unique Identifier (UUID) of the private subnet:

```
neutron subnet-list
```

- Create a load balancer:

```
neutron lbaas-loadbalancer-create --name lb1 private-subnet
```

- Create a listener (health check):

```
neutron lbaas-listener-create --loadbalancer lb1 --protocol HTTP --protocol-port 80 --  
name listener1
```


- Create a pool and associate it with the previously created listener:

```
neutron lbaas-pool-create --lb-algorithm ROUND_ROBIN --listener listener1 --protocol HTTP --name pool1
```

- Create members (Real Servers):

```
neutron lbaas-member-create --subnet private-subnet --address <ServerIPAddress> --protocol-port 80 pool1
```

- Create a health monitor and associate it with the pool:

```
neutron lbaas-healthmonitor-create --delay 3 --type HTTP --max-retries 3 --timeout 3 --pool pool1
```

2.4 Updating the Driver Package

To update the driver package, refer to the relevant point below:

- **Automatic:** Run the following command in the Mirantis CLI:

```
pip install -U <NameOfKempOpenStackDriver>
```

For example:

```
pip install --upgrade kemptech-openstack-lbaas
```

- **Manual:** To manually update the driver package, follow the steps in the **Manually Install the Driver Package** section but overwrite the existing files.

Last Updated Date

This document was last updated on 29 July 2023.