

# BMC Remedy

## Deployment Guide

UPDATED: 27 July 2023

**© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.**

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# Table of Contents

**1 Introduction** ..... **4**

1.1 Document Purpose ..... 4

1.2 Intended Audience ..... 4

**2 Template** ..... **5**

**3 Architecture** ..... **6**

**4 Configure the LoadMaster** ..... **7**

4.1 Enable Subnet Originating Requests Globally ..... 7

4.2 Enable Check Persist Globally ..... 8

**5 Virtual Services** ..... **9**

5.1 Create the BMC Remedy AR Server Virtual Service ..... 9

5.1.1 BMC Remedy AR Server Virtual Service Recommended API Settings (optional) ..... 10

5.2 Create the BMC Remedy Mid Tier HTTP Virtual Services ..... 10

5.2.1 BMC Remedy Mid Tier HTTP Virtual Service Recommended API Settings (optional) ..... 11

5.3 Create the BMC Remedy Mid Tier HTTPS Offloaded Virtual Services ..... 12

5.3.1 BMC Remedy Mid Tier HTTPS Offloaded Virtual Service Recommended API Settings (optional) ..... 13

5.4 Create the BMC Remedy Mid Tier HTTPS Reencrypt Virtual Services ..... 14

5.4.1 BMC Remedy Mid Tier HTTPS Reencrypt Virtual Service Recommended API Settings (optional) ..... 15

**Last Updated Date** ..... **16**



© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# 1 Introduction

BMC Remedy is an IT Service Management suite providing effective collaboration, visibility, and reporting. BMC Remedy components such as Smart IT provides a single interface to create multiple ticket types such as incidents, work orders, change requests, or service requests.

The Kemp LoadMaster delivers an exceptional, cost effective, and easy to use solution which by employing High Availability, Global Server Load Balancing (GSLB), intelligent load balancing, and intelligent server health checking can support BMC Remedy's always-on application experience initiative.

## 1.1 Document Purpose

This document provides the recommended LoadMaster settings used when load balancing BMC Remedy. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined. The Kemp Support site can be found at: https://support.kemptechnologies.com.

## 1.2 Intended Audience

This document is intended to be read by anyone who is interested in configuring the LoadMaster to optimize BMC Remedy.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# 2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. For some workloads, additional manual steps may be required such as assigning a certificate or applying port following. These steps are covered in the document, if needed.

You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.


Download released templates from the following page: LoadMaster Templates.

For more information and steps on how to import and use templates, refer to the Virtual Services and Templates, Feature Description on the Kemp Documentation page.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# 3 Architecture

BMC Remedy consists of two back end server types that can be load balanced, AR servers, and Mid Tier servers.

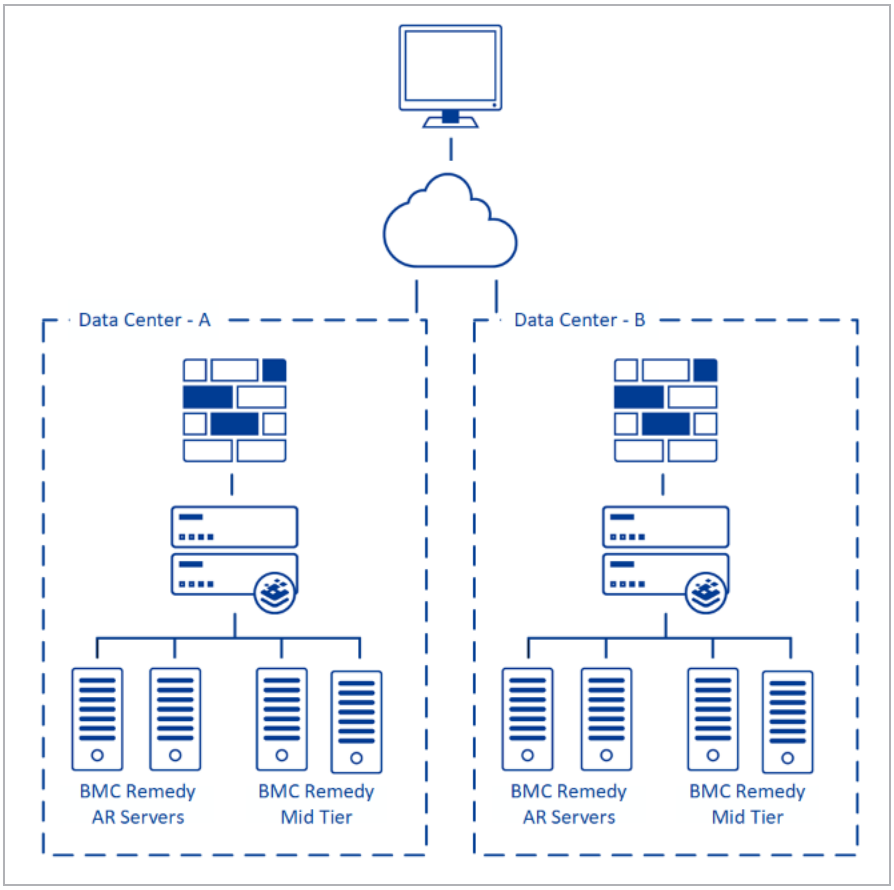



© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# 4 Configure the LoadMaster

Refer to the sections below for details on some recommended global settings.

## 4.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.




When **Subnet Originating Requests** is enabled, the Real Server sees traffic originating from 10.20.20.21 (LoadMaster eth1 address) and responds correctly in most scenarios.

With **Subnet Originating Requests** disabled, the Real Server sees traffic originating from 10.0.0.15 (LoadMaster Virtual Service address on **eth0**) and responds to **eth0** which could cause asymmetric routing.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster User Interface (UI), go to **System Configuration > Miscellaneous Options > Network Options**.
2. Select the **Subnet Originating Requests** check box.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

## 4.2 Enable Check Persist Globally

It is recommended that you change the **Always Check Persist** option to **Yes – Accept Changes**. Use the following steps:

1. Go to **System Configuration > Miscellaneous Options > L7 Configuration**.
2. Click the **Always Check Persist** drop-down arrow and select **Yes – Accept Changes**.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# 5 Virtual Services

BMC Remedy consists of several components that can be load balanced and optimized depending on the environment in which it is deployed. BMC Remedy AR Server, Mid Tier, or both can leverage the Kemp LoadMaster to provide the necessary high availability and failover to ensure an always-on application experience.

This step-by-step setup of Virtual Services (VSs) leverages the Kemp application template for BMC Remedy.


The table in each section outlines the settings configured by the application template. You can use this information to manually configure Virtual Services or use the Kemp LoadMaster Application Programming Interface (API) and automation tools.

SSL/TLS certificates should be added before creating this Virtual Service. For further information on certificates, refer to the SSL Accelerated Services Feature Description.

## 5.1 Create the BMC Remedy AR Server Virtual Service

The following are the steps involved and the recommended settings to configure the BMC Remedy AR Server Virtual Service:

1. In the main menu of the LoadMaster User Interface (UI), go to **Virtual Services > Add New**.

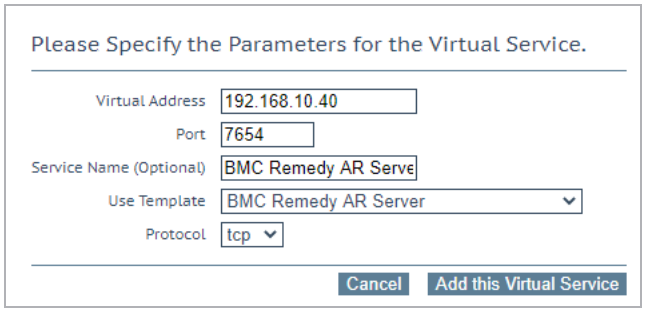


2. Type a valid **Virtual Address**.

3. Select the **BMC Remedy AR Server** template in the **Use Template** drop-down list.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

> The BMC Remedy AR Server template uses tcp port 7654. This port can be changed to match the port used in the environment.

4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.
7. Type the **Real Server Address**.
8. Confirm that the port entered is the correct TCP port configured in the BMC Remedy environment.
9. Click **Add This Real Server**.
10. Repeat these steps to add more Real Servers as needed.

### 5.1.1 BMC Remedy AR Server Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.


| API Parameter | API Value |
|---|---|
| port | 7654 |
| prot | tcp |
| VStype | gen |
| SubnetOriginating | 1 |
| Forcel7 | 1 |
| Schedule | lc |
| Persist | none |
| CheckType | tcp |

## 5.2 Create the BMC Remedy Mid Tier HTTP Virtual Services

The following are the steps involved and the recommended settings to configure the BMC Remedy Mid Tier Virtual Service:


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

1. In the main menu of the LoadMaster UI, go to **Virtual Services > Add New**.

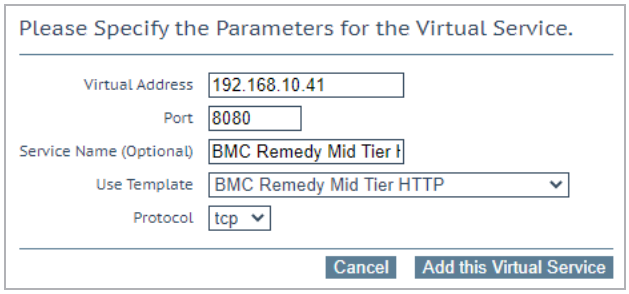


2. Type a valid **Virtual Address**.
3. Select the **BMC Remedy Mid Tier HTTP** template in the **Use Template** drop-down list.

> The BMC Remedy Mid Tier HTTP template uses the default tcp port 8080. This port can be changed to match the port used in the environment.

4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.
7. Type the **Real Server Address**.
8. Confirm that the port entered is the correct TCP port configured in the BMC Remedy environment.
9. Click **Add This Real Server**.
10. Repeat these steps to add more Real Servers as needed.

### 5.2.1 BMC Remedy Mid Tier HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

| API Parameter | API Value |
|---|---|
| port | 8080 |
| prot | tcp |
| VStype | http |



© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

| API Parameter | API Value |
|---|---|
| SubnetOriginating | 1 |
| Forcel7 | 1 |
| Schedule | lc |
| Persist | src |
| PersistTimeout | 360 |
| CheckType | http |
| CheckUseGet | 1 |

## 5.3 Create the BMC Remedy Mid Tier HTTPS Offloaded Virtual Services

The following are the steps involved and the recommended settings to configure the BMC Remedy Mid Tier Virtual Service:

1. In the main menu of the LoadMaster UI, go to **Virtual Services > Add New**.

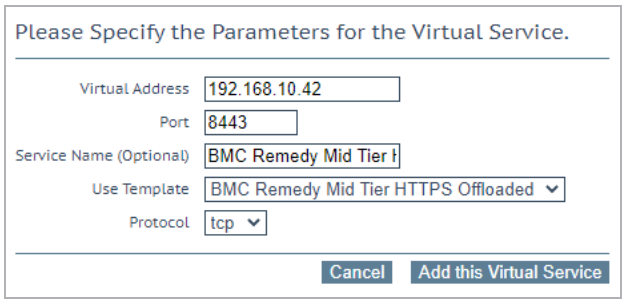


2. Type a valid **Virtual Address**.

3. Select the **BMC Remedy Mid Tier HTTPS Offloaded** template in the **Use Template** drop-down list.

> The BMC Remedy Mid Tier HTTPS Offloaded template uses the default tcp port 8443. This port can be changed to match the port used in the environment.

4. Click **Add this Virtual Service**.

5. Expand the **SSL Properties** section.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

6. Select the certificate to use from **Available Certificates** and click the arrow (**>**) to move it to **Assigned Certificates**.

7. Expand the **Real Servers** section.

8. Click **Add New**.

9. Type the **Real Server Address**.

10. Confirm that the port entered is the correct tcp port configured in the BMC Remedy environment.

11. Click **Add This Real Server**.

12. Repeat these steps to add more Real Servers as needed.

### 5.3.1 BMC Remedy Mid Tier HTTPS Offloaded Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

| API Parameter | API Value |
|---|---|
| port | 8443 |
| prot | tcp |
| VStype | http |
| SubnetOriginating | 1 |
| Forcel7 | 1 |
| Schedule | lc |
| Persist | src |
| PersistTimeout | 360 |
| SSLAcceleration | 1 |
| SSLReencrypt | 0 |
| TLSType | 3 |
| CipherSet | BestPractices |
| CheckType | http |



© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

| API Parameter | API Value |
|---|---|
| Checkport | 8080 |
| CheckUseGet | 1 |

## 5.4 Create the BMC Remedy Mid Tier HTTPS Reencrypt Virtual Services

The following are the steps involved and the recommended settings to configure the BMC Remedy Mid Tier Virtual Service:

1. In the main menu of the LoadMaster UI, go to **Virtual Services > Add New**.

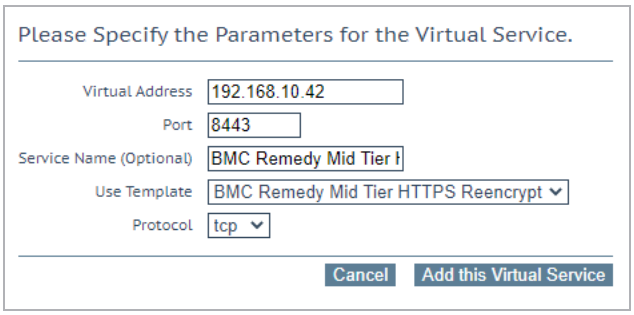


2. Type a valid **Virtual Address**.

3. Select the **BMC Remedy Mid Tier HTTPS Re-encrypt** template in the **Use Template** drop-down list.

> The BMC Remedy Mid Tier HTTP Reencrypt template uses the default TCP port 8443. This port can be changed to match the port used in the environment.

4. Click **Add this Virtual Service**.

5. Expand the **SSL Properties** section.

6. Select the certificate to use from **Available Certificates** and click the arrow (**>**) to move it to **Assigned Certificates**.

7. Expand the **Real Servers** section.

8. Click **Add New**.

9. Type the **Real Server Address**.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

10. Confirm that the port entered is the correct tcp port configured in the BMC Remedy environment.
11. Click **Add This Real Server**.
12. Repeat these steps to add more Real Servers as needed.

### 5.4.1 BMC Remedy Mid Tier HTTPS Reencrypt Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

| API Parameter | API Value |
|---|---|
| port | 8443 |
| prot | tcp |
| VStype | http |
| SubnetOriginating | 1 |
| Forcel7 | 1 |
| Schedule | lc |
| Persist | src |
| PersistTimeout | 360 |
| SSLAcceleration | 1 |
| SSLReencrypt | 1 |
| TLSType | 3 |
| CipherSet | BestPractices |
| CheckType | https |
| CheckUseGet | 1 |


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

# Last Updated Date

This document was last updated on 27 July 2023.


© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.