Progress®
Kemp® LoadMaster®

Deployment Guide Cloudian HyperStore

Generated on: 12 January 2026

Copyright

Visit the following page online to see Progress Software Corporation's current Product Documentation Copyright Notice/Trademark Legend: Product Documentation Copyright Notice & Trademarks | Progress

Table of Contents

Chapter 1: Introduction 5

Intended Audience 5

Document Purpose 5

Chapter 2: Template 6

Chapter 3: Cloudian HyperStore 8

Chapter 4: LoadMaster Global Settings 10

Enable Subnet Originating Requests Globally 10

Chapter 5: LoadMaster Virtual Services 12

Create a Virtual Service using a Template 13

Cloudian S3 Virtual Services 13

S3 HTTP Virtual Service Recommended API Settings (optional) 14

S3 HTTPS Virtual Service Recommended API Settings (optional) 14

S3 Admin Virtual Service Recommended API Settings (optional) 15

Cloudian IAM Virtual Services 15

IAM HTTP Virtual Service Recommended API Settings (optional) 16

IAM HTTPS Virtual Service Recommended API Settings (optional) 16

Cloudian Management Console (CMC) Virtual Services 17

CMC Virtual Service Recommended API Settings (optional) 17

Chapter 6: Troubleshooting - Connections Rejected 18

Chapter 7: References 19

1

Introduction

Cloudian HyperStore is a software-defined, flexible, expandable native file and object storage solution. In combination with a Progress Kemp load balancer, a Cloudian solution can provide high availability and enhanced performance for object storage using the S3 protocol.

Contents

- Intended Audience
- Document Purpose

Intended Audience

Anyone interested in configuring the LoadMaster to load balance Cloudian HyperStore.

Document Purpose

This deployment guide provides instructions on how to configure the LoadMaster to load balance Cloudian HyperStore services using Progress Kemp application templates. This guide should only be used as a reference for the load balancing configuration of Cloudian services because each environment is unique and may have different requirements. This guide outlines the load balancing configuration using S3 standard ports (80 and 443) in the Progress Kemp application templates, but custom ports can also be leveraged based on the environment.

2

Template

Progress Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. For some workloads, additional manual steps may be required such as assigning a certificate or applying port following. These steps are covered in the document, if needed.


You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: LoadMaster Templates.

You can import templates to the LoadMaster through the **Manage Templates** page under **Virtual Services** in the main menu of the LoadMaster User Interface (UI).

Click **Choose File**, select the template to install and click **Add New Template**. The template will then be available to select when you are adding a new Virtual Service.

To begin the process of creating a new Virtual Service, click **Virtual Services** and **Add New** in the main menu.

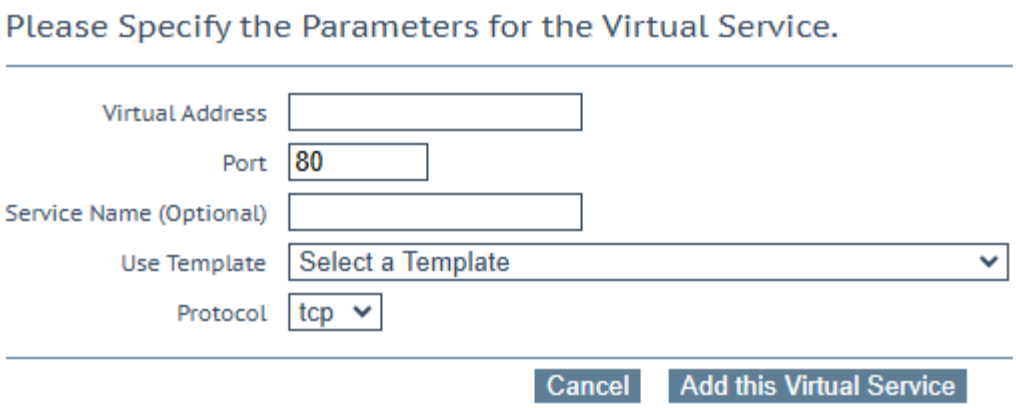

This opens the Virtual Service parameters page which prompts to enter the Virtual IP (VIP) address of the Virtual Service, the port, and the name to give the service and the protocol. You can select a previously-imported template in the **Use Template** drop-down list.

For more information and steps on how to use templates, refer to the Virtual Services and Templates, Feature Description.


3

Cloudian HyperStore

Cloudian HyperStore is a software-defined object storage solution for large archives, media, and web data storage. Policy-driven data management allows Cloudian to move data seamlessly between on-premises, edge, and public cloud storage to optimize availability, protection, performance, and cost.

The following table provides a list of the Cloudian default ports and protocols used for accessing the storage.

Cloudian Protocol	Transport Protocol	Port
S3	HTTP	80
	HTTPS	443
IAM	HTTP	16080
	HTTPS	16443
S3 Admin	HTTPS	19443
CMC	HTTPS	8443,8888

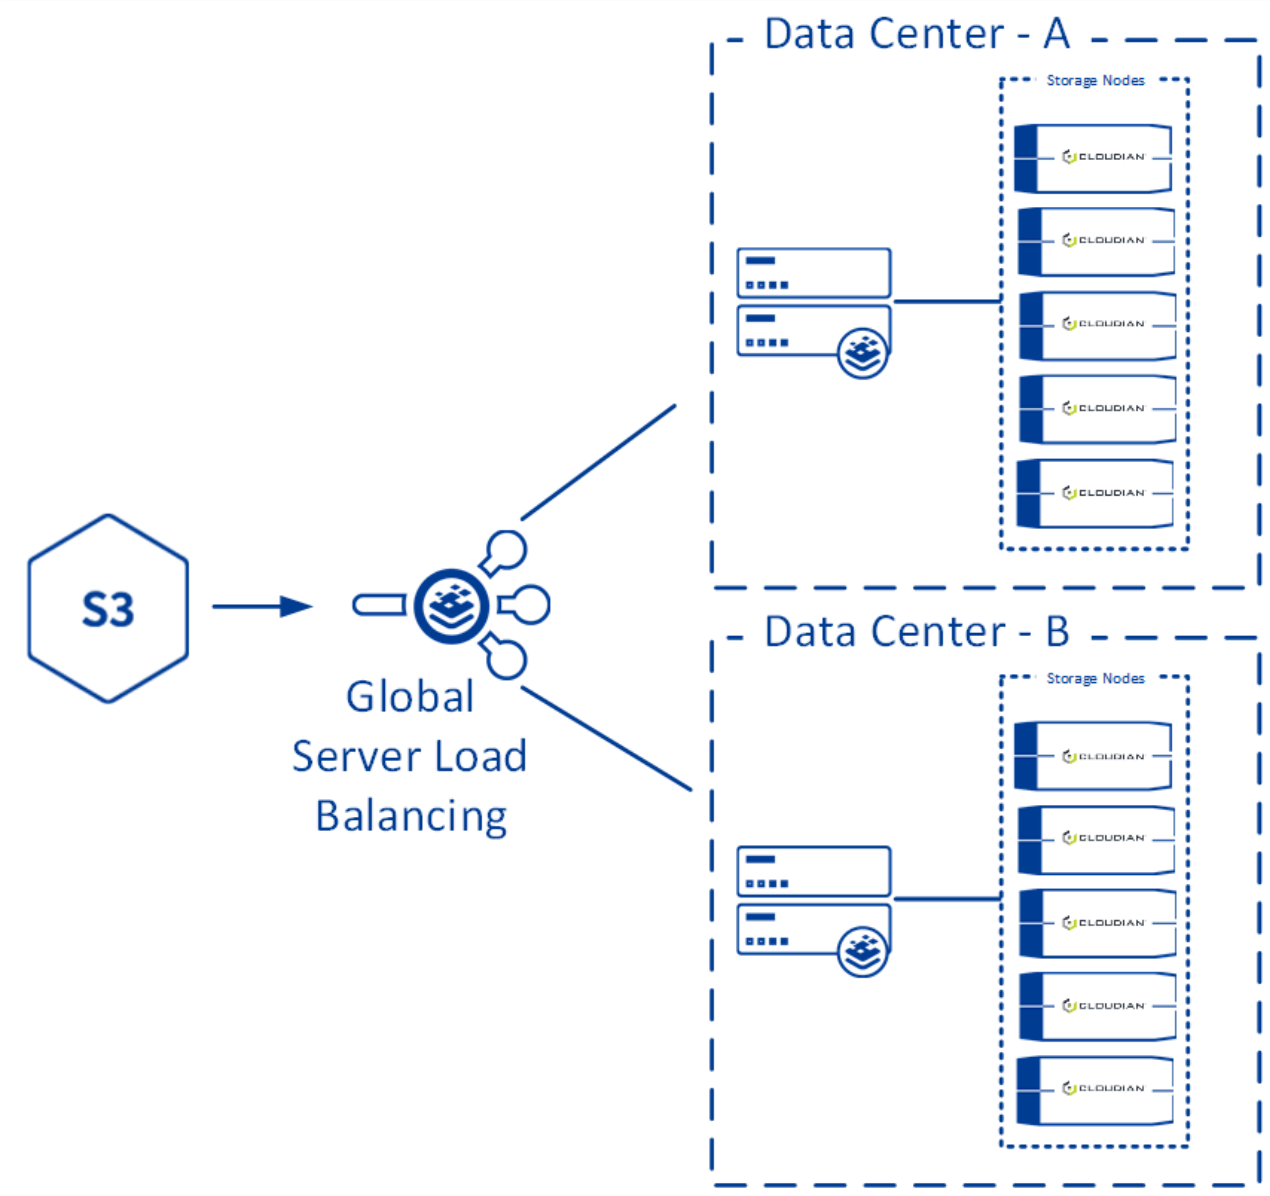
Data Center - A
Storage Nodes
CLOUDIAN
CLOUDIAN
CLOUDIAN
CLOUDIAN
CLOUDIAN
S3
Global
Server Load
Balancing
Data Center - B
Storage Nodes
CLOUDIAN
CLOUDIAN
CLOUDIAN
CLOUDIAN
CLOUDIAN

4

LoadMaster Global Settings

Before setting up the Virtual Services, the following global settings should be configured to support the workload.

Contents

- Enable Subnet Originating Requests Globally

Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.



When **Subnet Originating Requests** is enabled, the Real Server sees traffic originating from 10.20.20.21 (LoadMaster eth1 address) and responds correctly in most scenarios.

With **Subnet Originating Requests** disabled, the Real Server sees traffic originating from 10.0.0.15 (LoadMaster Virtual Service address on **eth0**) and responds to **eth0** which could cause asymmetric routing.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster User Interface (UI), go to **System Configuration > Miscellaneous Options > Network Options**.
2. Select the **Subnet Originating Requests** check box.

5

LoadMaster Virtual Services

This step-by-step setup of Virtual Services leverages the Progress Kemp application template for Cloudian.

The table in each section outlines the settings configured by the application template. You can use this information to manually configure Virtual Services or using the LoadMaster Application Programming Interface (API) and automation tools.

There are four services that can be published through the LoadMaster:

- **S3:** Provides connections from the application/client to the storage. There are two methods available; encrypted or non-encrypted.
- **S3 Admin:** S3 service that extends the API allowing administrators to generate reports and manage users and groups.
- **IAM:** Cloudian HyperStore provides support for the Amazon Web Services (AWS) Identity Access Management (IAM) API.
- **Cloudian Management Console (CMC):** Web-based user interface for Cloudian HyperStore administrators.

Contents

- Create a Virtual Service using a Template
- Cloudian S3 Virtual Services
- Cloudian IAM Virtual Services
- Cloudian Management Console (CMC) Virtual Services

Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster UI, go to **Virtual Services > Add New**.
2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. S3 Admin Only – Update **Custom Header** with the Base64 string (refer to the Cloudian S3 Virtual Services section for further information).
7. Click **Add New**.
8. Type the **Real Server Address**.
9. Confirm that the correct port is entered.
10. Click **Add This Real Server**.
11. Add additional Real Servers.

Cloudian S3 Virtual Services

The S3 Admin API service requires an Admin Authentication password as a Base64 string (part of health check) that needs to be added manually to the second textbox of the **Custom Header** field in the Real Servers section. This can be easily retrieved by running the following command from a HyperStore appliance:

```
$ hsctl config get admin.auth
```



If the above **hsctl** command does not exist, run the following command instead:

```
$ grep admin_auth_pass /etc/cloudian-*-puppet/manifests/extdata/common.csv
```



Take the last value from the delimited text from above and use it in the following command:

```
$ echo -n "sysadmin:<InsertDelimitedText>" | base64
```



Contents

- S3 HTTP Virtual Service Recommended API Settings (optional)
- S3 HTTPS Virtual Service Recommended API Settings (optional)
- S3 Admin Virtual Service Recommended API Settings (optional)

S3 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	http
CheckPort	80
CheckUrl	/.healthCheck

S3 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp

API Parameter	API Value
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	https
CheckPort	443
CheckUrl	/.healthCheck

S3 Admin Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	19443
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	https
CheckPort	19443
CheckUrl	/.healthCheck
CheckHeaders	Authorization:Basic (Enter-Base64-String)

Cloudian IAM Virtual Services

The following section outlines the Layer 7 configuration options for using Identity and Access Management (IAM) with Cloudian.

Contents

- IAM HTTP Virtual Service Recommended API Settings (optional)

- IAM HTTPS Virtual Service Recommended API Settings (optional)

IAM HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	16080
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	tcp
CheckPort	16080

IAM HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	16443
prot	tcp
VStype	http
SubnetOriginating	1
Schedule	lc
CheckType	tcp
CheckPort	16443

Cloudian Management Console (CMC) Virtual Services

The following section outlines the Layer 7 configuration options for using CMC.

Contents

- CMC Virtual Service Recommended API Settings (optional)

CMC Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	8443
prot	tcp
VStype	http
SubnetOriginating	1
ExtraPorts	8888
Persist	src
PersistTimeout	1800
Schedule	lc
CheckType	https
CheckPort	8443
CheckURL	/Cloudian/login.htm

6

Troubleshooting - Connections Rejected

When using a non-default TCP port or offloading for Cloudian services, you must ensure the Real Server port is correct. This is a common mistake when configuring the Real Servers when the Virtual Services port is different from the Real Server port. See the table in the Cloudian HyperStore section of this document for the required Real Server ports for Cloudian.

7

References

Some useful resources are available here: Cloudian Solutions.

Useful, related documents are listed below:

Transparency Feature Description

RESTful API documentation