Progress®
Kemp® LoadMaster®

Deployment Guide SharePoint

Generated on: 21 April 2026

Copyright

Visit the following page online to see Progress Software Corporation's current Product Documentation Copyright Notice/Trademark Legend: Product Documentation Copyright Notice & Trademarks | Progress

Table of Contents

Chapter 1: Introduction 5

Chapter 2: Template 7

Chapter 3: LoadMaster Global Settings 9

Layer 4 Considerations before Deployment 9

Enable Subnet Originating Requests Globally 10

Enable Check Persist Globally 11

Chapter 4: Configure the LoadMaster for SharePoint 12

Two-Armed Configurations 13

Configure SharePoint 2010 Virtual Services 13

Create a Virtual Service using a Template 13

Configuring the User Portal Site Virtual Services for SharePoint 2010 14

Configuring the Central Administration Site Virtual Services for SharePoint 2010 18

Configure SharePoint 2013 Virtual Services 22

Create a Virtual Service using a Template 22

Configure the User Portal Site Virtual Services for SharePoint 2013 23

Configure the Central Administration Site Virtual Services for SharePoint 2013 26

Configure SharePoint 2016 Virtual Services 30

Create a Virtual Service using a Template 30

Configure the User Portal Site Virtual Services for SharePoint 2016 31

Configure the Central Administration Site Virtual Services for SharePoint 2016 35

Configure SharePoint 2019 Virtual Services 39

Create a Virtual Service using a Template 39

Configure the User Portal Site Virtual Services for SharePoint 2019 40
Configure the Central Administration Site Virtual Services for SharePoint 2019 43

Chapter 5: Enabling the Edge Security Pack (ESP) with SharePoint . 49

Chapter 6: References 50

1

Introduction

Microsoft SharePoint is a web platform that provides many capabilities such as:

- Document management
- Version control
- File sharing
- Collaboration
- Social networking
- Enterprise search
- Business intelligence
- Workflow automation
- Website creation

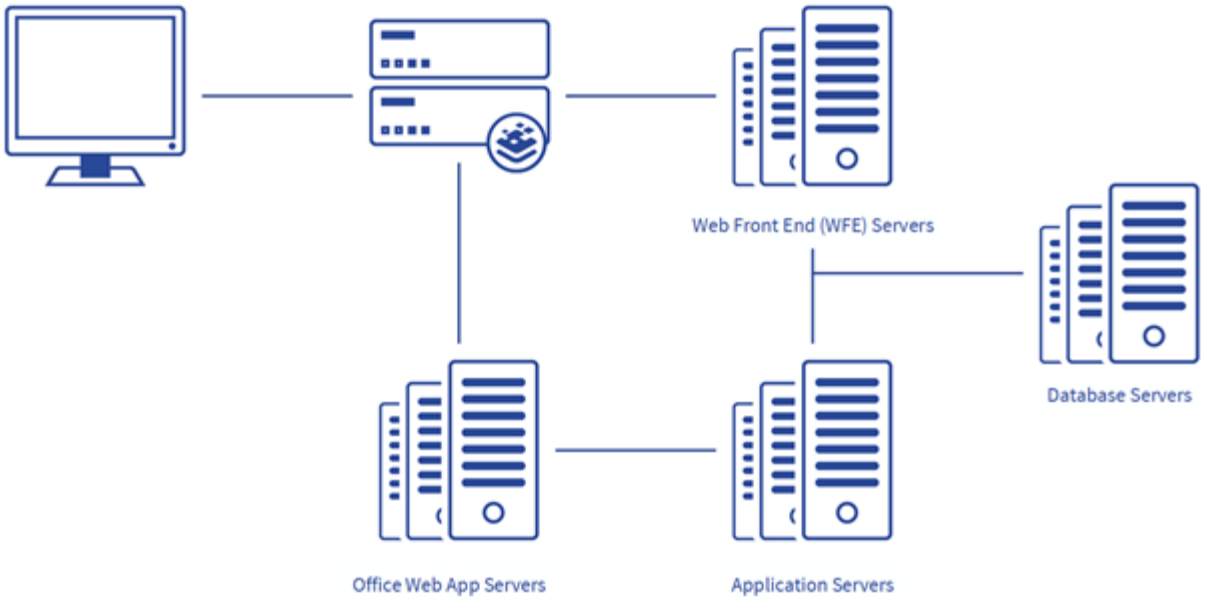

A SharePoint Server Farm can include application servers and Web Front End (WFE) servers. The WFE server is used to handle requests from clients. If the WFE server is receiving a lot of requests, it may be necessary to build multiple WFE servers and distribute the load amongst them. To provide resiliency and high performance, these WFEs should be load balanced.

The Office Web Apps (OWA) servers can also be managed and/or load balanced by using the LoadMaster. The SharePoint template and steps in this document provide options for both.

Document Purpose

This deployment guide provides instructions on how to configure the LoadMaster to load balance SharePoint using LoadMaster application templates. This guide should only be used as a reference for the load balancing configuration of SharePoint services because each environment is unique and may have different requirements. This guide outlines the load balancing configuration using the default SharePoint ports using LoadMaster application templates, but unique ports can also be leveraged based on the environment.

This guide also outlines the configuration of Virtual Services using Layer 7. Some environments may have the ability to leverage Layer 4, which can improve performance. Contact Progress Kemp Support for any questions regarding configuration options.

Prerequisites

It is assumed that if you are offloading SSL, an SSL certificate and key is already obtained and installed on the LoadMaster. For help with SSL certificates, refer to the SSL Accelerated Services Feature Description. It is also assumed that a working SharePoint environment is installed.

2

Template

Progress Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. For some workloads, additional manual steps may be required such as assigning a certificate or applying port following. These steps are covered in the document, if needed.

You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: LoadMaster Templates.

You can import templates to the LoadMaster through the **Manage Templates** page under **Virtual Services** in the main menu of the LoadMaster User Interface (UI).

Click **Choose File**, select the template to install and click **Add New Template**. The template will then be available to select when you are adding a new Virtual Service.

To begin the process of creating a new Virtual Service, click **Virtual Services** and **Add New** in the main menu.

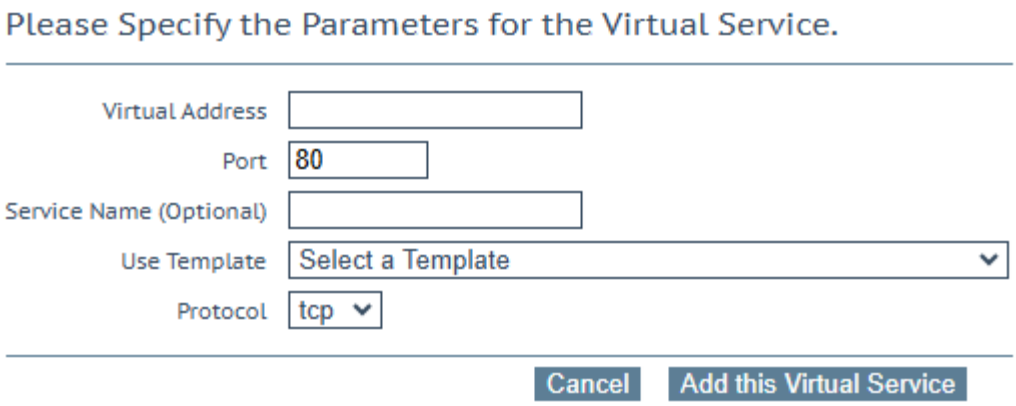

This opens the Virtual Service parameters page which prompts to enter the Virtual IP (VIP) address of the Virtual Service, the port, and the name to give the service and the protocol. You can select a previously-imported template in the **Use Template** drop-down list.

For more information and steps on how to use templates, refer to the Virtual Services and Templates, Feature Description.

3

LoadMaster Global Settings

Before setting up the Virtual Services, the following global settings should be configured to support the workload.

Contents

- Layer 4 Considerations before Deployment
- Enable Subnet Originating Requests Globally
- Enable Check Persist Globally

Layer 4 Considerations before Deployment

For this application, if you are using an L4 service, it is automatically transparent. When using transparency, the following should be considered:

If clients are on the same subnet as the Real Server, returning traffic to the LoadMaster is instead sent to the client. This is asymmetric routing and causes the client to drop the connection because it is expecting it from the LoadMaster, not the Real Server. The diagram below shows the flow of traffic when this rule is not followed.

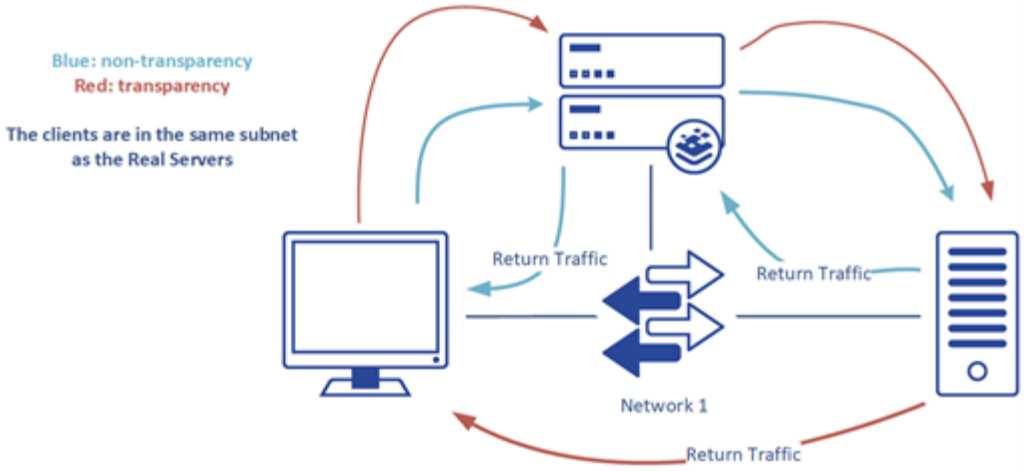

If the Real Servers' default gateway is not set to be the LoadMaster's interface (the shared IP if the LoadMasters are in HA), traffic returning to the LoadMaster is instead sent to the gateway. This is asymmetric routing and causes the connection to drop because the connection should be sent from the LoadMaster, not the Real Server. The diagram below shows the flow of traffic when this rule is not followed.

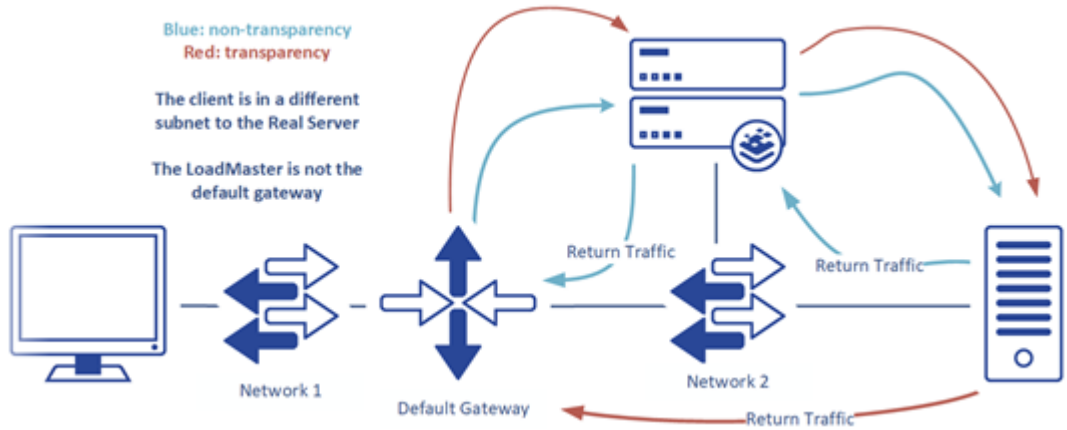

Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.



When **Subnet Originating Requests** is enabled, the Real Server sees traffic originating from 10.20.20.21 (LoadMaster eth1 address) and responds correctly in most scenarios.

With **Subnet Originating Requests** disabled, the Real Server sees traffic originating from 10.0.0.15 (LoadMaster Virtual Service address on **eth0**) and responds to **eth0** which could cause asymmetric routing.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster User Interface (UI), go to **System Configuration > Miscellaneous Options > Network Options**.
2. Select the **Subnet Originating Requests** check box.

Enable Check Persist Globally

It is recommended that you change the **Always Check Persist** option to **Yes – Accept Changes**. Use the following steps:

1. Go to **System Configuration > Miscellaneous Options > L7 Configuration**.
2. Click the **Always Check Persist** drop-down arrow and select **Yes – Accept Changes**.

4

Configure the LoadMaster for SharePoint

To configure the LoadMaster for SharePoint, you must set up Virtual Services:

- Some are for the Central Administration site, which is used to administer the SharePoint configuration overall. When you deploy the first SharePoint server, the management site is created. Further production sites can be created as needed.
- The other Virtual Services are for the User Portal Site. This is for access to MySites and the rest of the SharePoint infrastructure.

This guide contains a section on creating a Virtual Service in the WUI using a template. To configure the Virtual Services using the Application Programming Interface (API), refer to the RESTful API documentation.

The table in each section outlines the API settings and values. You can use this information when using the LoadMaster API and automation tools.

Using a template automatically populates the settings in the Virtual Services. This is quicker and easier than manually configuring each Virtual Service. If needed, changes can be made to any of the Virtual Service settings after using the template. For more information on the SharePoint templates, refer to the Template section.

It may be possible to have a single Virtual Service for both that has extra ports, but you might want different settings on the different Virtual Services, or you might want one Virtual Service to be only accessible internally, for example.

The sections below give instructions on how to set up Virtual Services for Microsoft SharePoint. Refer to the relevant sections for step-by-step instructions on configuring the Virtual Services, depending on your environment. The settings contained in this document are recommended by Progress Kemp. However, your specific configuration may require different settings.

For more information on each of the fields, refer to the Web User Interface (WUI) Configuration Guide.

Contents

- Two-Armed Configurations
- Configure SharePoint 2010 Virtual Services
- Configure SharePoint 2013 Virtual Services
- Configure SharePoint 2016 Virtual Services
- Configure SharePoint 2019 Virtual Services

Two-Armed Configurations

If you have a two-armed configuration with SSL offloading, you may need to enable subnet originating requests. This can either be done on a per-Virtual Service basis (**Subnet Originating Requests** field in **Standard Options** in the Virtual Service modify screen), or on a global basis (**System Configuration > Miscellaneous Options > Network Options > Subnet Originating Requests**).

Note: It is recommended that the **Subnet Originating Requests** option is enabled on a per-Virtual Service basis. While a one-armed configuration is not common, it is supported. For security best practice, you should separate the network that clients will connect to from the network that the Real Servers are on.

Configure SharePoint 2010 Virtual Services

Refer to the sections below for API parameters and values for the Virtual Services for SharePoint 2010. These Virtual Services are not all required – configure the relevant Virtual Services, based on your environment.

Contents

- Create a Virtual Service using a Template
- Configuring the User Portal Site Virtual Services for SharePoint 2010
- Configuring the Central Administration Site Virtual Services for SharePoint 2010

Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.
2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.

7. Type the **Real Server Address**.
8. Confirm that the correct port is entered.
9. Click **Add This Real Server**.

Configuring the User Portal Site Virtual Services for SharePoint 2010

The sections below outline the API parameters and values for the User Portal Site Virtual Services for SharePoint 2010. Refer to the relevant sections below depending on your environment.

Contents

- SharePoint 2010 HTTP Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Offloaded Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

SharePoint 2010 HTTP Virtual Service Recommended API Settings (optional)

SharePoint 2010 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
Transparent	0
Schedule	rr
Persist	src

API Parameter	API Value
PersistTimeout	3600
Idletime	900
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2010 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
Transparent	0
Schedule	rr
Persist	src
PersistTimeout	3600
Idletime	900
CheckUrl	/

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your

environment.

Add any Real Servers as needed.

SharePoint 2010 HTTPS Offloaded Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	rr
Persist	src
PersistTimeout	3600
Idletime	900
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2010 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Schedule	rr
Persistent	src
PersistTimeout	3600
Idletime	900
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

Configuring the Central Administration Site Virtual Services for SharePoint 2010

The sections below outline the API parameters and values for the Central Administration Site Virtual Services for SharePoint 2010. Refer to the relevant sections below depending on your environment.

Note: The Central Administration port is dynamic and is created during the installation of SharePoint. Ensure you update the tcp port when configuring the Virtual Service.

Contents

- SharePoint 2010 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2010 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

SharePoint 2010 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	8000
prot	tcp
VStype	http
Transparent	0
Schedule	rr
Persist	src

API Parameter	API Value
PersistTimeout	3600
Idletime	900
CheckType	http
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2010 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
Transparent	0
Schedule	rr
Persist	src
PersistTimeout	3600

API Parameter	API Value
Idletime	900
CheckType	https
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2010 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	rr
Persistent	src

API Parameter	API Value
PersistTimeout	3600
Idletime	900
CheckType	http
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

SharePoint 2010 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
SSLAcceleration	1
SSLReencrypt	1

API Parameter	API Value
CipherSet	BestPractices
Schedule	rr
Persist	src
PersistTimeout	3600
Idletime	900
CheckType	https
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

Configure SharePoint 2013 Virtual Services

Refer to the sections below for API parameters and values for the Virtual Services for SharePoint 2013. These Virtual Services are not all required – configure the relevant Virtual Services, based on your environment.

Contents

- Create a Virtual Service using a Template
- Configure the User Portal Site Virtual Services for SharePoint 2013
- Configure the Central Administration Site Virtual Services for SharePoint 2013

Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.

2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.
7. Type the **Real Server Address**.
8. Confirm that the correct port is entered.
9. Click **Add This Real Server**.

Configure the User Portal Site Virtual Services for SharePoint 2013

The sections below outline the API parameters and values for the User Portal Site Virtual Services for SharePoint 2013. Refer to the relevant sections below depending on your environment.

Contents

- SharePoint 2013 HTTP Virtual Service Recommended API Settings (optional)
- SharePoint 2013 HTTPS Virtual Service Recommended API Settings (optional)
- SharePoint 2013 HTTPS Offloaded Virtual Service Recommended API Settings (optional)
- SharePoint 2013 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

SharePoint 2013 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
Transparent	0
Schedule	rr
Idletime	900

API Parameter	API Value
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2013 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
Transparent	0
Schedule	rr
Idletime	900
CheckUrl	/

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2013 HTTPS Offloaded Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	rr
Idletime	900
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2013 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443

API Parameter	API Value
prot	tcp
SSLAcceleration	1
SSLReencrypt	1
CipherSet	Default
Transparent	0
Schedule	rr
Idletime	900
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

Configure the Central Administration Site Virtual Services for SharePoint 2013

The sections below outline the API parameters and values for the Central Administration Site Virtual Services for SharePoint 2013. Refer to the relevant sections below depending on your environment.

Note: The Central Administration port is dynamic and is created during the installation of SharePoint. Ensure you update the tcp port when configuring the Virtual Service.

Contents

- SharePoint 2013 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2013 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)

- SharePoint 2013 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2013 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

SharePoint 2013 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	8000
prot	tcp
VStype	http
Transparent	0
Schedule	rr
Idletime	900
CheckType	http
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2013 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
Transparent	0
Schedule	rr
Idletime	900
CheckType	https
CheckUrl	/

Add any Real Servers as needed.

SharePoint 2013 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http

API Parameter	API Value
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	rr
Idletime	900
CheckType	http
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

SharePoint 2013 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http

API Parameter	API Value
Transparent	0
Schedule	rr
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Idletime	900
CheckType	https
CheckUrl	/

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

Configure SharePoint 2016 Virtual Services

Refer to the sections below for API parameters and values for the Virtual Services for SharePoint 2016. Not all these Virtual Services are required – configure the relevant Virtual Services based on your environment.

Contents

- Create a Virtual Service using a Template
- Configure the User Portal Site Virtual Services for SharePoint 2016
- Configure the Central Administration Site Virtual Services for SharePoint 2016

Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.

2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.
7. Type the **Real Server Address**.
8. Confirm that the correct port is entered.
9. Click **Add This Real Server**.

Configure the User Portal Site Virtual Services for SharePoint 2016

The sections below outline the API parameters and values for the User Portal Site Virtual Services for SharePoint 2016. Refer to the relevant sections below depending on your environment.

Contents

- SharePoint 2016 HTTP Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Offloaded Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Re-encrypt Central Administration Site Virtual Service Recommended API Settings (optional)

SharePoint 2016 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
Transparent	0
Schedule	lc
Idletime	900

API Parameter	API Value
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Add any Real Servers as needed.

SharePoint 2016 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
Transparent	0
Schedule	lc
Idletime	900
CheckUrl	/

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2016 HTTPS Offloaded Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	lc
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual service. Whether you require one or not depends on your environment.

Add any Real servers as needed.

SharePoint 2016 HTTPS Re-encrypt Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Schedule	lc
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Configure the Central Administration Site Virtual Services for SharePoint 2016

The sections below outline the API parameters and values for the Central Administration Site Virtual Services for SharePoint 2016. Refer to the relevant sections below depending on your environment.

Note: The Central Administration port is dynamic and is created during the installation of SharePoint. Ensure you update the tcp port when configuring the Virtual Service.

Contents

- SharePoint 2016 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2016 HTTPS Re-encrypt Central Administration Site Virtual Service Recommended API Settings (optional)

SharePoint 2016 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	8000
prot	tcp
VStype	http
Transparent	0
Schedule	lc
Idletime	900

API Parameter	API Value
CheckType	http
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Add any Real Servers as needed.

SharePoint 2016 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
Transparent	0
Schedule	lc
Idletime	900
CheckType	https

API Parameter	API Value
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Add any Real Servers as needed.

SharePoint 2016 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	lc
Idletime	900

API Parameter	API Value
CheckType	http
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description SSL Services on the Progress Kemp Documentation Page

Add any Real Servers as needed.

SharePoint 2016 HTTPS Re-encrypt Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Schedule	lc

API Parameter	API Value
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Configure SharePoint 2019 Virtual Services

Refer to the sections below for API parameters and values for the Virtual Services for SharePoint 2019. These Virtual Services are not all required – configure the relevant Virtual Services based on your environment.

Contents

- Create a Virtual Service using a Template
- Configure the User Portal Site Virtual Services for SharePoint 2019
- Configure the Central Administration Site Virtual Services for SharePoint 2019

Create a Virtual Service using a Template

To configure a Virtual Service using the application template, perform the following steps:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.
2. Type a valid **Virtual Address**.
3. Select the appropriate template in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. Expand the **Real Servers** section.
6. Click **Add New**.
7. Type the **Real Server Address**.
8. Confirm that the correct port is entered.

9. Click **Add This Real Server**.

Configure the User Portal Site Virtual Services for SharePoint 2019

The sections below outline the API parameters and values for the User Portal Site Virtual Services for SharePoint 2019. Refer to the relevant sections below depending on your environment.

Contents

- SharePoint 2019 HTTP Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Offloaded Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

SharePoint 2019 HTTP Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	80
prot	tcp
Transparent	0
Schedule	lc
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format

API Parameter	API Value
	HOST:URL.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
Transparent	0
Schedule	lc
Idletime	900
CheckUrl	/

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Offloaded Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	lc
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description SSL Services on the Progress Kemp Documentation Page.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Re-encrypt Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	443
prot	tcp
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Schedule	lc
Idletime	900
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

It is optional to add a HTTP redirector Virtual Service. Whether you require one or not depends on your environment.

Configure the Central Administration Site Virtual Services for SharePoint 2019

The sections below outline the API parameters and values for the Central Administration Site Virtual Services for SharePoint 2019. Refer to the relevant sections below depending on your environment.

Note: The Central Administration port is dynamic and is created during the installation of SharePoint.

Ensure you update the tcp port when configuring the Virtual Service.

Contents

- SharePoint 2019 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)
- SharePoint 2019 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

SharePoint 2019 HTTP Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	8000
prot	tcp
VStype	http
Transparent	0
Schedule	lc
Idletime	900
CheckType	http
CheckUrl	/

API Parameter	API Value
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
Transparent	0
Schedule	lc
Idletime	900
CheckType	https
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application

API Parameter	API Value
	configured in Alternate Access Mappings in the format HOST:URL.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Offloaded Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
SSLAcceleration	1
CipherSet	BestPractices
Transparent	0
Schedule	lc
Idletime	900
CheckType	http

API Parameter	API Value
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

SharePoint 2019 HTTPS Re-encrypted Central Administration Site Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Progress Kemp application template. These settings can be used with scripts and automation tools.

API Parameter	API Value
port	10894
prot	tcp
VStype	http
SSLAcceleration	1
SSLReencrypt	1
CipherSet	BestPractices
Schedule	lc

API Parameter	API Value
Idletime	900
CheckType	https
CheckUrl	/
CheckHeaders	Enter the HOST and URL of the Web Application configured in Alternate Access Mappings in the format HOST:URL.

Ensure you add your SSL certificate to the Virtual Service. For more information, refer to the SSL Accelerated Services Feature Description.

Add any Real Servers as needed.

5

Enabling the Edge Security Pack (ESP) with SharePoint

If desired, you can use ESP with SharePoint. To do this, follow the steps in the ESP, Feature Description but ensure to select either **Permanent Cookies Always** or **Permanent Cookies only on Private Computers** for the **Use Session or Permanent Cookies** option.

Note: Selecting a permanent cookie option ensures that Office documents can be opened correctly from SharePoint.

6

References

Other useful documents are as follows:

Edge Security Pack (ESP) Feature Description

Web User Interface (WUI) Configuration Guide

IPsec Tunneling Feature Description

Virtual Services and Templates Feature Description

SSL Accelerated Services Feature Description