



## **Tutorial: Connecting a Progress Corticon Decision Service to a Database using EDC**



# Copyright

---

© 2019 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

Corticon, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Deliver More Than Expected, Icenium, Kendo UI, Kinvey, NativeScript, OpenEdge, Powered by Progress, Progress, Progress Software Developers Network, Rollbase, SequeLink, Sitefinity (and Design), Sitefinity, SpeedScript, Stylus Studio, TeamPulse, Telerik, Telerik (and Design), Test Studio, and WebSpeed are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries. Analytics360, AppServer, BusinessEdge, DataDirect Autonomous REST Connector, DataDirect Spy, SupportLink, DevCraft, Fiddler, JustAssembly, JustDecompile, JustMock, Kinvey Chat, NativeChat, NativeScript Sidekick, OpenAccess, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

**Updated: 2019/07/31**



# Table of Contents

**Tutorial - Connecting a Progress Corticon Decision Service to a Database using EDC.....7**

**How database elements map to Vocabulary elements.....9**

**Setting up the tutorial.....11**

**Scenario 1: Generating a database schema from an existing Vocabulary.....17**

**Scenario 2: Mapping an existing Vocabulary with an existing database schema.....29**

**Deploying a Decision Service that accesses a database.....47**



## Tutorial - Connecting a Progress Corticon Decision Service to a Database using EDC

---

Corticon Decision Services can connect to a database to perform read, write, and delete operations on it. If your Decision Service needs to access a database, your role as a Corticon integration developer is to enable database access. There are three techniques for Corticon database integration.

- Enterprise Data Connector (EDC) where data loads are moderate and tight integration with rules in an intuitive and friendly way is preferred.
- Advanced Data Connectors (ADC) that enable connection to multiple databases to access stored SQL queries through service call-outs.
- Batch Processing that let you use stored SQL queries to chunk large data flows and persist responses in a database.

This tutorial uses EDC. To get started, you need to perform two tasks:

- Map a Vocabulary to a database in Corticon Studio in one of two ways:
  - Create a database schema from an existing Vocabulary
  - Map an existing Vocabulary to an existing database schema
- Configure database access properties during deployment in Corticon Server.

In this tutorial, you will learn how to perform these tasks.

This tutorial is designed for hands-on use. We recommend that you install Corticon Studio, and then follow the instructions and illustrations in the tutorial. This tutorial is based on Corticon 6.0.

---

**Note:** You will install Corticon Server later as part of the tutorial.

---





---

## How database elements map to Vocabulary elements

---

For rules in a Decision Service to read or write to a database, the Vocabulary elements used in the rules must be mapped to elements in the database. In the Basic Rule Modeling tutorial, you learned about Vocabulary elements—entities, attributes, and associations. Let's take a look at how these Vocabulary elements correspond to elements in a database.

As you know, a relational database is a set of tables. Each table in the database corresponds to an entity in a Vocabulary. Each record in the table corresponds to an entity instance in a Ruletest. Columns in the table correspond to attributes in the entity. Table joins or table relationships correspond to associations in the Vocabulary. Finally, the database's schema is like the Vocabulary tree.

This table summarizes the relationship between a Vocabulary and a database:

Vocabulary	Database
Entity	Table
Attribute	Table column
Association	Table join
Entity instance	Row or record
Vocabulary	Database schema

As an integration developer, you are responsible for mapping the Vocabulary to the database. You must map each entity used in a rule to a table in the database, each attribute to a column, etc. Once the mapping is configured, rules that use mapped entities and attributes will automatically access the database. You configure all of this mapping in Corticon Studio.

Before you do any mapping, you should gather and identify mapping requirements. Generally, you will encounter one of the following scenarios:

- Scenario 1—you have an **existing Vocabulary** but **no corresponding database schema**. In this case, you need to generate the database schema from the Vocabulary.
- Scenario 2—you have an **existing Vocabulary** and an **existing database schema**. In this case, you need to map Vocabulary elements with database elements.

---

## Setting up the tutorial

---

Before you work on each scenario, you need to set up your environment for the tutorial. You must:

- Install Microsoft SQL Server Express
- Configure Microsoft SQL Server Express
- Download and import a sample Corticon rule project

---

**Note:** EDC can work with a number of relational databases such as Oracle, Progress OpenEdge, IBM DB2, MySQL, and Microsoft SQL Server. For this tutorial, we will use Microsoft SQL Server Express 2014, which is free to use and distribute. All the instructions in this tutorial will assume you are using SQL Server Express.


---

### Step 1: Installing Microsoft SQL Server Express

Microsoft SQL Server Express and Tools is a version of SQL Server that is free to use and distribute. Follow these steps to download, install, and configure SQL Server Express 2014 software:

1. **Download the appropriate installer.** On the webpage <https://www.microsoft.com/en-us/download/details.aspx?id=42299>, click **Download**.
2. On the *Choose the download that you want* page, select: `ExpressAndTools64BIT\SQLEXPRWT_x64_ENU.exe`
3. Click **Next**.
4. In your downloads location, unzip its contents.
5. In the **SQL Server Express** folder, double-click **SETUP**.
6. In the **SQL Server Installation Center** wizard that opens, click **New SQL Server stand-alone installation or add features to an existing installation**.

7. Perform a typical installation, accepting the license agreement and retaining the default settings in each screen, and clicking **Next** until you reach the **Database Engine Configuration** panel.
8. IMPORTANT: On the **Database Engine Configuration** panel's **Server Configuration** tab:
  - a. Select Mixed Mode (SQL Server and Windows authentication)
  - b. In the **Enter Password** and **Confirm Password** fields, enter **sqlserver2014password**. This password is for a default administrator user named

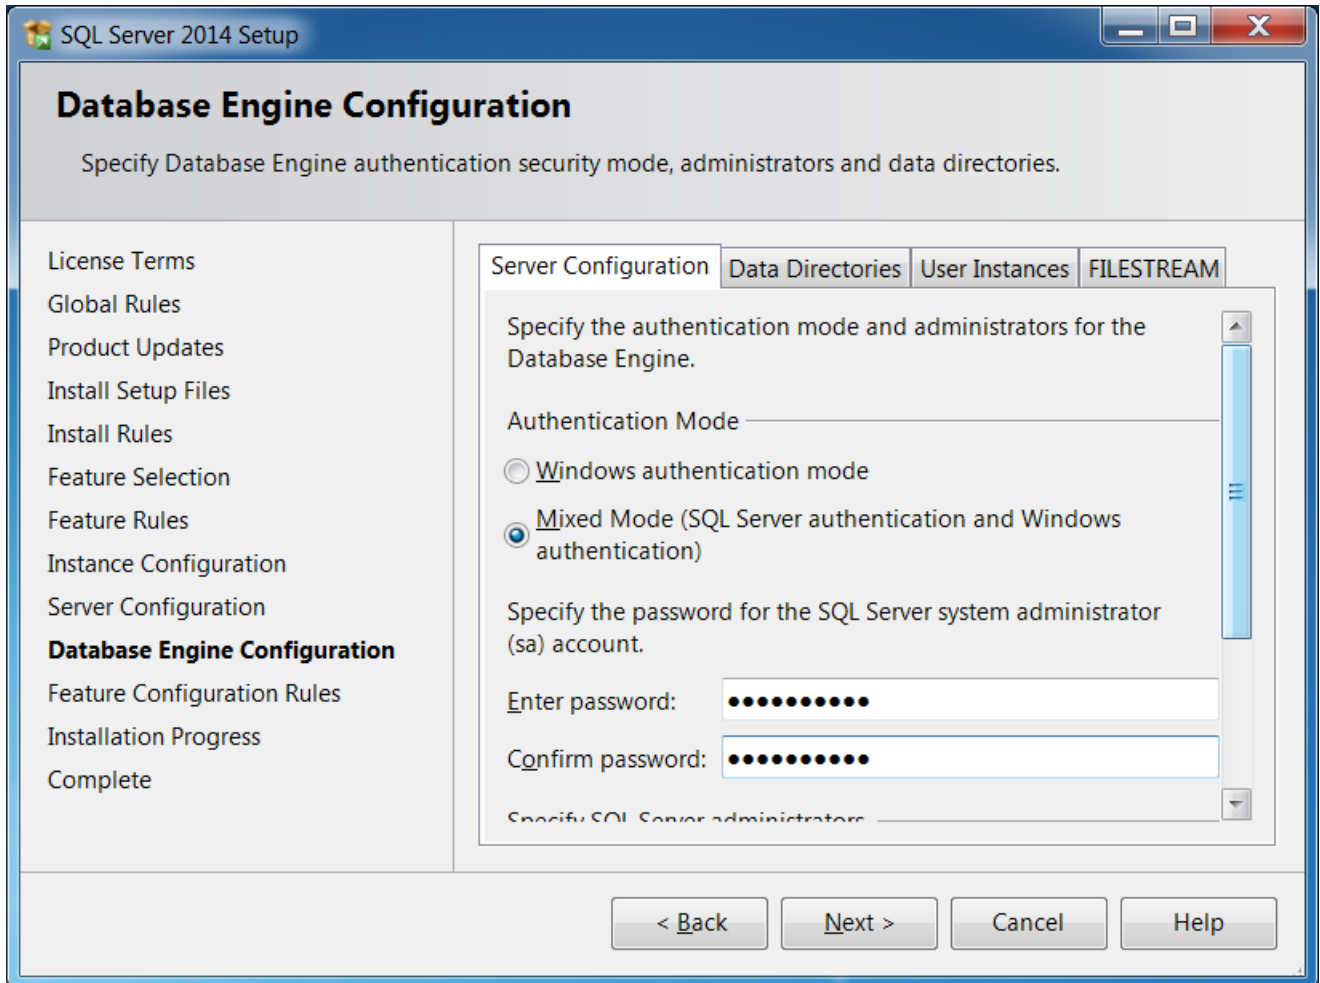


9. Click **Next** on the remaining panels, and then click **Close** to exit the wizard.

You've now installed SQL Server Express and its tools. The SQL Server Express database engine starts up automatically.

## Step 2: Configuring Microsoft SQL Server Express


Corticon wants to connect to a database through TCP/IP on a designated port. We'll configure SQL Server Express for that in these steps:

1. Choose **Start > Microsoft SQL Server 2014 > SQL Server 2014 Configuration Manager**.
2. Expand **SQL Server Network Configuration** in the left pane and select **Protocols for**

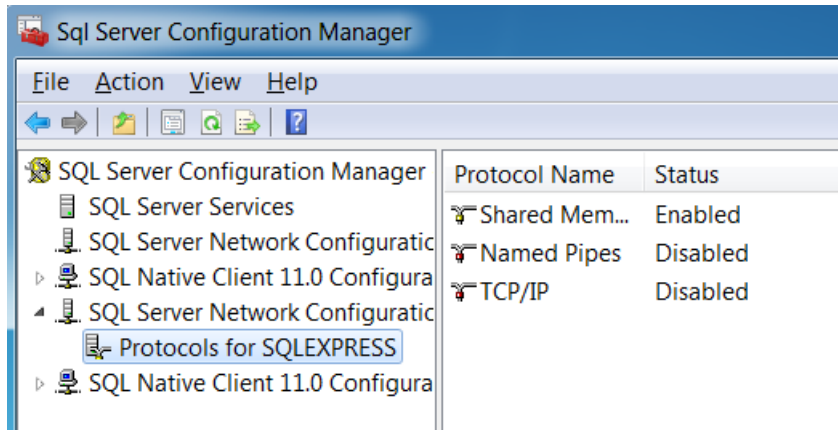

**SQLEXPRESS.**


3. Right-click **TCP/IP** in the right pane and select **Properties**.
4. In the **TCP/IP Properties** window, click the **IP Addresses** tab and scroll to the bottom.
5. In the **IPAll** section's **TCP Port** field, enter **1433**, click **Apply**, and then

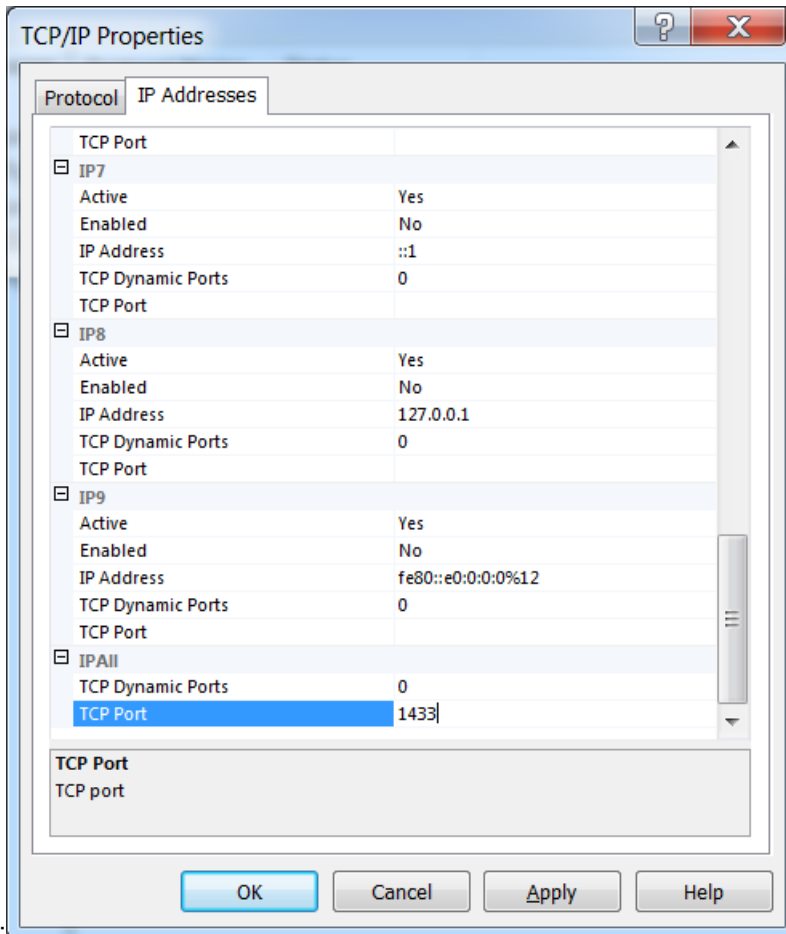


**OK:**

6. Click **OK** in the **Warning** message box.

- Right-click **TCP/IP** and click **Enable**. Click **OK** to any warning

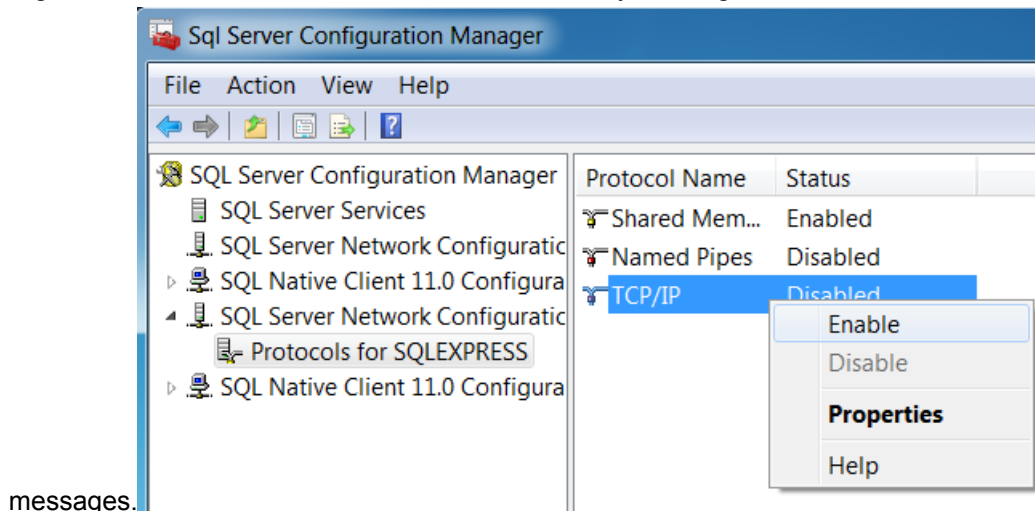

- Restart SQL Server Express by selecting **SQL Server Services** in the left pane, right-clicking **SQL Server (SQLEXPRESS)** on the right, and then choosing

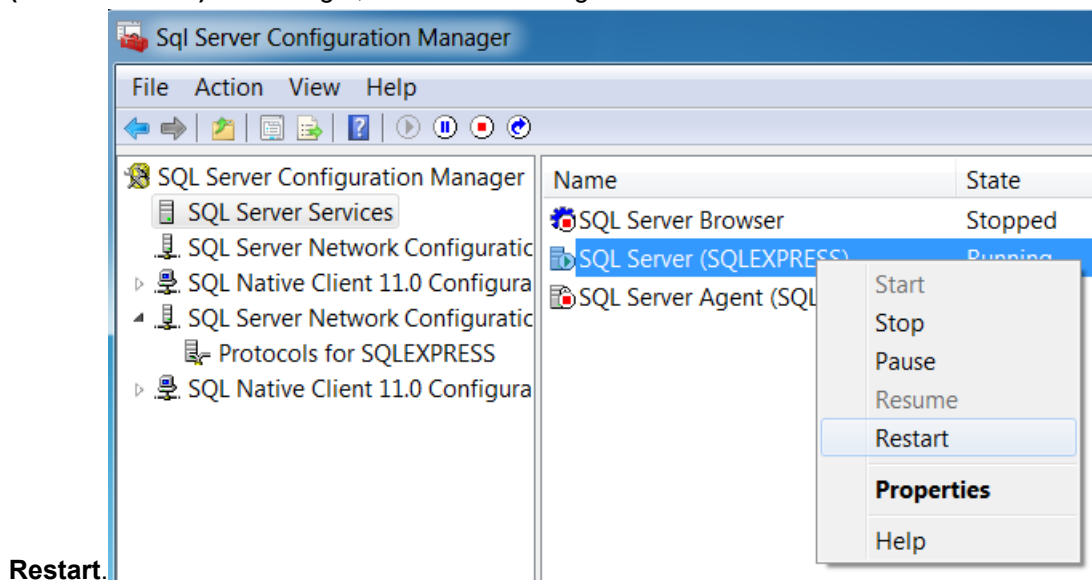


### Step 3: Downloading and importing a sample rule project

Next, download and import the sample rule project **Connecting\_EDC** which contains two Vocabularies, several Rulesheets and Ruletests, and a Ruleflow. As part of this tutorial, you will map these Vocabularies to databases in SQL Server. You can then run the Ruletests to verify that the rules in the Rulesheets are able to perform operations on the databases. Later in the tutorial, you will deploy the Ruleflow as a Decision Service using the appropriate database settings.

Follow these steps to download and import the sample rule project:


- Click [here](#)> to access the sample rule project **Connecting\_EDC** stored in the Corticon Information Hub. Save the ZIP file.
- Choose the **Start** menu command **Progress > Corticon 6.0 Studio**.
- In Studio, select the menu command **File > Import**.

4. In the **Import** wizard, select **General > Existing Projects into Workspace** and click

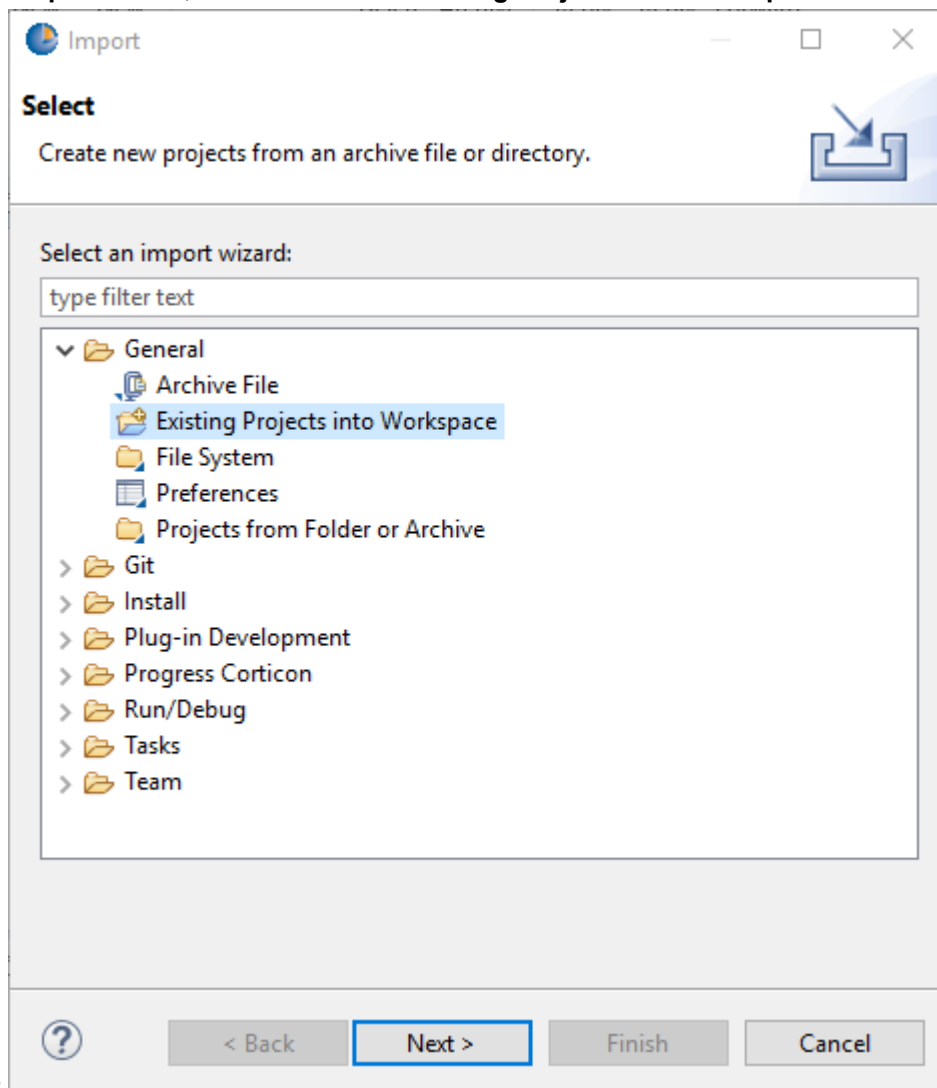

Next.

5. On the Import Projects page:
  - a. Click **Select archive file** and specify the location of the **Connecting\_EDC.zip** file.
  - b. Click **Finish**.
6. Expand the **Connecting\_EDC** rule project, and you see two folders: **Scenario1** and **Scenario2**. Each folder contains a Vocabulary and some Rulesheets and Ruletests. The Scenario2 folder also includes the Ruleflow that you will deploy later.

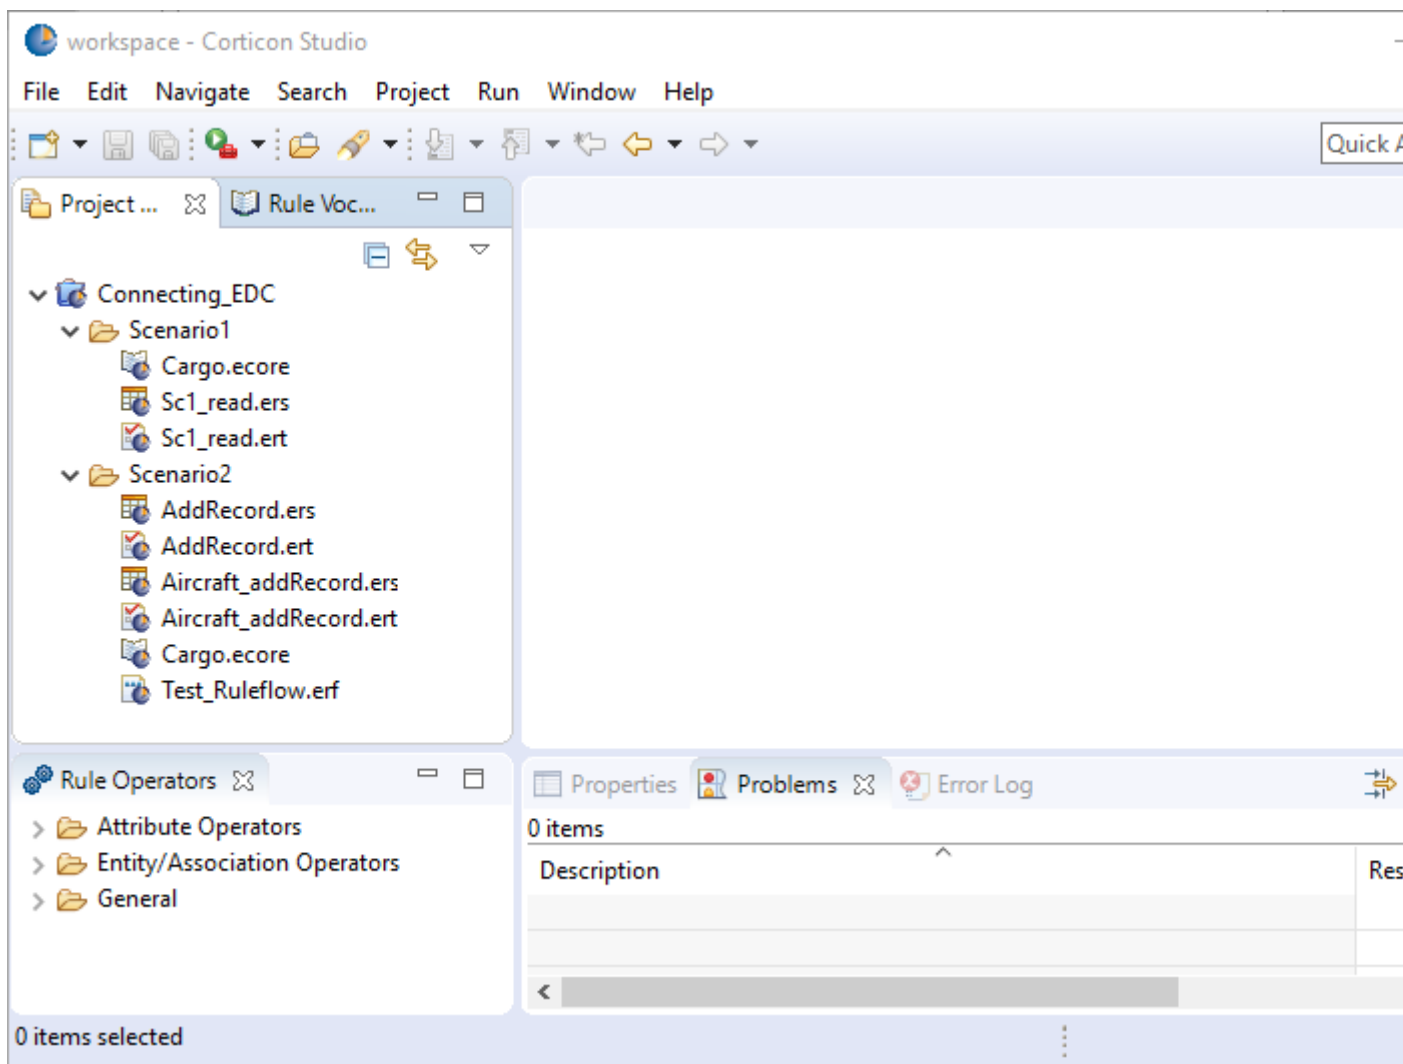

7. Select the menu command **Project > Upgrade Rule Assets**. Click through the dialogs to ensure that the assets in both scenarios are up to date.

Success! Your environment is now ready to use!

You will use the Cargo Vocabulary in Scenario1 to generate a database schema, and you will map the Cargo Vocabulary in Scenario2 to an existing database schema that you will create later. The Rulesheets and Ruletests enable you to do some testing. By running the Ruletests, you can verify that the rules are able to access the database. The Ruleflow in Scenario2 enables you to perform the last task in this tutorial—configuring database settings in Corticon Server during deployment.



## Scenario 1: Generating a database schema from an existing Vocabulary

---

Let's look at the scenario where you have an existing Vocabulary and you need to create a database schema based on the Vocabulary. You must perform the following steps:

- Create a database—while the database schema can be generated from the Vocabulary, the database must exist before the schema is generated.
- Setting up entities that will be mapped to the database
- Define database connection properties.
- Create the database schema from the Vocabulary.


### Creating a database

Let's create a database named **Scenario1**.


On the **Start** menu, choose **Microsoft SQL Server 2014 > SQL Server 2014 Management Studio**.

In the Connect to Server window:


- Select SQL Server Authentication in the Authentication drop-down.
- Enter **sa** in the **Username** field.
- Enter **sqlserver2014password** in the **Password** field.
- Click **Connect**.

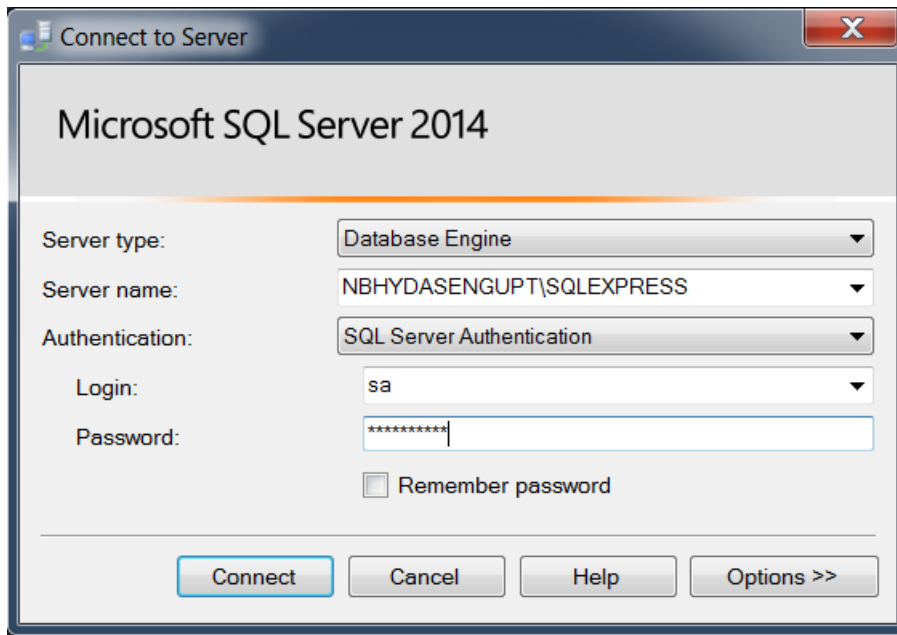


- Right-click Databases and select New Database.

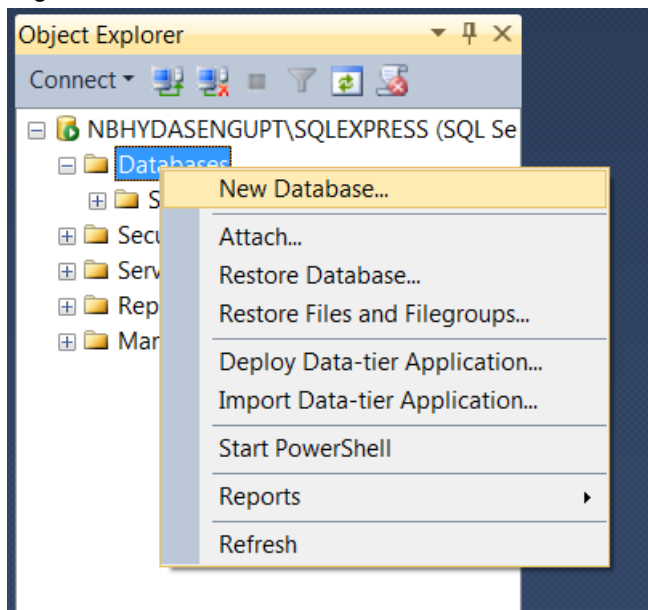

- Enter Scenario1 in the Database name field and click OK.

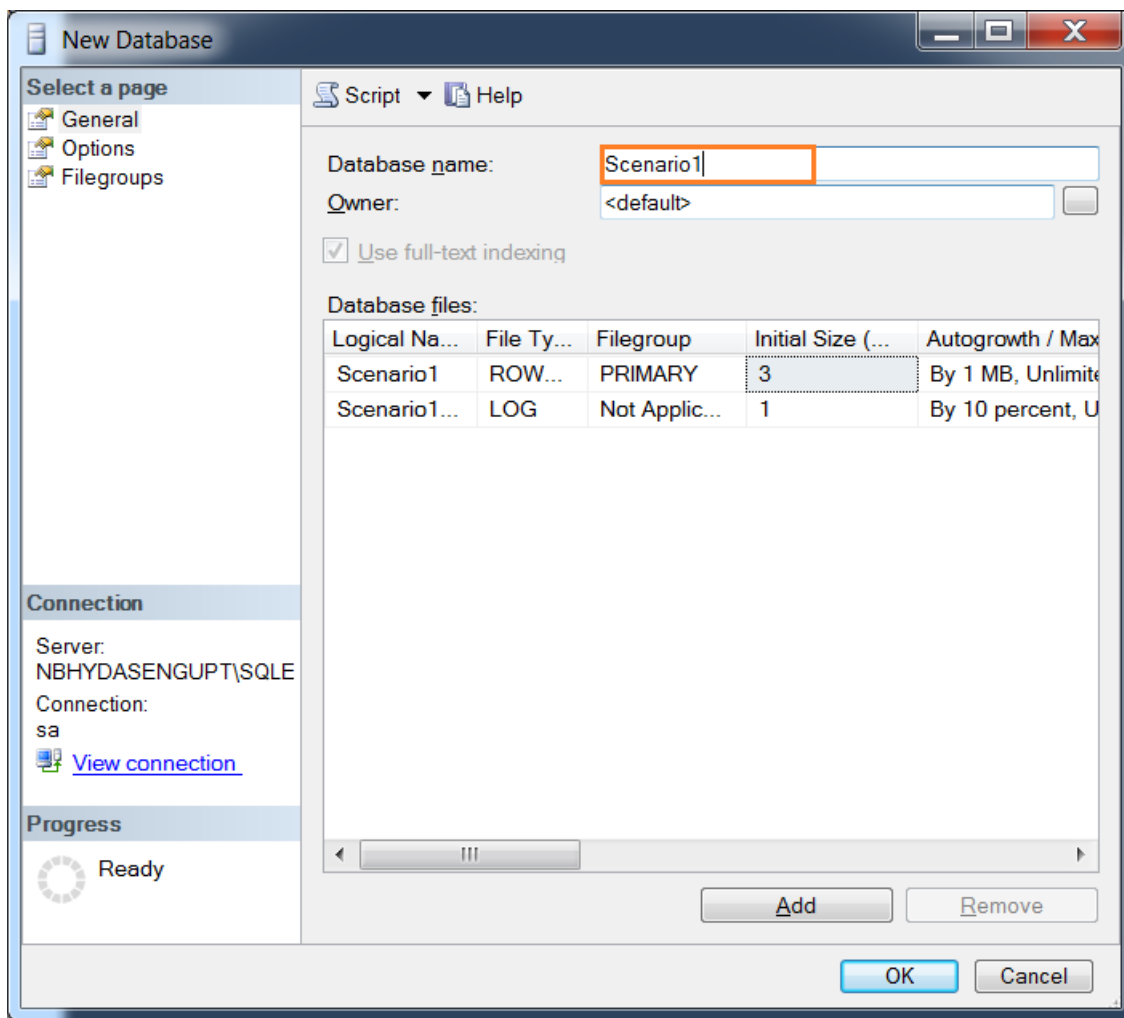

The database Scenario1 gets created and is displayed in the Databases folder.

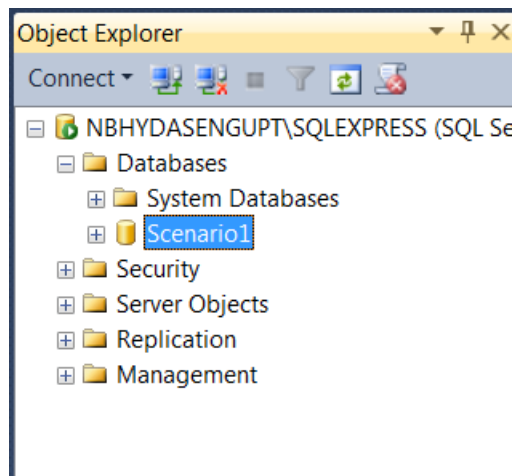


## Adding the EDC Datasource to the Vocabulary

First, we need to declare that we want to use an EDC Datasource.

In the Studio, open **Cargo.ecore** under **Scenario1** in the **Connecting\_EDC** rule project.

Choose the Vocabulary menu command **Add Datasource > Add EDC Datasource**.

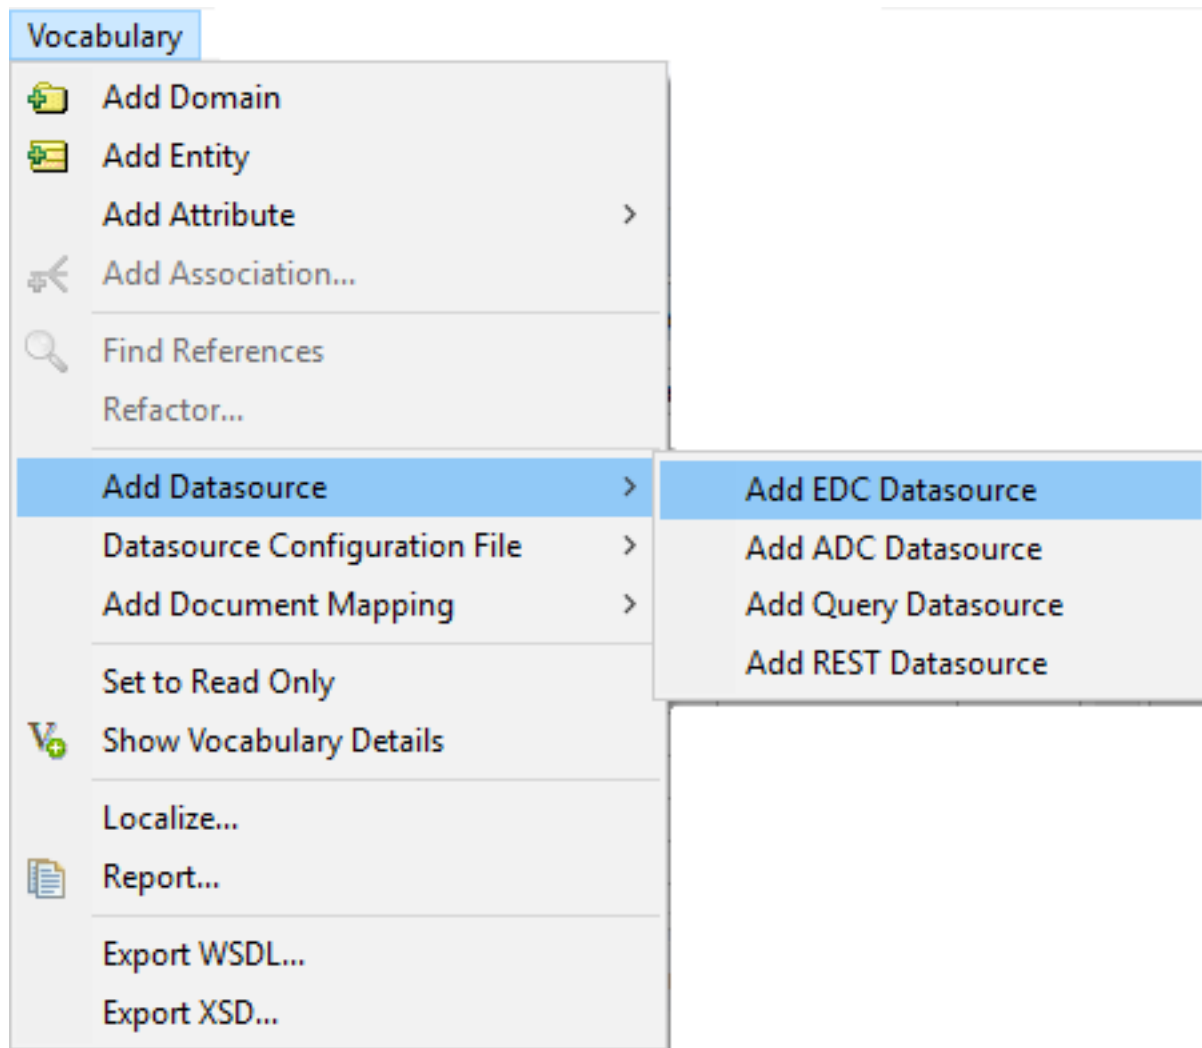


### Setting up entities for mapping

The next step is to set up the Vocabulary's entities for mapping. To do this, you configure each entity to persist to the database and choose a primary key for each entity.


EDC gives you a number of options for assigning primary keys. For SQL Server, you could choose an Identity strategy. For Oracle, you could choose a Sequence strategy. A more common option is to assign an attribute as the primary key for the entity. This makes sense if the attribute identifies the entity. In this tutorial, you will use this technique.

Select the **Aircraft** entity in the Vocabulary. In the **Properties** editor on the right, click the **Datastore Persistent** drop-down, and then select **Yes**.

On the **Datasource** pulldown, choose **EDC**. The icon of the Aircraft entity changes to include a database icon, indicating that the Aircraft entity is now configured for EDC and will be stored in the database together with its attributes and associations.

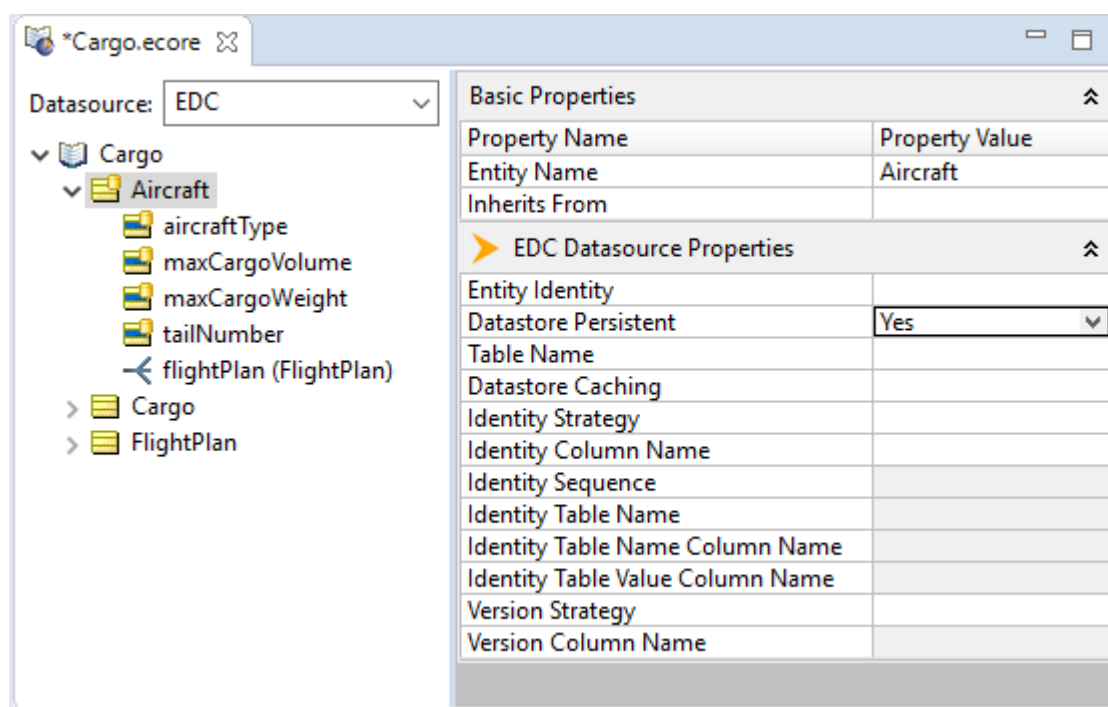

Let's assign **tailNumber** as the primary key for Aircraft.  
Select the **Entity Identity** drop-down and select **tailNumber**.

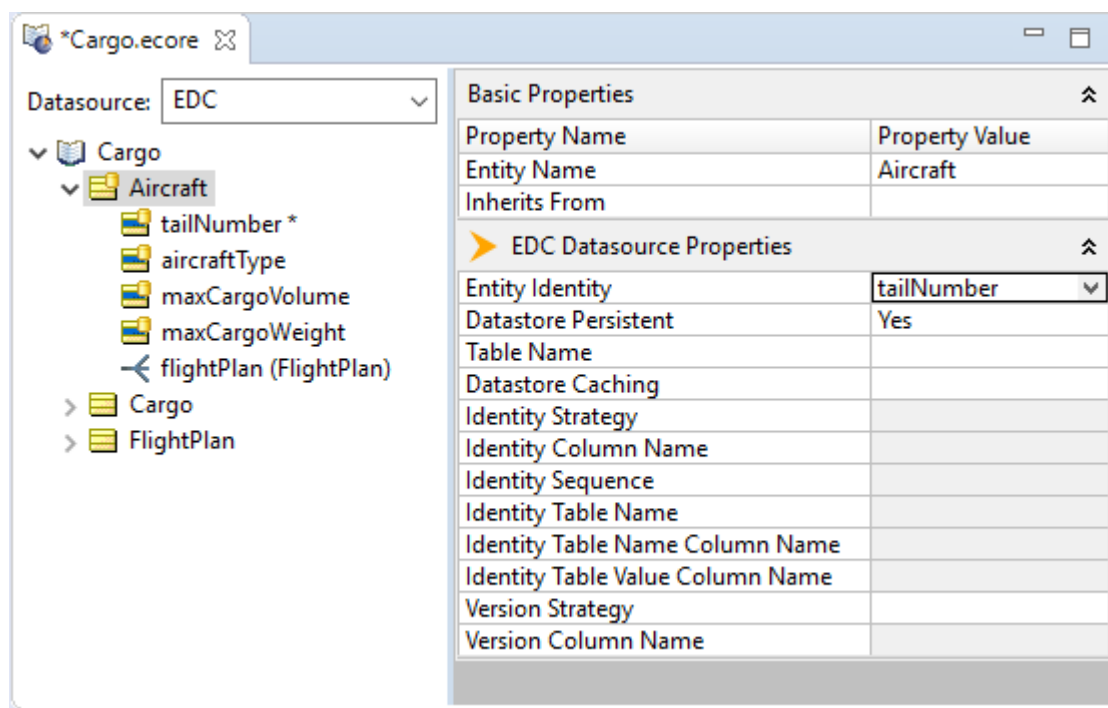


The **tailNumber** attribute in the Aircraft entity will now be mapped as its primary key, so it moves up to the top of the list of attributes in the entity, and is marked with an asterisk.

Configure the other two entities—Cargo and FlightPlan.

- For Cargo, choose **manifestNumber** as the Entity Identity.
- For FlightPlan, choose **flightNumber** as its Entity Identity.

Your Vocabulary will look like this:

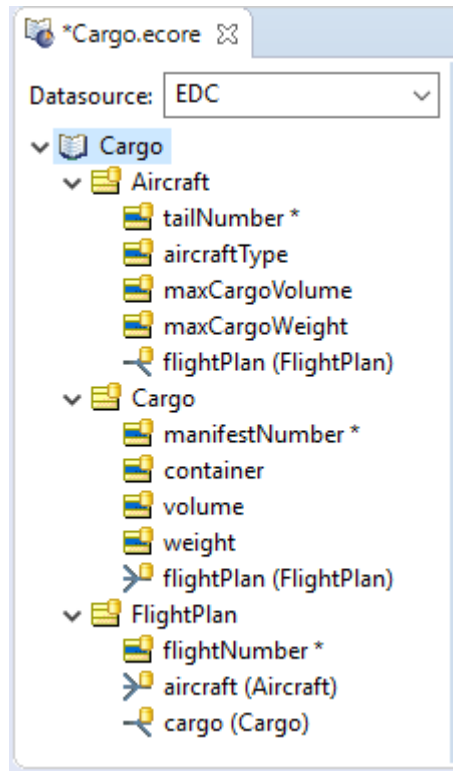


### Defining database connection properties in the Vocabulary

The next step is to define the database connection properties in the Vocabulary. This enables Corticon to connect to the database and generate the schema from the Vocabulary.

First, choose **File > Save** to store what we have done so far.


Now, we'll define database connection properties:

- Select the **Cargo** root node in the Vocabulary tree, and then click the **EDC** tab.
- Specify the following database properties:
  - Database Server: **Microsoft SQL Server 2014**
  - Database URL: **jdbc:progress:sqlserver://localhost:1433;databaseName=Scenario1**
  - Username: **sa**
  - Password: **sqlserver2014password**
- Finally, let's test if the Vocabulary is able to connect to the database. Click **CONNECTION Test**. You see a message indicating that the connection was successful.

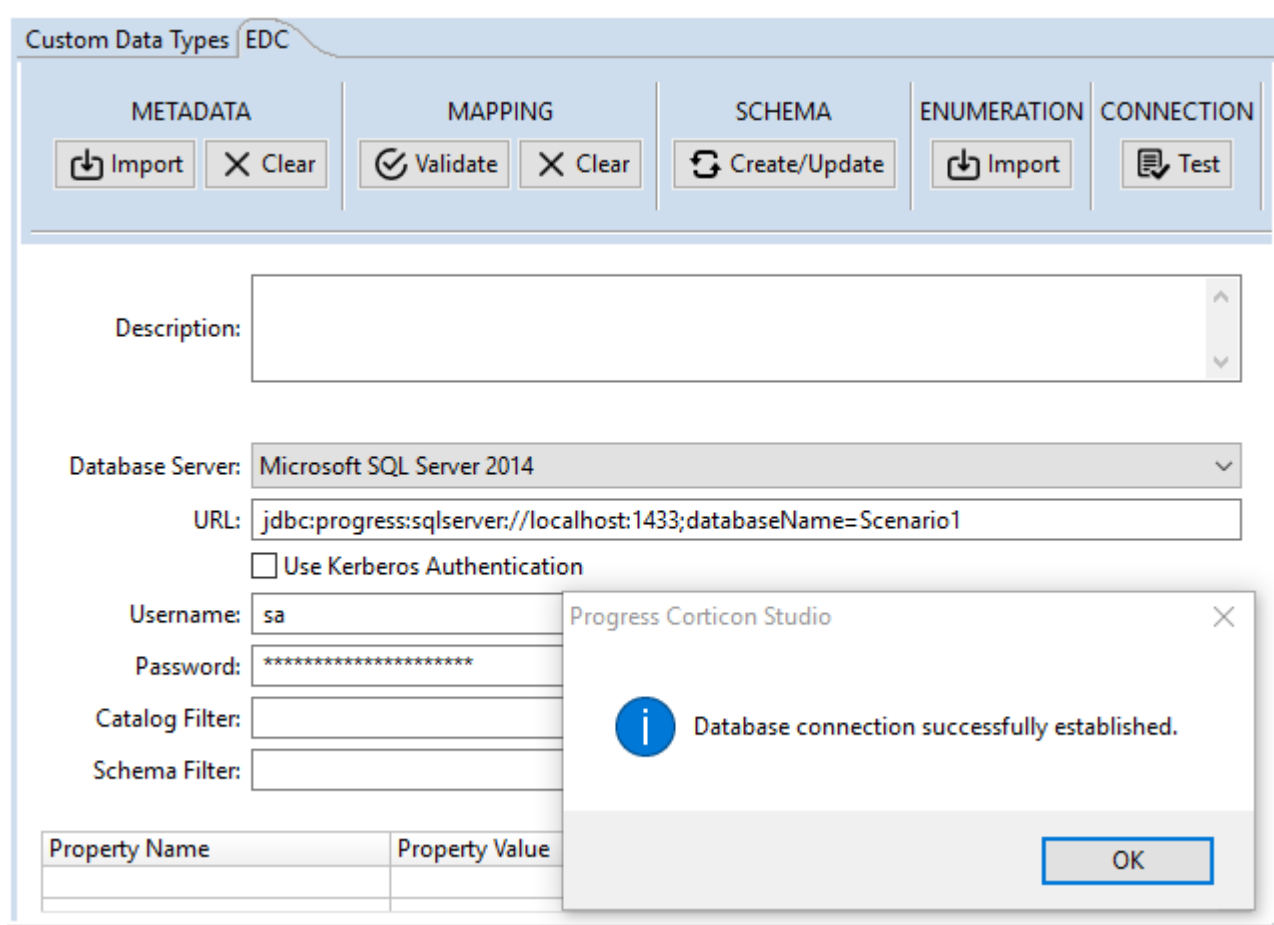


## Creating a database schema from the Vocabulary

Now that the Vocabulary is connected to the database, you can create a database schema from it. To do this, click Create/Update on the EDC tab.

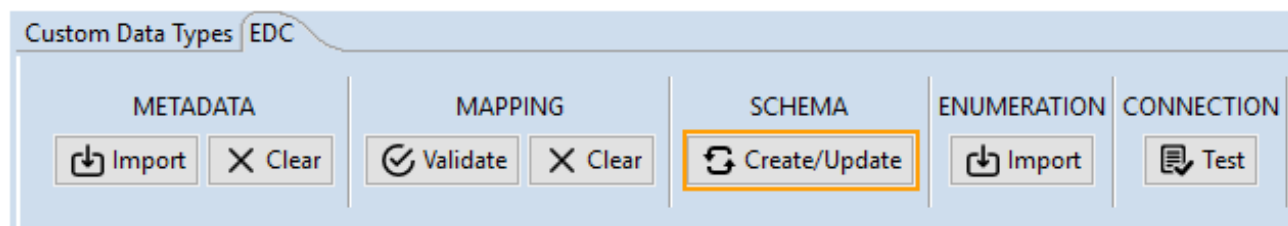


In the Schema Update Warning dialog box, click Yes.

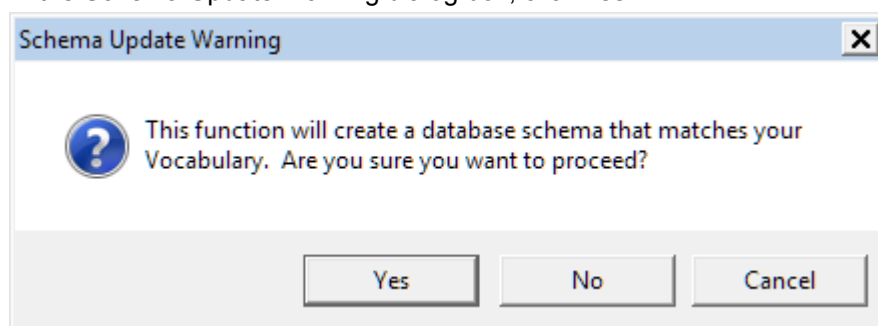

Corticon Studio takes a few seconds to create the database schema; after which you get a message stating that the procedure completed successfully.

Let's verify that a table is created in the database for each entity in the Vocabulary. In SQL Server Management Studio, expand Databases > Scenario1 > Tables folder. You see the tables:

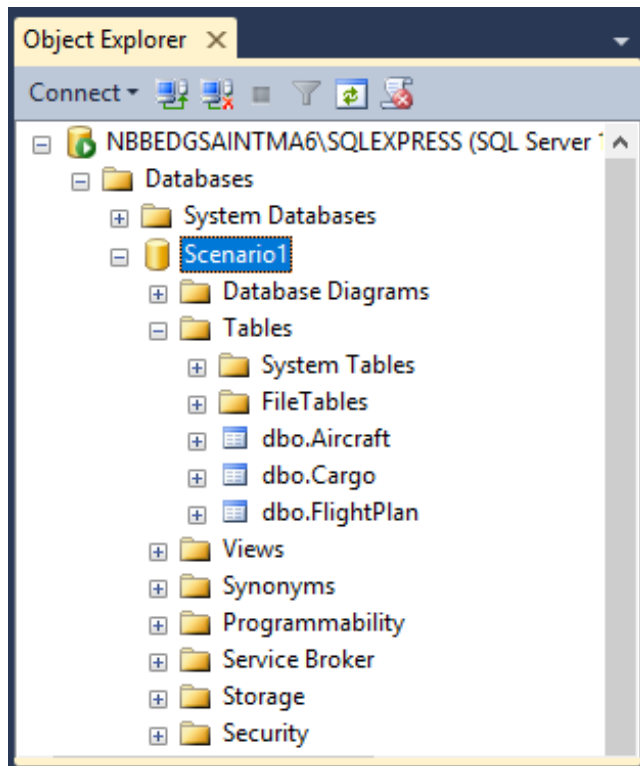

### Testing


Now that the Vocabulary and database are connected and mapped, let's do some testing. Although this is typically performed by the rule modeler, doing it as part of this tutorial lets you verify that the rules are able to access the database. Let's populate the database with some sample data and then run the Ruletests.

Populating sample data

Follow these steps to populate sample data:

- In SQL Server Management Studio, select File > New > Query with Current Connection. A new SQL Script file opens in a text editor.




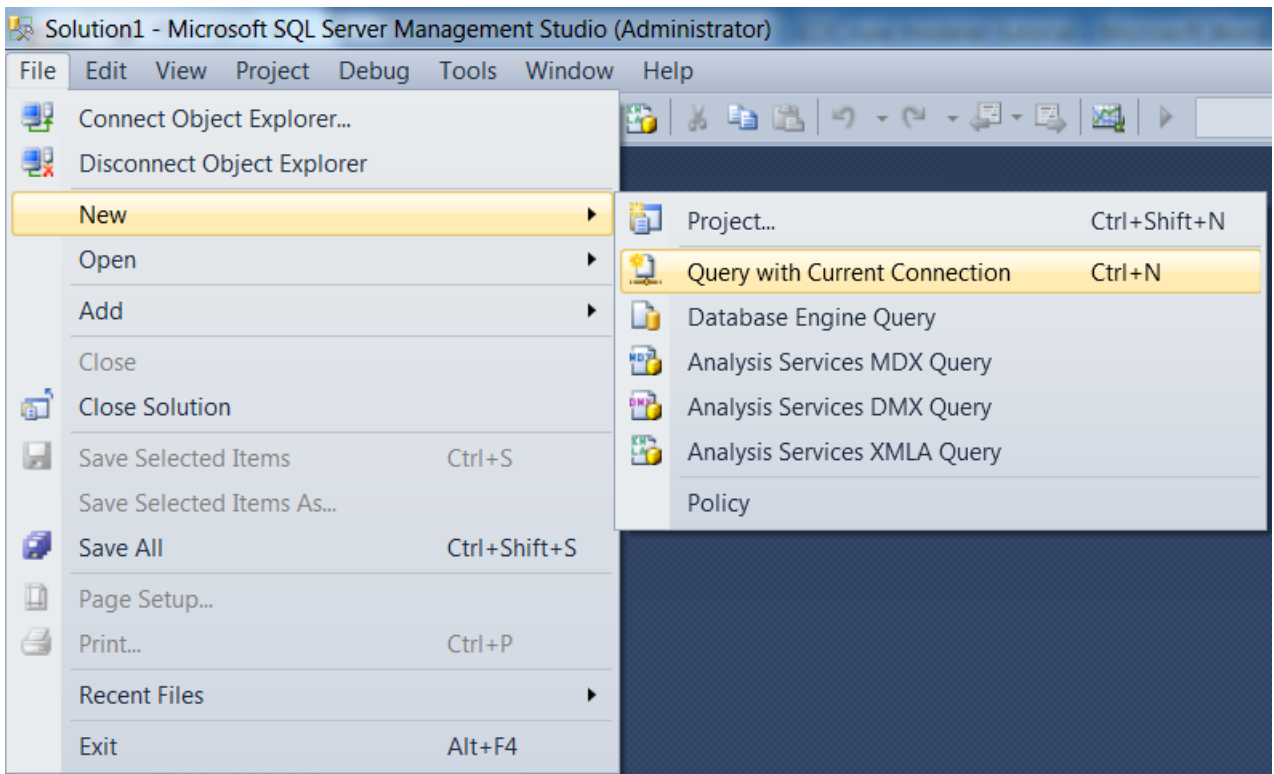

- Copy and paste these lines of code into the text editor:

```
INSERT INTO Scenario1.DBO.Aircraft
(aircraftType, maxCargoVolume, maxCargoWeight, tailNumber)
VALUES ('747', 7500, 150000, 'N111A');
INSERT INTO Scenario1.DBO.FlightPlan
(RaircraftAssoc_tailNumber, flightNumber)
VALUES ('N111A', 111);
INSERT INTO Scenario1.DBO.Cargo
(RflightPlanAssoc_flightNumber, container, manifestNumber, volume, weight)
VALUES (111, 'STANDARD', '625A', 3000, 100000);
INSERT INTO Scenario1.DBO.Cargo
(RflightPlanAssoc_flightNumber, container, manifestNumber, volume, weight)
VALUES (111, 'HEAVY', '625B', 5000, 150000);
```

- Click **Execute**.

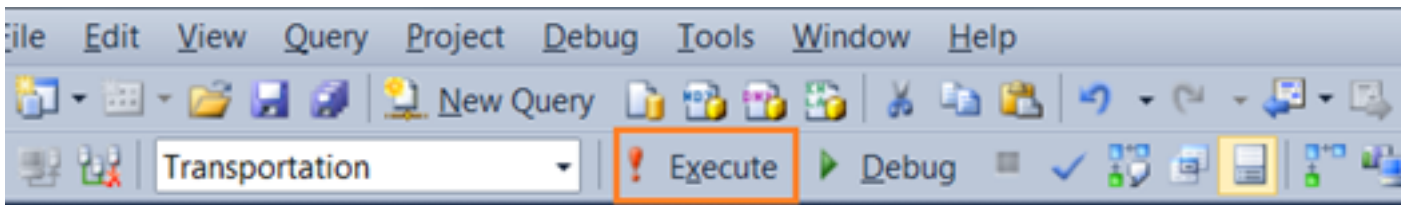

You see messages indicating that rows have been added to the tables.

## Running the Ruletest

Open the Rulesheet Sc1\_read.ers in the Scenario1 subfolder in the sample Rule Project. The rules in this Rulesheet check if the total cargo weight assigned to a FlightPlan is greater than the maximum cargo weight of the aircraft assigned to the same FlightPlan.

Cargo.ecore

Sc1\_read.ert

\*Sc1\_read.ers

Scope

FlightPlan

aircraft (Aircraft) [plane]

cargo (Cargo) [load]

Filters

1

2

3

4

5

Conditions

		0	1
a	load.weight->sum > plane.maxCargoWeight		T
b			
c			
d			
e			

Actions

Post Message(s)

A			
B			
C			
D			
Overrides			


Rule Statements

Rule Messages

Ref	ID	Post	Alias	Text
1		Violation	FlightPlan	The total cargo weight exceeds the maximum cargo weight of the aircraft assigned to the FlightPlan
2		Info	FlightPlan	The aircraft assigned to the FlightPlan can carry the cargo

In the previous step, you populated the Scenario1 database with data about Cargo, FlightPlan, and Aircraft. Running the Ruletest will verify that the rule can read those records from the database.

Open the Ruletest named Sc1\_read.ert and verify that its database access setting is set to Read Only. Select Ruletest > Testsheet > Database Access and verify that the Read Only option has a checkmark next to it.

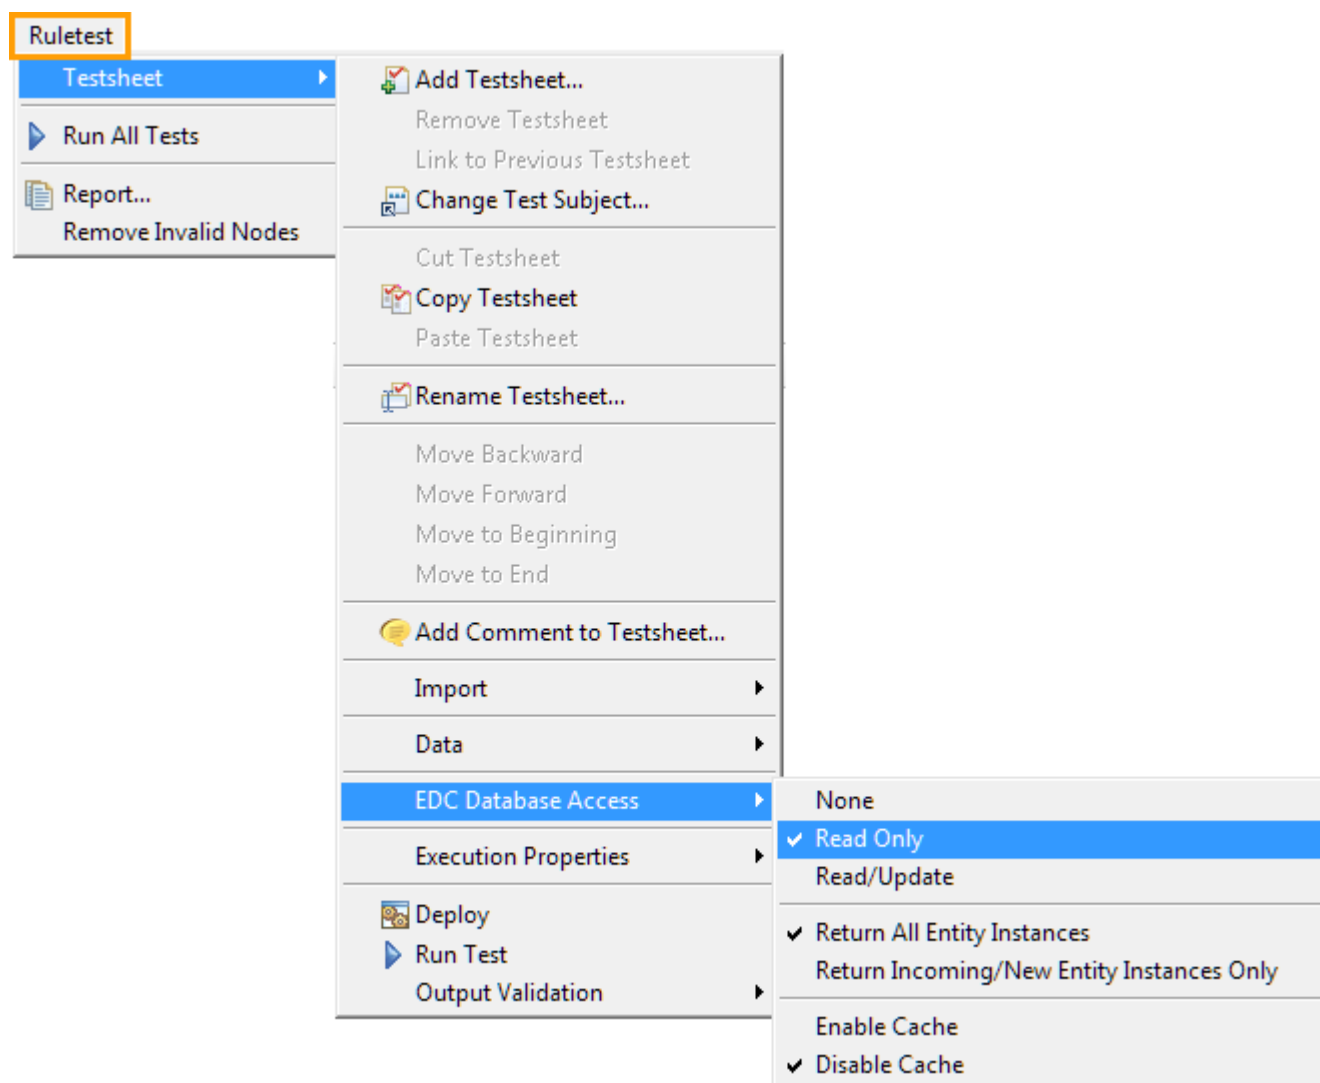

Run the test. You see the following results:

The screenshot displays the Corticon Rule Editor interface. At the top, there are tabs for 'Cargo.ecore', 'Sc1\_read.ers', and '\*Sc1\_read.ert'. Below the tabs, the path '/Connecting\_EDC/Scenario1/Sc1\_read.ers' is shown. The main area is divided into two panes: 'Input' and 'Output'.

**Input Pane:**

- FlightPlan [1]
  - flightNumber [111]

**Output Pane:**

- FlightPlan [1]
  - flightNumber [111]
  - aircraft (Aircraft) [1]
    - aircraftType [747]
    - maxCargoVolume [7500.000000]
    - maxCargoWeight [150000.000000]
    - tailNumber [N111A]
  - cargo (Cargo) [1]
    - container [STANDARD]
    - manifestNumber [625A]
    - volume [3000]
    - weight [100000]
  - cargo (Cargo) [2]
    - container [HEAVY]
    - manifestNumber [625B]
    - volume [5000]
    - weight [150000]

At the bottom, there are tabs for 'Rule Statements', 'Comments', and 'Rule Messages'. The 'Rule Messages' tab is active, showing a table with the following content:

Severity	Message
Violation	The total cargo weight exceeds the maximum cargo weight of the aircraft assigned to the FlightPlan

As you can see, based on the flightNumber in input, Corticon retrieved the FlightPlan record and the records of all the instances associated with it, using the record's foreign keys. This data was then processed by the rule and the result displayed in the Ruletest's Output pane.

That completes our look at Scenario1. Let's cleanup to prepare for Scenario2:

Choose File > Save All, and then choose File > Close All

Collapse the Scenario1 folder, and then expand the Scenario2 folder

The screenshot shows the Project Explorer in the Corticon IDE. The 'Connecting\_EDC' folder is expanded, revealing two sub-folders: 'Scenario1' and 'Scenario2'. The 'Scenario1' folder is collapsed, while the 'Scenario2' folder is expanded, showing a list of files: 'AddRecord.ers', 'AddRecord.ert', 'Aircraft\_addRecord.ers', 'Aircraft\_addRecord.ert', 'Cargo.ecore', and 'Test\_Ruleflow.ert'.

---

## Scenario 2: Mapping an existing Vocabulary with an existing database schema

---

In this scenario, you have an existing Vocabulary and an existing database and you need to map them. As part of mapping them, you configure the Vocabulary to connect to the database and import the database's metadata. During import, if Corticon finds an element in the database that has a corresponding element with a matching name in the Vocabulary, it automatically maps those elements. For example, if the Vocabulary has a FlightPlan entity and the database has a FlightPlan table, Corticon automatically maps them. You only have to manually map elements that have different names.

In this tutorial's example, you will create a database named Scenario2 that has a schema similar to the Cargo Vocabulary in the Scenario2 folder in the Connecting\_EDC rule project. The Cargo Vocabulary and Scenario2 database must be mapped as follows:

Cargo Vocabulary	Scenario2 Database
Entity: Cargo	Table: Shipment
Container	container
manifestNumber*	manifestNumber*
Volume	volume
Weight	weight
Entity: Aircraft	Table: Plane
aircraftType	planeType
maxCargoVolume	maxCargoVolume
maxCargoWeight	maxCargoWeight
tailNumber*	tailNumber*
Entity: FlightPlan	Table: FlightPlan
flightNumber*	flightNumber*


\* Primary key

As you can see, most names match, but some elements in the Vocabulary—such as the Cargo entity (Shipment in the database), Aircraft entity (Plane in the database), and the aircraftType attribute (planeType in the database) have differently-named corresponding elements in the database. You need to map these elements manually.


### Creating a new database

Let's start by creating a new database and tables that can be mapped to the Cargo.ecore Vocabulary.

In SQL Server Management Studio, right-click Databases and select New Database.

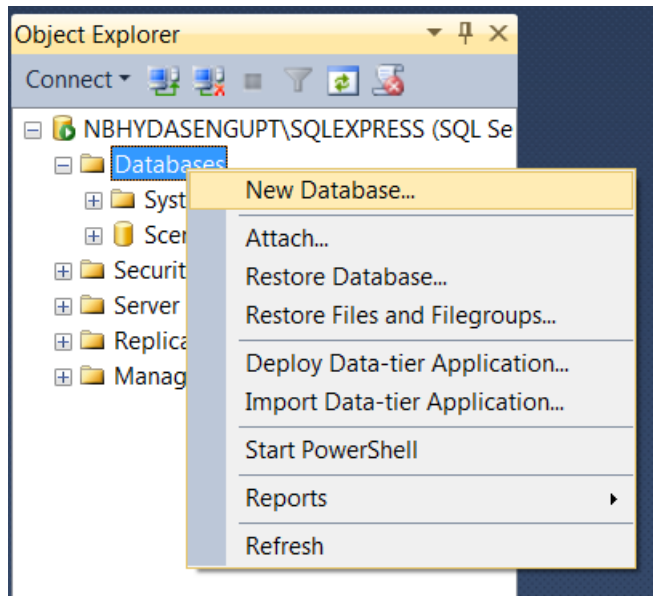


In the New Database window, enter Scenario2 as the Database name and click OK.

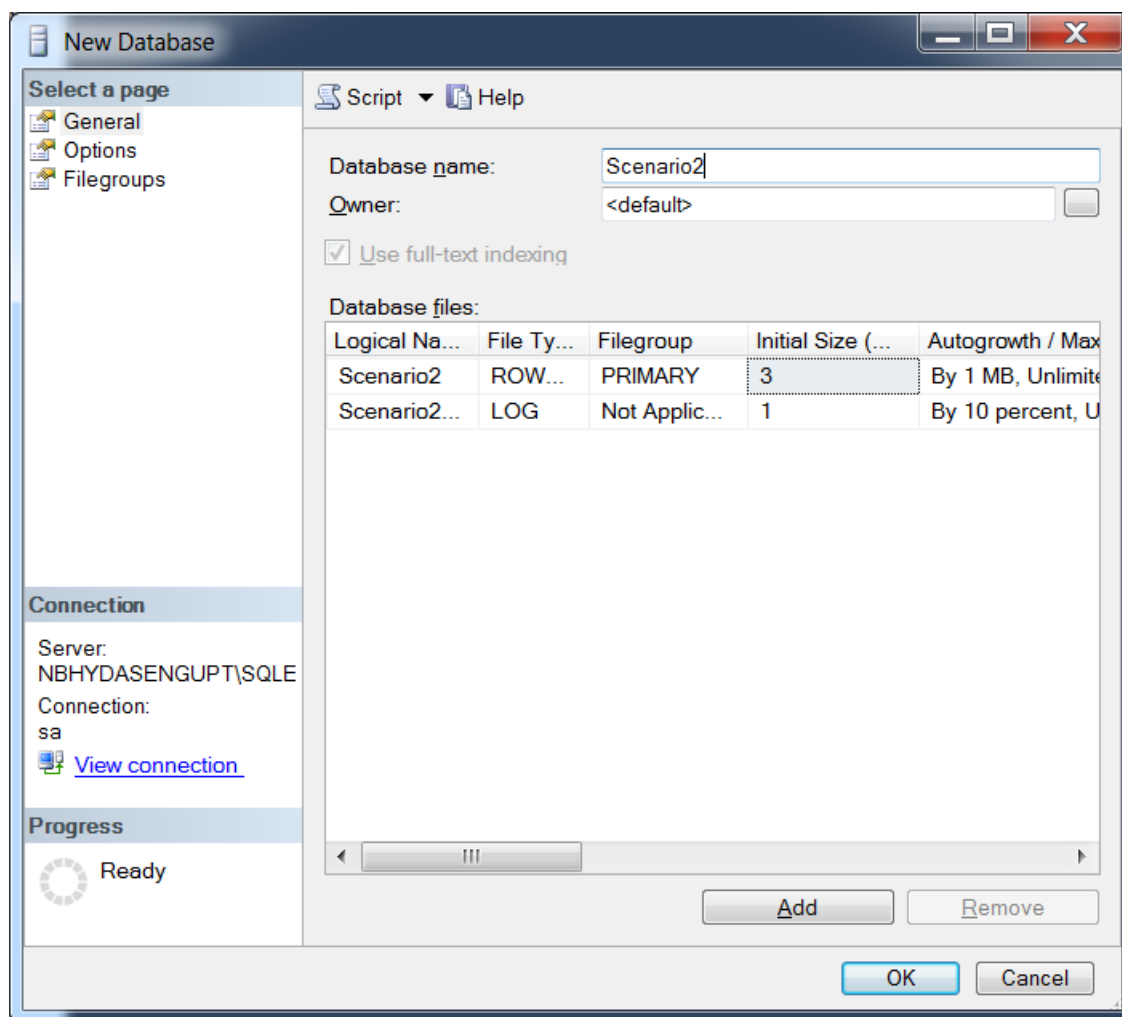

Next, let's create tables in the database. We will later map these tables and their columns to entities and attributes in the Cargo.ecore Vocabulary.

In SQL Server Management Studio, select File > New > Query with Current Connection.

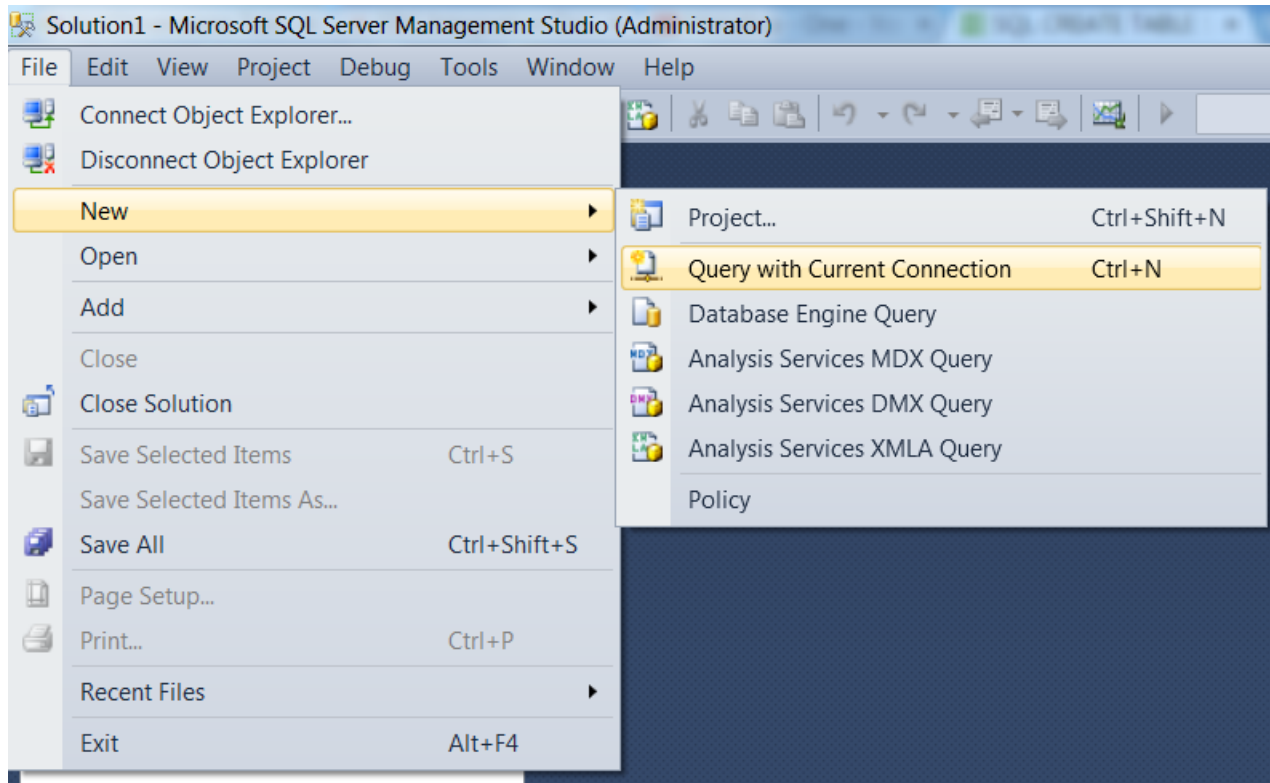

In the SQL script editor, copy and paste the following code:

```
CREATE TABLE Scenario2.dbo.Plane
(planeType varchar(50),
maxCargoVolume decimal,
maxCargoWeight decimal,
tailNumber varchar(50) NOT NULL PRIMARY KEY);


CREATE TABLE Scenario2.dbo.FlightPlan
(flightNumber int NOT NULL PRIMARY KEY,
tailNumber varchar(50) FOREIGN KEY REFERENCES Scenario2.dbo.Plane(tailNumber));

CREATE TABLE Scenario2.dbo.Shipment
(container varchar(50),
manifestNumber varchar(50) NOT NULL PRIMARY KEY,
volume decimal,
weight decimal,
flightNumber int FOREIGN KEY REFERENCES Scenario2.dbo.FlightPlan(flightNumber));
```


Click Execute.

You see a message indicating that the command executed successfully.



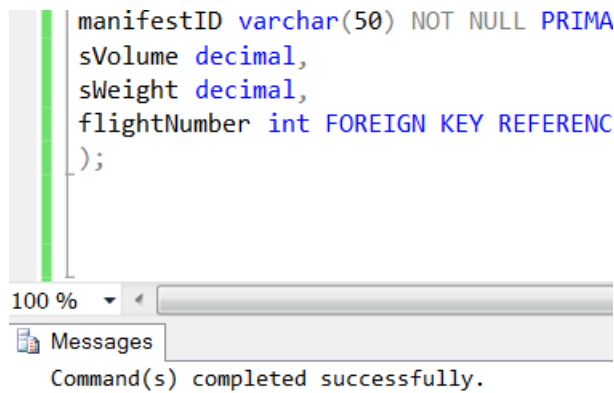

Expand **Databases > Scenario2 > Tables** in the **Object Explorer** view on the left. You see its three tables—`dbo.FlightPlan`, `dbo.Plane`, and `dbo.Shipment`:

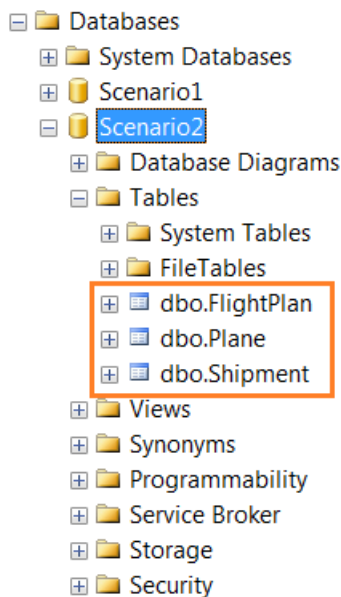


## Adding the EDC Datasource to the Vocabulary

As in Scenario 1, we need to declare that we want to use an EDC Datasource.

In the Studio, open `Cargo.ecore` under `Scenario2` in the `Connecting_EDC` rule project.

Choose the Vocabulary menu command Add Datasource > Add EDC

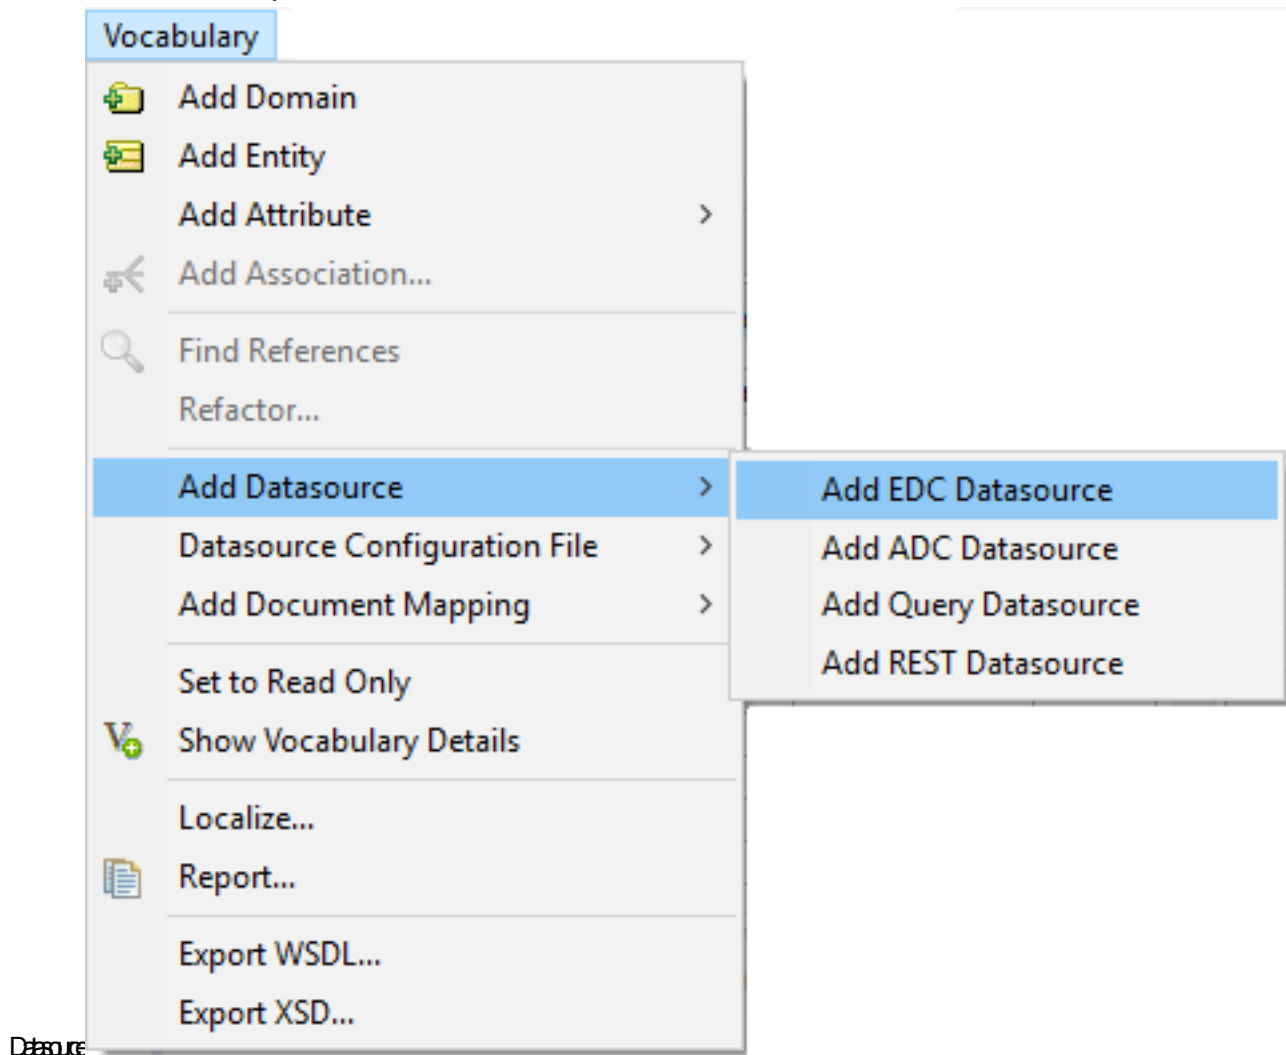

## Mapping the Vocabulary to the database

The next step is to map the Vocabulary to the database. This step consists of six substeps:

- Defining database connection properties
- Setting up entities for mapping
- Importing database metadata
- Manually mapping differently-named entity with tables
- Manually mapping differently-named attributes with columns
- Validating mappings

## Defining database connection properties

On the EDC tab, specify the following database connection properties:

- Database Server: Microsoft SQL Server 2014
- Database URL: jdbc:progress:sqlserver://localhost:1433;databaseName=Scenario2
- Username: sa

- Password: sqlserver2014password

Click CONNECTION Test. You see a message indicating that connection was successfully established.

## Setting up entities for mapping

As you did in Scenario 1, configure each entity to persist to the database by setting its Datastore Persistent property to Yes. Configure the Entity Identity property for each entity as follows:


- For Aircraft, choose tailNumber:
- For Cargo, choose manifestNumber as its entity identity.
- For FlightPlan, choose flightNumber as its entity identity.

The icons of the entities change to include a database icon, indicating that they are now configured to be stored in a database together with their attributes and associations.


## Importing database metadata

After you have configured the entities for database persistence and primary key, you can import the database's metadata. Doing this automatically maps matching entity and table names, and if an entity has been mapped to a table, it also automatically maps matching attribute and column names. Any differently-named entities and attributes will have to be mapped manually.


To import database metadata, click the EDC tab METADATA Import.

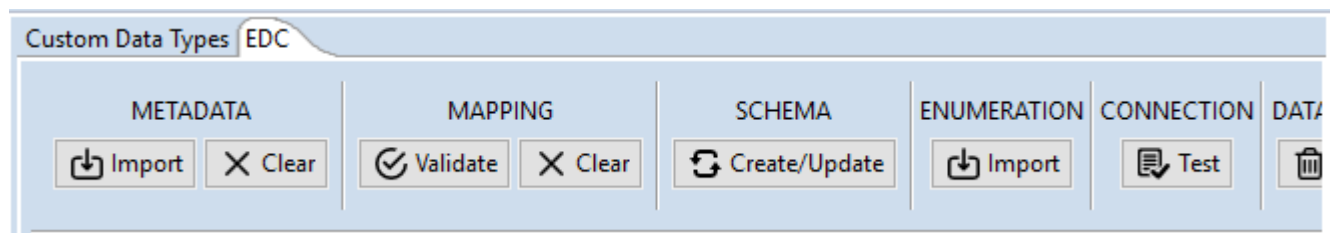

This opens the Import Database Metadata dialog box. In this dialog box, select Choose tables for database metadata import and click Next.

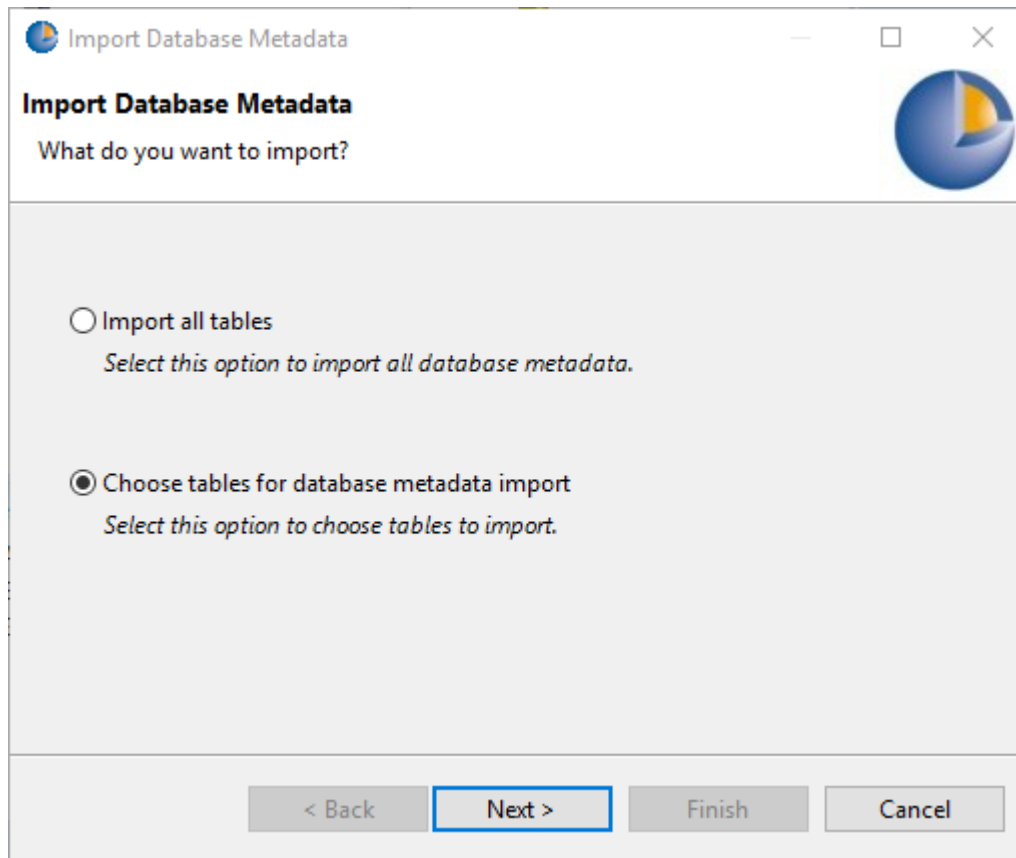


Next, you choose which tables to import. Click Deselect All and then scroll through the list of tables to locate `dbo.FlightPlan`, `dbo.Plane`, and `dbo.Shipment`. Select these tables and click Finish.

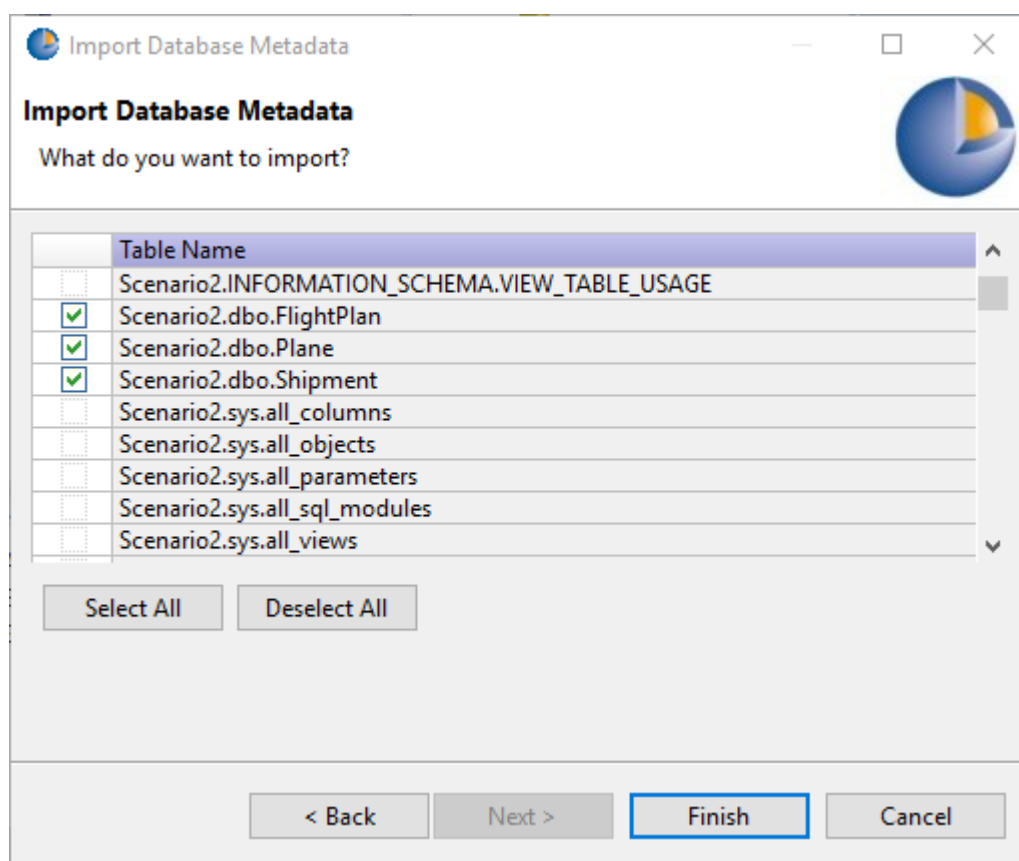

If all entity and attribute names have corresponding elements in the database with matching names, you would see a message indicating that the database metadata has been imported successfully.

However, if there are any differently-named entities (as in our example), the entity and its attributes will not get mapped automatically. You will see the following message:

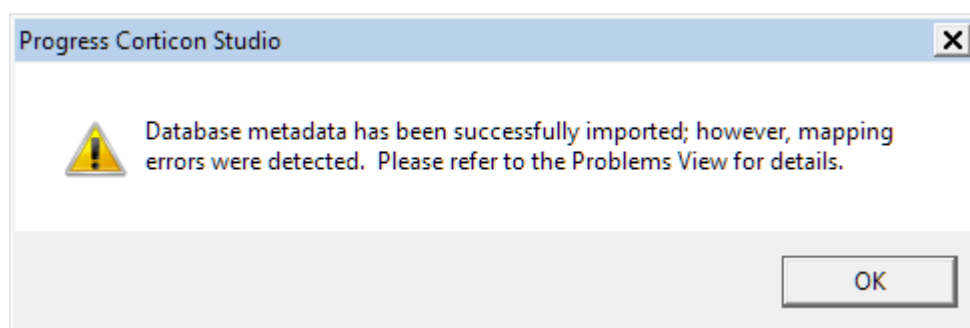

The Problems view shows which elements were not mapped automatically:

Properties Problems		
0 errors, 14 warnings, 0 others		
Description	Resource	Pat
Warnings (14 items)		
Association aircraft does not have a valid join expression.	Cargo.ecore	/Co
Association cargo does not have a valid join expression.	Cargo.ecore	/Co
Association flightPlan does not have a valid join expression.	Cargo.ecore	/Co
Association flightPlan does not have a valid join expression.	Cargo.ecore	/Co
No matching database column for attribute aircraftType could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute container could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute manifestNumber could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute maxCargoVolume could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute maxCargoWeight could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute tailNumber could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute volume could be found in imported metadata.	Cargo.ecore	/Co
No matching database column for attribute weight could be found in imported metadata.	Cargo.ecore	/Co
No matching database table for entity Aircraft could be found in imported metadata.	Cargo.ecore	/Co
No matching database table for entity Cargo could be found in imported metadata.	Cargo.ecore	/Co


## Mapping differently-named entities

Looking at the Problems from bottom to top, you see that no matching database table for two of the entities could be found in the imported metadata. A lot of the other problems derive from those problems, so we will map the mismatched entities manually.


Let's start with the Aircraft entity. Select the **Aircraft** entity and click on the **Table Name** drop-down. In the list of Scenario2 tables, select **Scenario2.dbo.Plane**:

The screenshot shows the EDC (Enterprise Decision Connector) interface. On the left, a tree view displays the 'Cargo' entity with its attributes: 'tailNumber\*', 'aircraftType', 'maxCargoVolume', 'maxCargoWeight', and 'flightPlan (FlightPlan)'. The 'Aircraft' entity is selected. On the right, the 'Basic Properties' panel is open, showing the 'Entity Name' as 'Aircraft'. Below this, the 'EDC Datasource Properties' panel is open, showing the 'Table Name' dropdown menu set to 'Scenario2.dbo.Plane'. Other properties like 'Entity Identity' (tailNumber), 'Datastore Persistent' (Yes), and 'Datastore Caching' are also visible.

Similarly, click Cargo and then click its Table Name drop-down. Select Scenario2.dbo.Shipment:

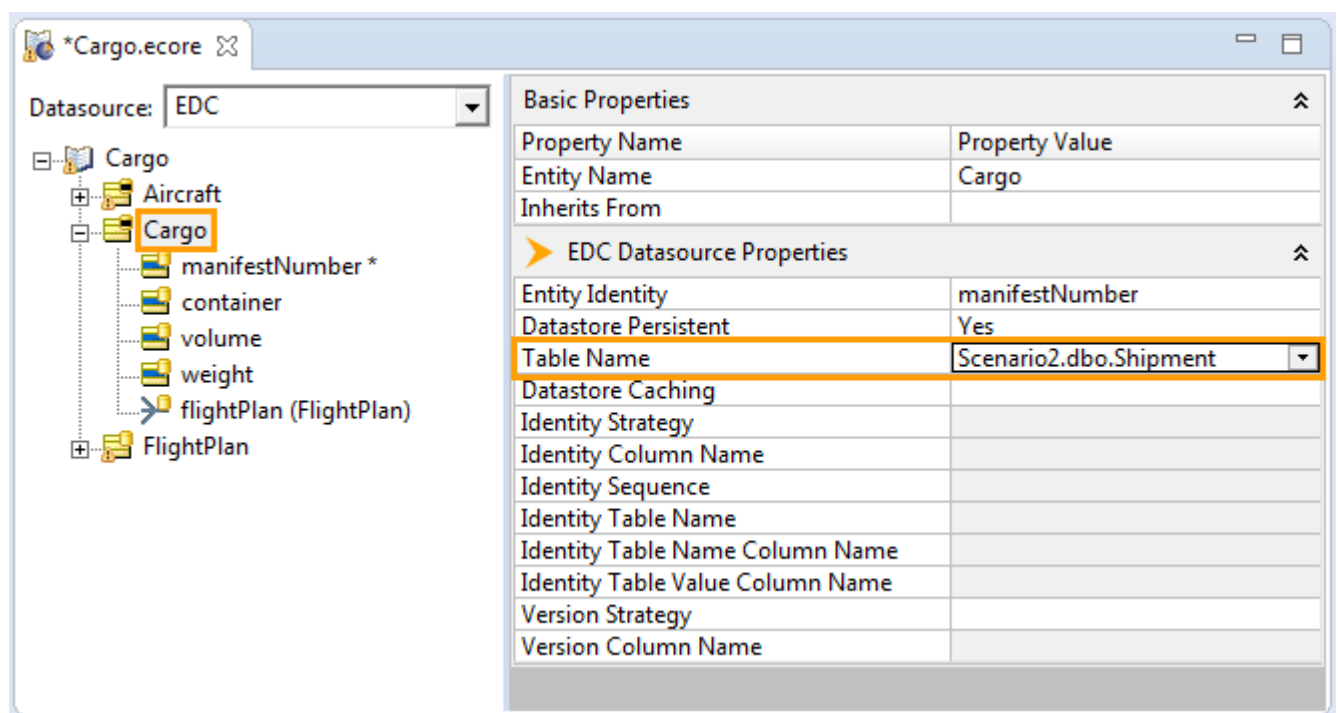

Before we correct the one remaining problem, let's take a closer look at the way that Vocabulary "decorations" provide information:

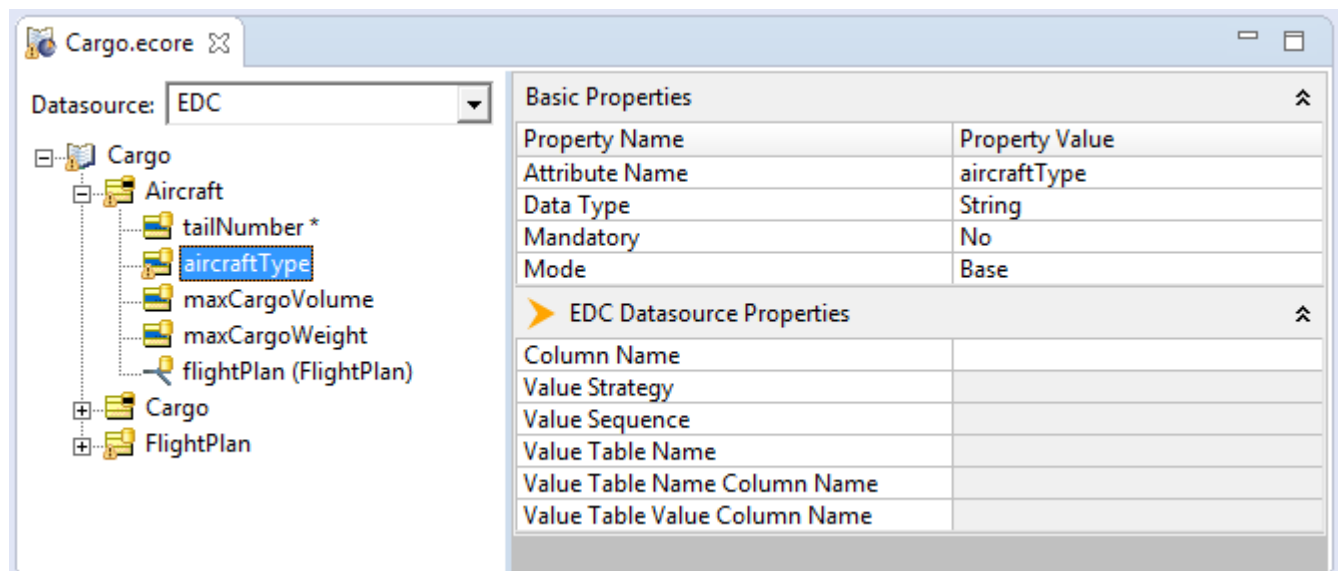


- All the entities and attributes have a database symbol in their upper right.
- The two entities we manually mapped have a black stripe in their database symbol.
- The attribute aircraftType has an alert marker in its lower left.

Save the Vocabulary file so that the problems are re-evaluated.

## Mapping differently-named attributes

All attributes that have a corresponding column with the same name get mapped automatically. However, any attribute that does not have a corresponding column with the same name will not get mapped.


Click aircraftType and then click on the Column Name property. In the list of choices, select planeType:

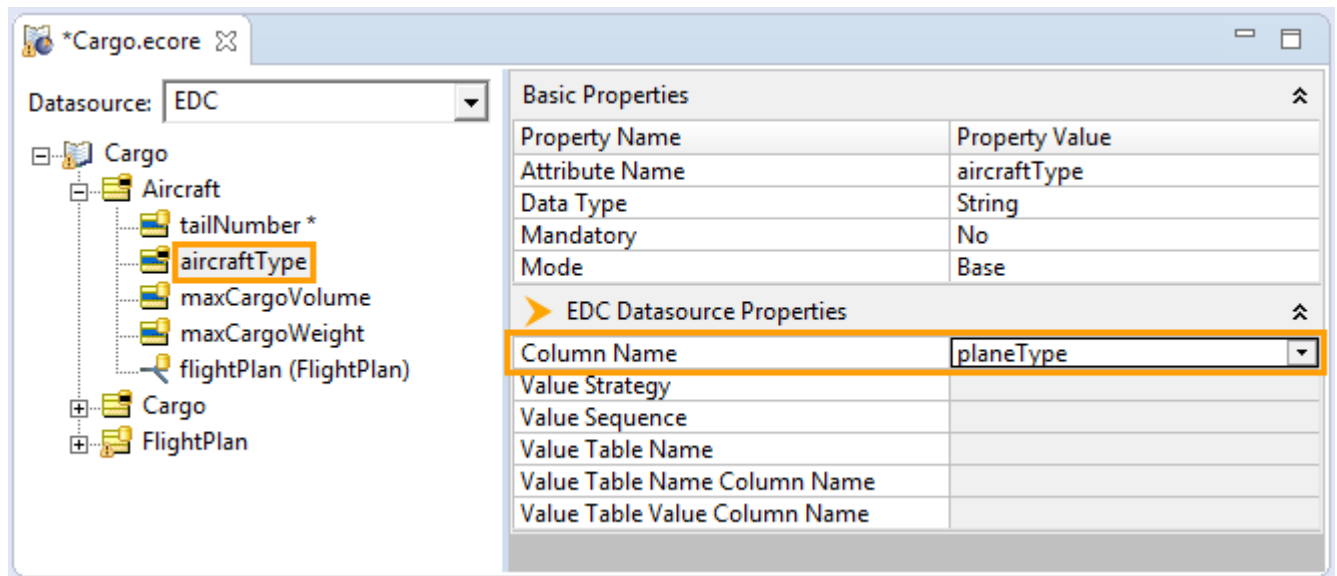

All elements in the Vocabulary are now mapped to the appropriate database element. Save the Vocabulary to show that the Problems view has no entries. Let's verify this by validating the mappings.

### Validating mappings

Select Vocabulary > Database Access > Validate Mappings. You should see a message indicating that no mapping errors were found:

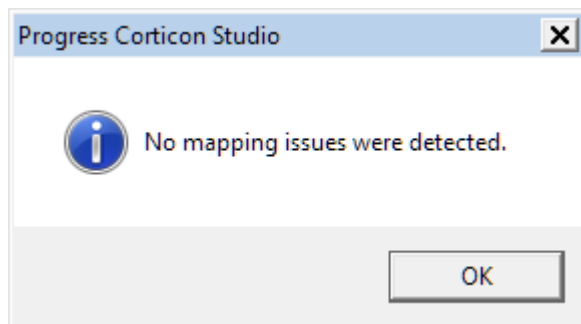

### Testing

Let's verify that Corticon rules that use the Cargo.ecore Vocabulary are able to access the Scenario2 database. Open AddRecord.ers in the Scenario2 folder. The Rulesheet assigns a value to Cargo.container based on the value of Cargo.weight received in input:



Corticon Designer - Connecting\_EDC/Scenario2/AddRecord.ers - Progress Developer Studio

File Edit Navigate Search Project Rulesheet Run Window Help

Project Explorer Rule Vocabulary

- Connecting\_EDC
  - Scenario1
    - Cargo.ecore
    - Sc1\_read.ers
    - Sc1\_read.ert
  - Scenario2
    - AddRecord.ers
    - AddRecord.ert
    - Aircraft\_addRecord.ers
    - Aircraft\_addRecord.ert
    - Cargo.ecore

Rule Operators

- General
- Attribute Operators
- Entity/Association Operators
- Extended Operators

\*AddRecord.ers

Conditions	0	1	2
a Cargo.weight		< 100000	100000..200...
b			
c			
d			
e			
f			
g			
h			

Actions	Post Message(s)		
A Cargo.container		'STANDARD'	'HEAVY'
B			
C			
D			
E			
F			
G			
Overrides			

Rule Statements Rule Messages


Ref	ID	Post	Alias	Text

Properties Problems Error Log

0 items

Description


AddRecord.ert in the Scenario2 folder. The Ruletest has one Cargo entity instance in input:

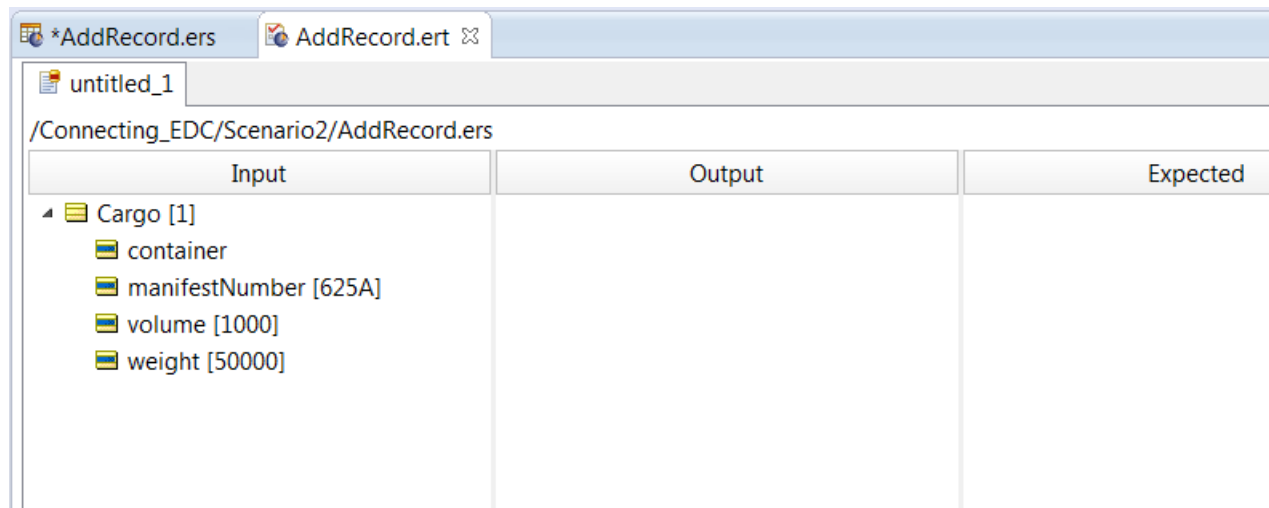

Input	Output	Expected
Cargo [1] <ul style="list-style-type: none"> <li>container</li> <li>manifestNumber [625A]</li> <li>volume [1000]</li> <li>weight [50000]</li> </ul>		


For a Ruletest to perform read/write operations on the database, it must be configured to do so. Verify that the Ruletest's database access setting is set to Read/Update by selecting Ruletest > Testsheet > EDC Database Access. There should be a checkmark next to Read/Update.

Run the Ruletest. You should see the following output:

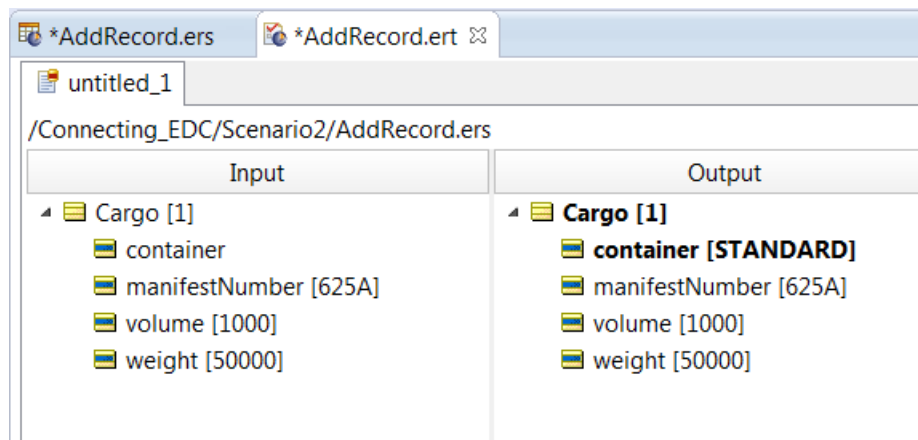

Input	Output
Cargo [1] <ul style="list-style-type: none"> <li>container</li> <li>manifestNumber [625A]</li> <li>volume [1000]</li> <li>weight [50000]</li> </ul>	Cargo [1] <ul style="list-style-type: none"> <li><b>container [STANDARD]</b></li> <li>manifestNumber [625A]</li> <li>volume [1000]</li> <li>weight [50000]</li> </ul>

The value of the container attribute has changed, indicating that the entity instance has been processed by the AddRecord.ers Rulesheet. Let's verify that a record corresponding to the Output has been added to the Shipment table (since Cargo is mapped to Shipment). In SQL Server Management Studio, right-click dbo.Shipment and select Select Top 1000 Rows:

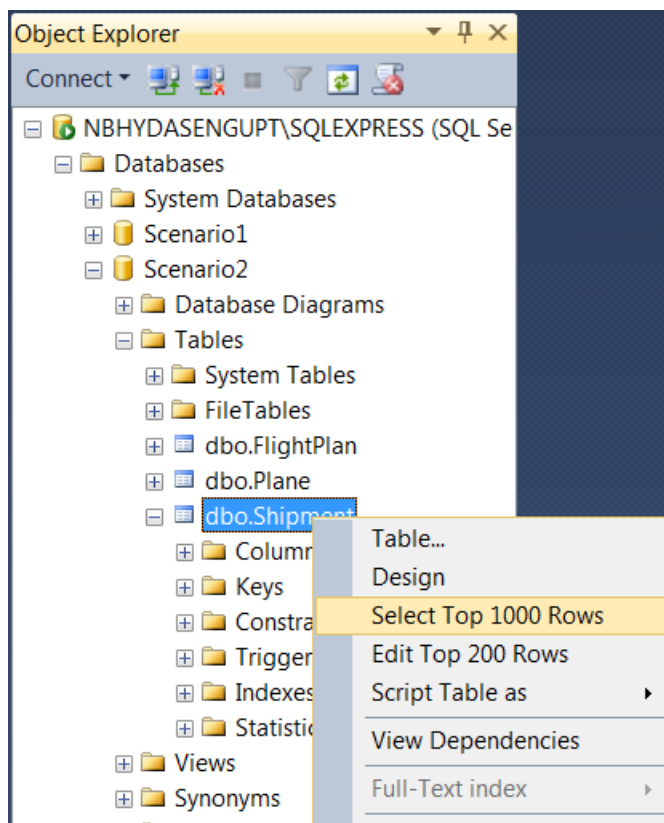

You see one record in the Results that corresponds to the Cargo entity instance in the Ruletest's output:

Results					
	container	manifestNum...	volu...	weight	flightNum...
1	STANDARD	625A	1000	50000	NULL


This illustrates how differently named entity/table elements (Cargo vs Shipment) work when mapped.

Let's verify that differently named attributes/columns work just as seamlessly too. Open Aircraft\_addRecord.ers in the Scenario2 folder:

Aircraft_addRecord.ers				
Conditions		0	1	2
a	Aircraft.aircraftType		'747'	'777'
b				
c				
d				
e				
f				
g				
h				
Actions				
Post Message(s)				
A	Aircraft.maxCargoWeight		100000	150000
B				200000

The Rulesheet assigns a value to Aircraft.maxCargoWeight based on the value of Aircraft.aircraftType received in input. As you may remember, the Aircraft entity is mapped to the Plane table, while the aircraftType attribute is mapped to a planeType column in the database.


Open Aircraft\_addRecord.ert in the Scenario2 folder:

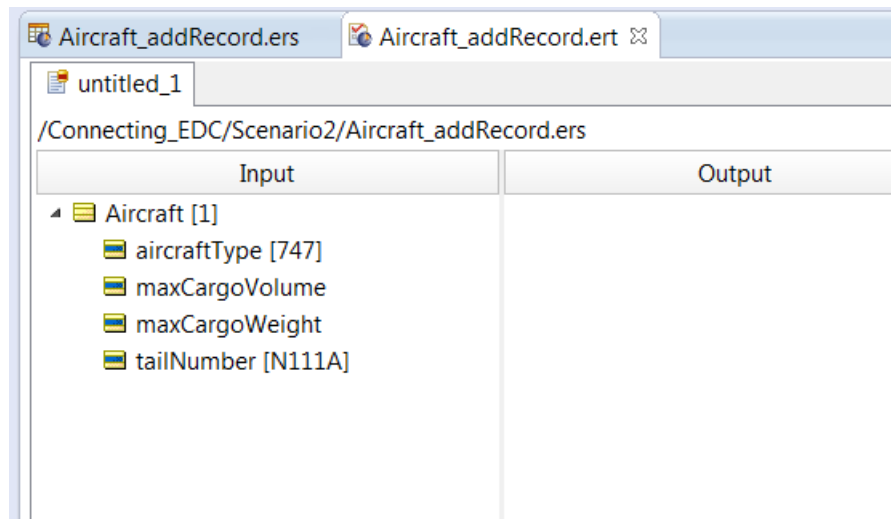

The Ruletest contains one Aircraft entity instance in input. The aircraftType is set to 747.


Let's ensure that the Ruletest is configured to perform read/write operations on the database. Select Ruletest > Testsheet > EDC Database Access. There should be a checkmark next to Read/Update.

Run the Ruletest. You should see the following output:

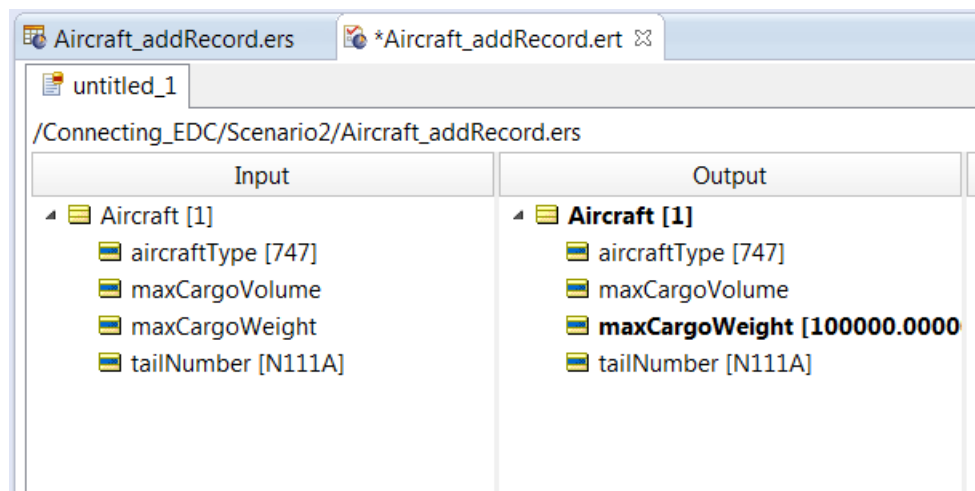

As you can see, the value of the maxCargoWeight attribute has changed. Let's verify that a new record has been added in the Plane table.

In SQL Server Management Studio, right-click dbo.Plane and select Select Top 1000 Rows:

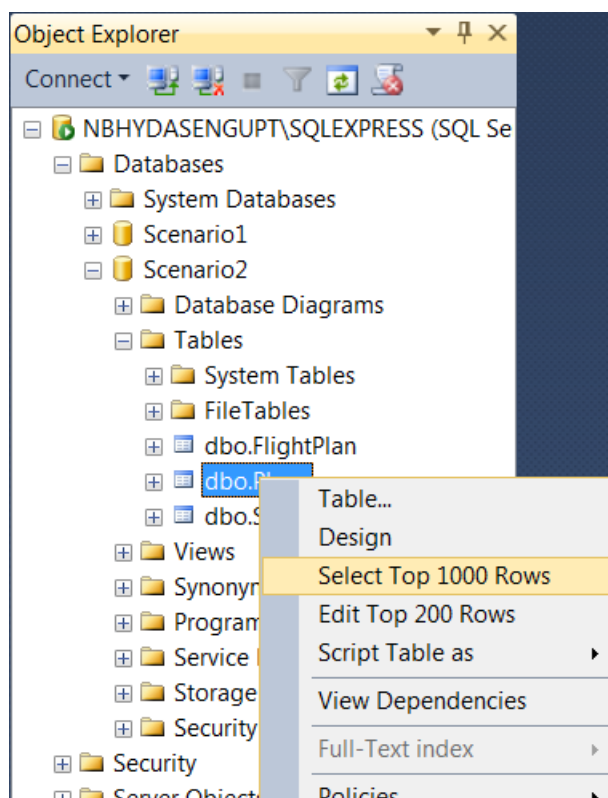

You should see one record in the results area corresponding to the Ruletest's output:

Results				
	planeTy...	maxCargoVolu...	maxCargoWei...	tailNumb...
1	747	NULL	100000	N111A

The aircraftType attribute is represented through the planeType column in the dbo.Plane table. The values of other columns are also correctly populated based on the Ruletest's output.

You have now successfully mapped a Vocabulary to a database in two ways—by generating a database schema from an existing Vocabulary and by mapping an existing Vocabulary to an existing database schema.



## Deploying a Decision Service that accesses a database

---


As an integration developer, you are responsible for deploying a Ruleflow as a Decision Service on Corticon Server. During deployment, if your Decision Services will access a database, you need to configure database access settings. Once that is done, the deployed Decision Service will automatically access the database.

In this section of the tutorial, you will deploy the Ruleflow (named Test\_Ruleflow) that is part of the Scenario2 folder in the Connecting\_EDC rule project.

There are different ways to deploy a Ruleflow as a Decision Service on Corticon Server. The recommended way is to package the Ruleflow into an EDS file and then deploy the EDS file on Corticon Server using its Corticon Web Console. You configure deployment settings (including database access settings) in the Web Console.

### Packaging the Ruleflow into an EDS file


Let's start by packaging the Ruleflow in Corticon Studio. Open the Test\_Ruleflow.erf file.

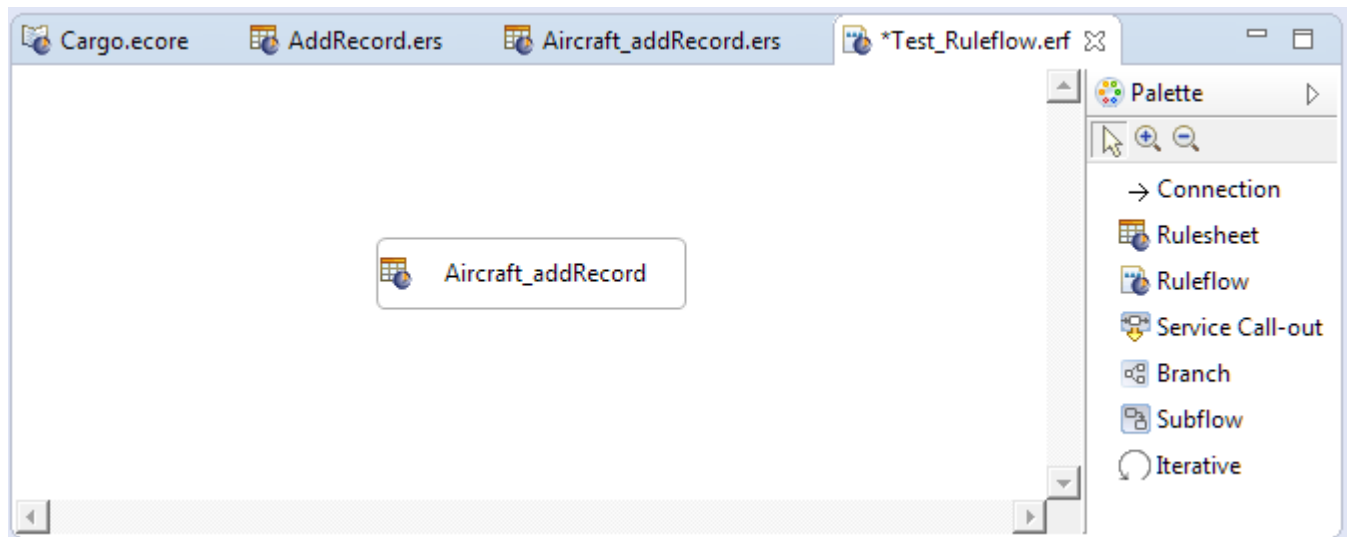

The Ruleflow has just one Rulesheet—Aircraft\_addRecord—which you used in the previous section.


Let's package this Ruleflow into an EDS file. When we do this, the Ruleflow, the Rulesheet that it contains, and the Vocabulary all get compiled into a package that can be deployed on Corticon Server.

To package the Ruleflow, select **Project > Package and Deploy Decision Services**.

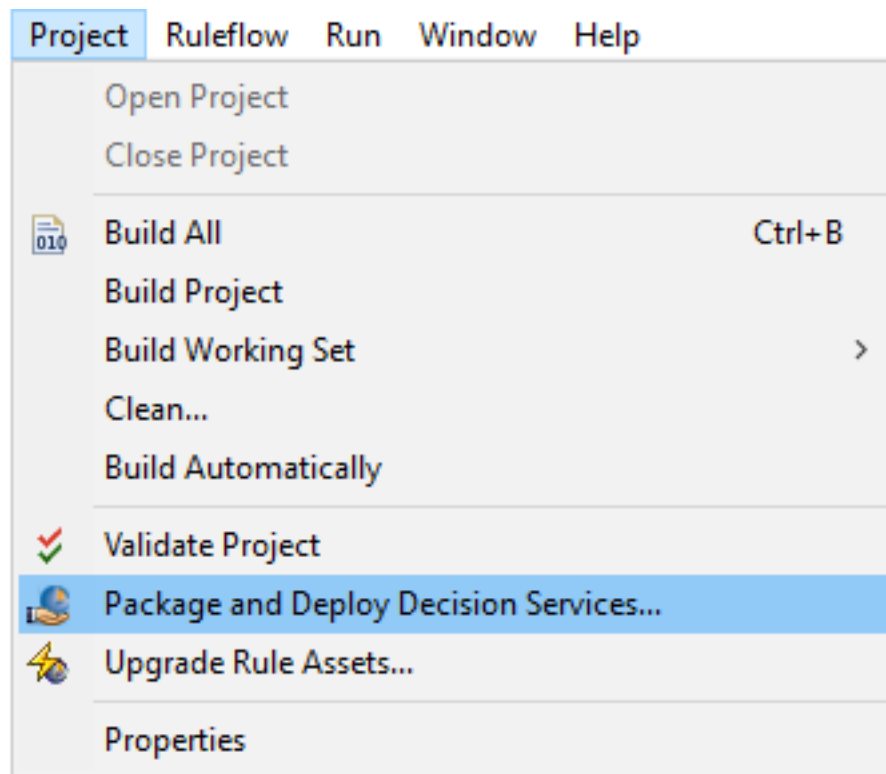


In the Deployment Target window, choose **Package** and save for later deployment and click **Next**.



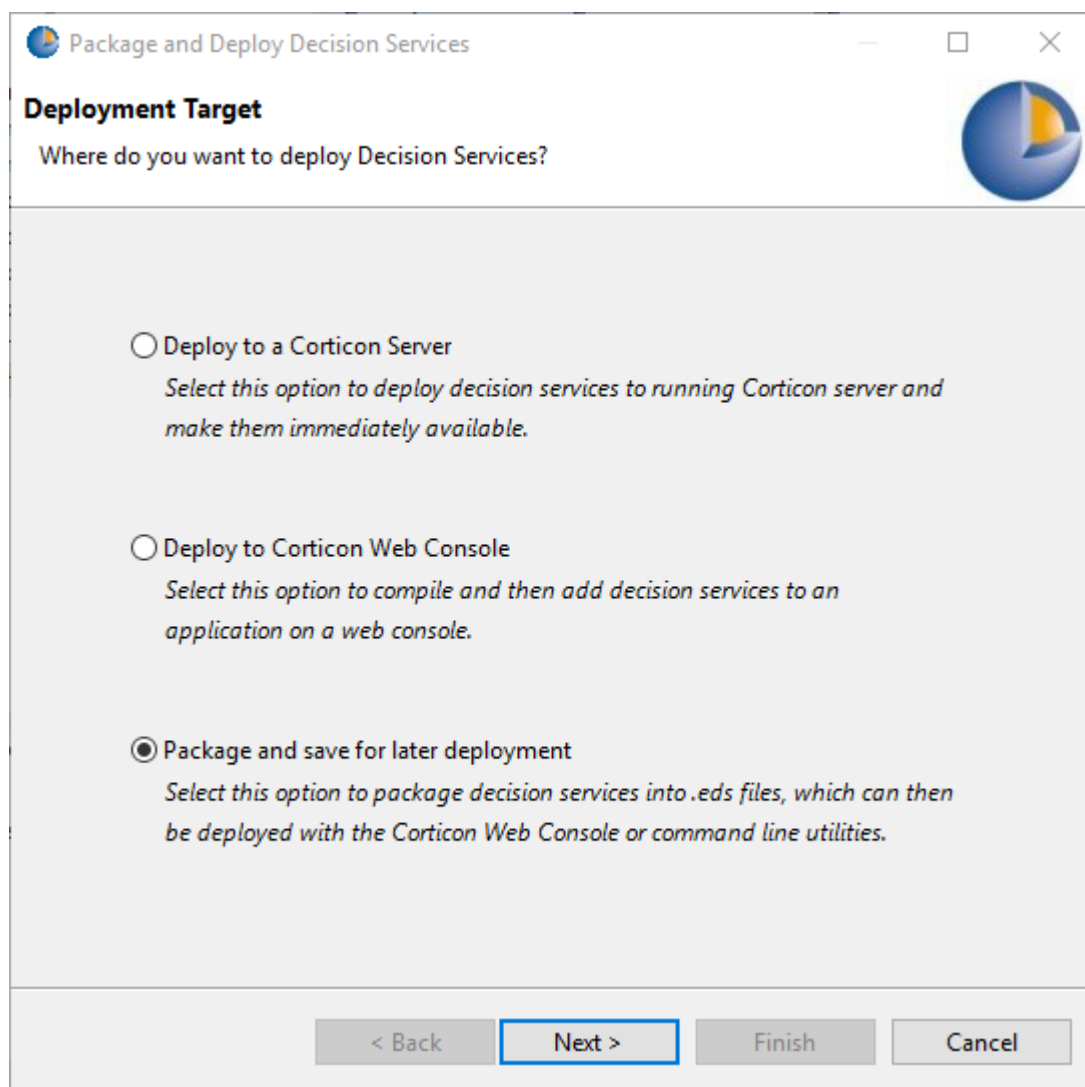


In the Package Ruleflows screen:

- Select Test\_Ruleflow.
- Choose **Read/Update** in the **Database Mode** drop-down.
- Choose a location to save the EDS file by clicking the **Browse** button. (It is always good practice to save it in the same folder as the Ruleflow.)
- Click Finish.

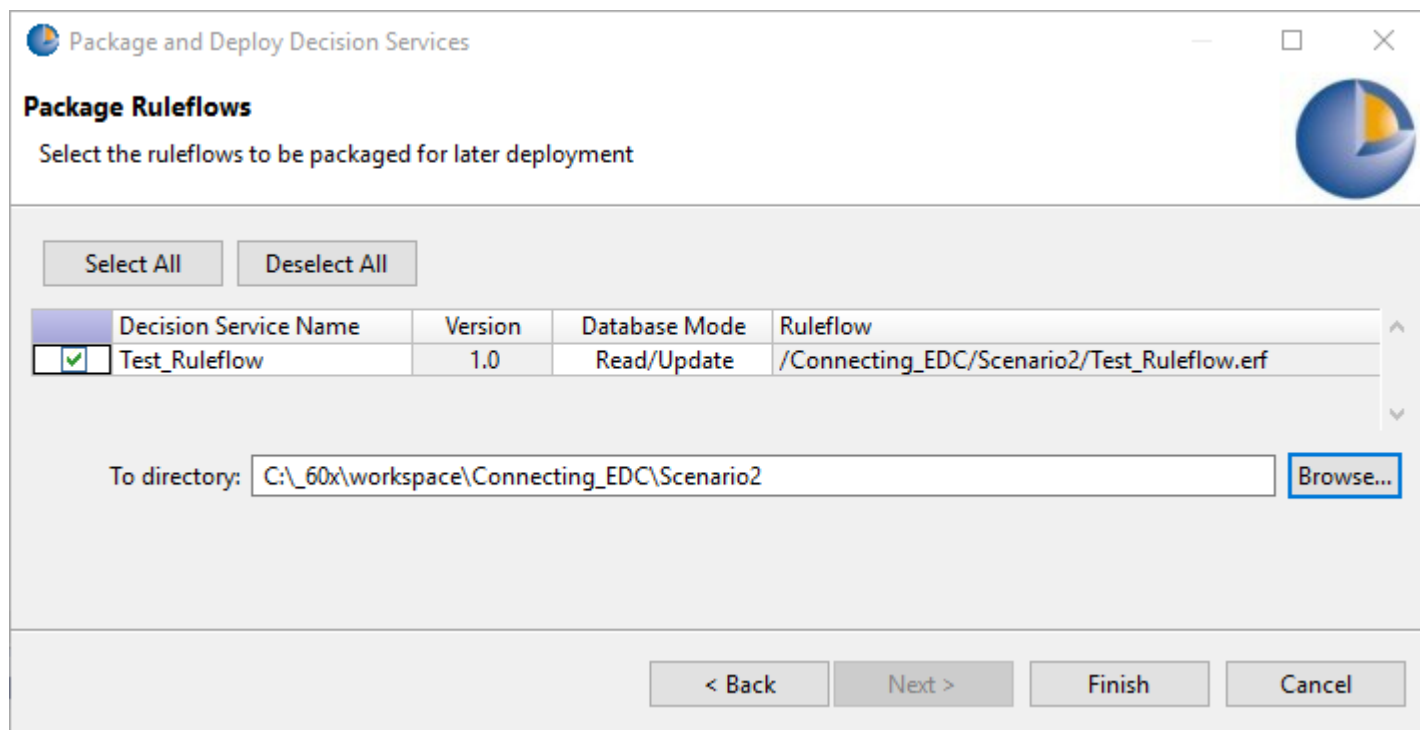


You see a message indicating that the Ruleflow was successfully compiled into an EDS file and saved in the location you specified.

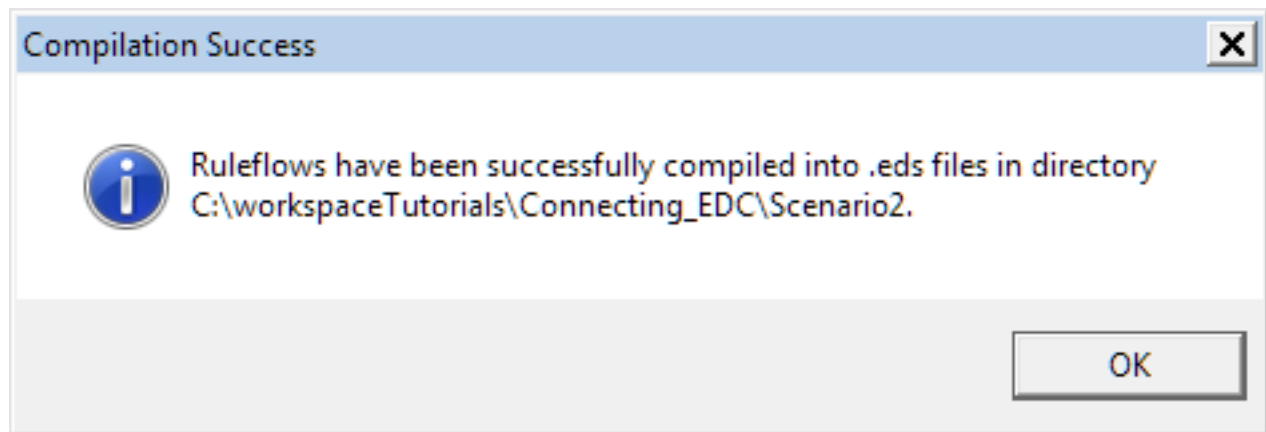

## Exporting the Datasource configuration file

As part of deploying the Ruleflow as a Decision Service, you need to supply a configuration file containing information about the database connection. The best way to create the file is to export the properties from Corticon Studio and modify them for your production environment.

Export the database properties by opening the Cargo.ecore Vocabulary in the Scenario2 folder and selecting **Vocabulary > Datasource Configuration File > Export**.

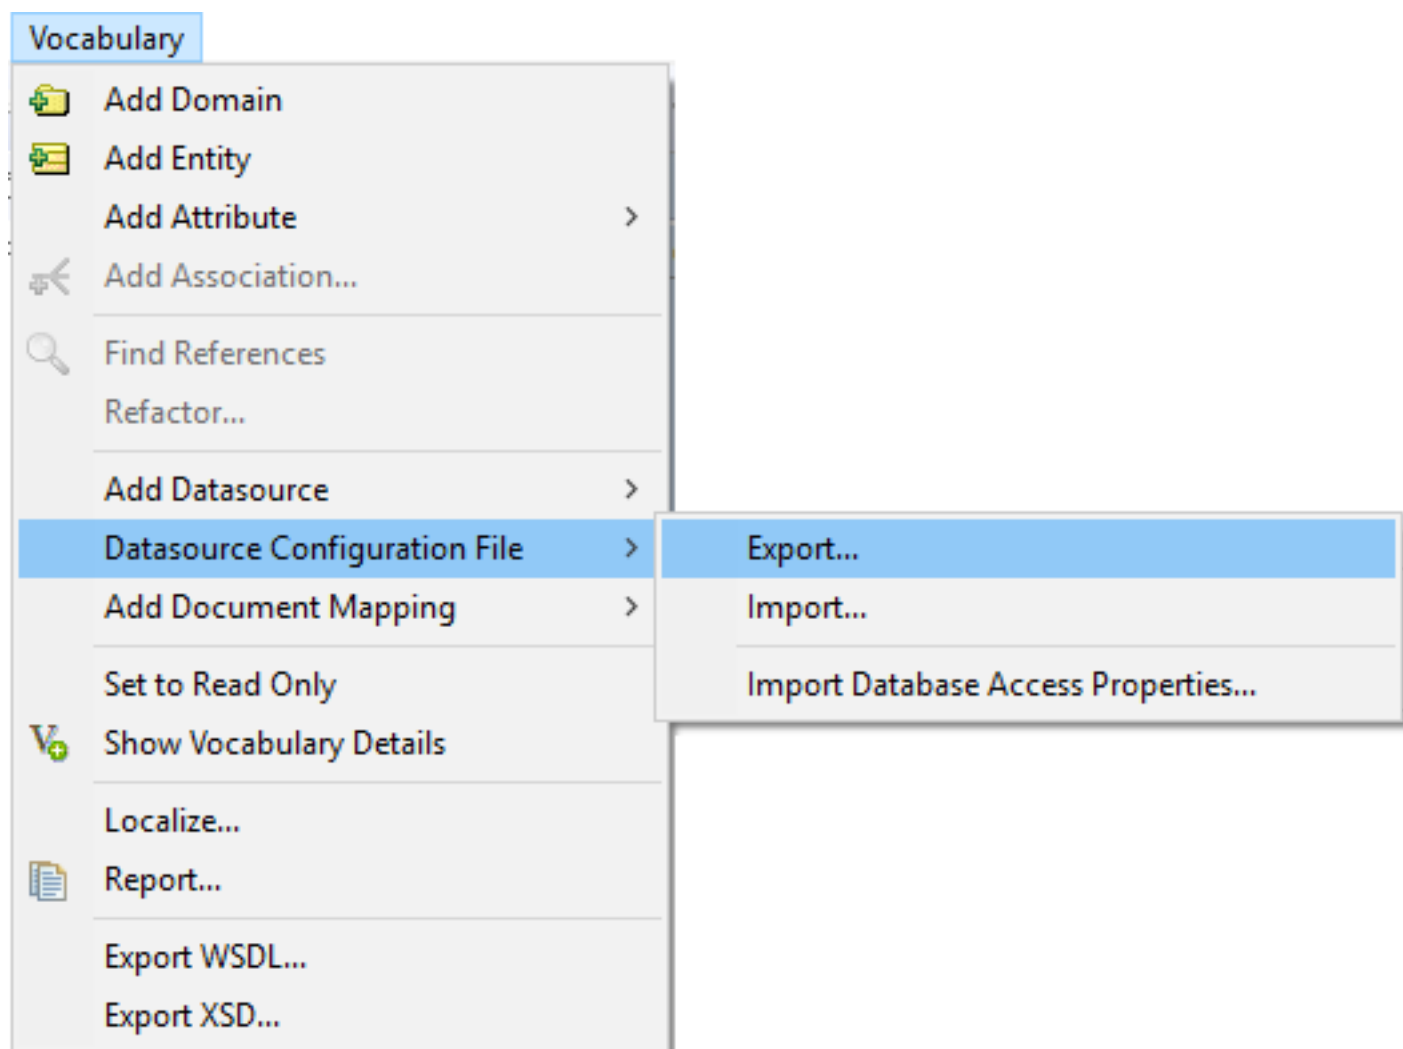

In the **Save As** dialog box, select a location where you want to save the XML file, give it a name such as **Scenario2\_Datasource.xml**. (It is always good practice to save it in the same folder as the Decision Service file. Click Save.

In this tutorial, you will use the same SQL Server database to simulate the production environment, so you do not need to modify the database connection properties in the properties file.

## Installing Corticon Server

You'll install Corticon Server for Java so that you can deploy the Decision Service to it. We'll use the Corticon Web Console to do the deployment so you will install that component as well.

1. Download **PROGRESS\_CORTICON\_6.0\_SERVER\_WIN\_64.exe**
2. Double-click the installer executable. The installation wizard opens.
3. On the **Introduction** page of the installation wizard, click **Next**.
4. On the **License Agreement** page, read, understand, and agree to the terms, then select **I accept the terms of the License Agreement**, and then click **Next**.
5. On the **Corticon Server Install and Work Directory**, retain the default settings, and then click **Next**.
6. On the **Choose Server Components** page, select **Corticon Server for Java** and **Corticon Web Console**, and then click **Next**.



7. On the **Corticon Server Instance and Port Numbers** page, accept the default settings, and then click **Next**.
8. On the Pre-Installation Summary page, click **Install**.
9. Wait for a few minutes for the installation to complete. Then, on the **Install Complete** page, click **Done**.

## Starting Corticon Server

On the Start menu, choose **Progress > Corticon 6.0 Server**.

This launches a command console. Corticon Server takes a few minutes to start the first time. When it is running, you are informed of Server startup:

```

Tomcat
Bucket-type-1::corticon (generated) ran successfully in 0ms
2019-06-28 12:20:03,942 [main] INFO liquibase - ChangeSet modify-monitoredAttribute-ana
Bucket-type-2::corticon (generated) ran successfully in 0ms
2019-06-28 12:20:03,958 [main] INFO liquibase - ChangeSet update-deployed-in-application
corticon (generated) ran successfully in 0ms
2019-06-28 12:20:03,958 [main] INFO liquibase - Successfully released change log lock
28-Jun-2019 12:20:06.246 INFO [main] org.apache.catalina.startup.HostConfig.deployWAR Dep
e [C:\Progress\Corticon 6.0\Server\tomcat\webapps\corticon.war] has finished in [37,724] m
28-Jun-2019 12:20:06.247 INFO [main] org.apache.catalina.startup.HostConfig.deployDirector
ctory [C:\Progress\Corticon 6.0\Server\tomcat\webapps\ROOT]
28-Jun-2019 12:20:06.268 INFO [main] org.apache.catalina.startup.HostConfig.deployDirector
directory [C:\Progress\Corticon 6.0\Server\tomcat\webapps\ROOT] has finished in [21] ms
28-Jun-2019 12:20:06.271 INFO [main] org.apache.coyote.AbstractProtocol.start Starting Pro
28-Jun-2019 12:20:06.282 INFO [main] org.apache.coyote.AbstractProtocol.start Starting Pro
28-Jun-2019 12:20:06.287 INFO [main] org.apache.catalina.startup.Catalina.start Server sta

```


---

## Deploying the Decision Service using the Web Console


The Corticon Web Console lets you deploy and then monitor your Decision Services.

Launch the Web Console by selecting **Start Progress > Corticon 6.0 Web Console**.

The Web Console login page opens. Enter admin/admin in the User Name/Password fields and click **Log in**.

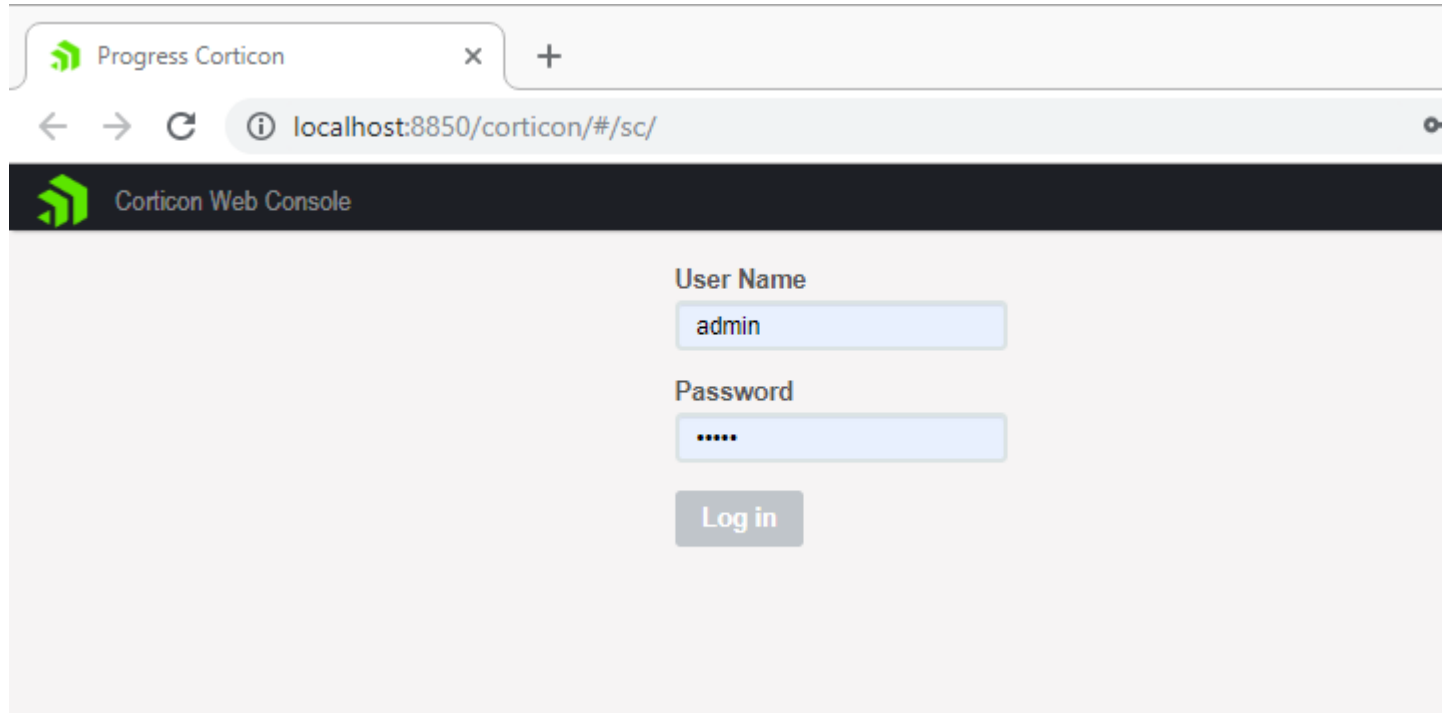


The Web Console Home page opens. Click on **Manage Decision Services**.

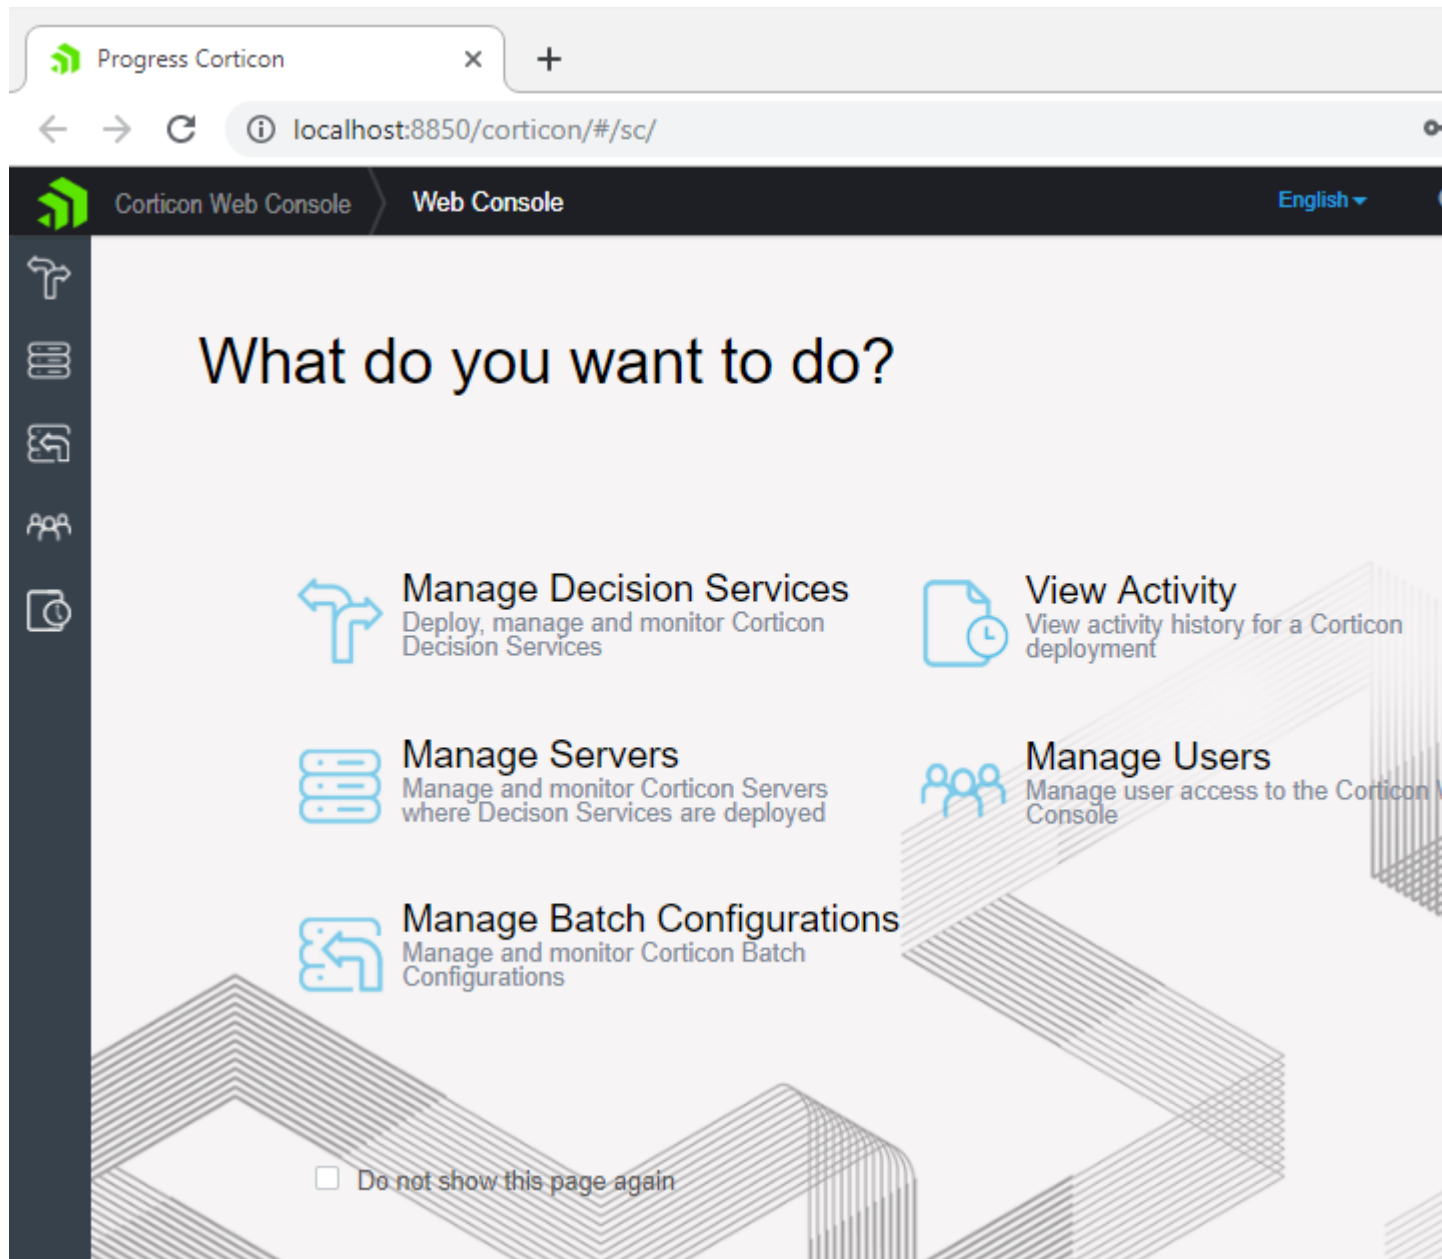

On the Decision Services page, click + Add Decision Service.

In the options panel, choose Add a new Decision Service.

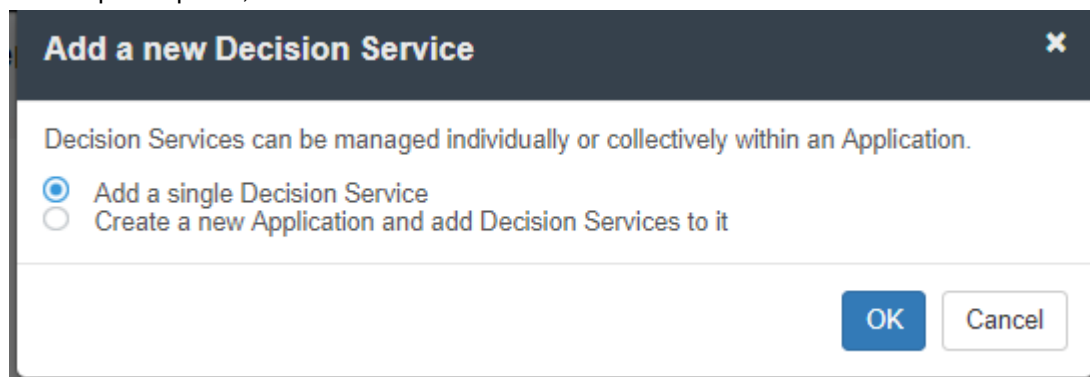

The Add Decision Service dialog box opens on its Decision Service tab:

**Add Decision Service**

Decision Service   DataSource   Advanced   Monitored Attributes

When adding a Decision Service you must specify a name, select a server and provide the EDS file of the Decision Service. Other properties are optional. To add the Decision Service to an existing Application select "Add to an Existing Application"

**Name**  
Test\_Ruleflow

**Description**

**EDS File** Choose File...  
Test\_Ruleflow\_v1\_0.eds

**Servers**  
local server ▼

☐ Add to an Existing Application

Save   Save & Deploy   Cancel

On the **Add Decision Service** dialog box:

1. In the **Name** field, enter **Test\_Ruleflow** as the name for the Decision Service.  
In the EDS File section, click Choose File. In the window that opens, navigate to the location where you saved the EDS file, Test\_Ruleflow\_v1.0.eds, and then click Open.
2. On the **Select Servers** pulldown, choose **local server**.
3. Click the **DataSource** tab. Do the following:
  - In the **Datasource Configuration File** section, click **Choose File**.
  - In the window that opens, navigate to the location where you saved the EDS file, **Scenario2\_Datasource.xml**, and then click **Open**.
  - In the **EDC Access Mode** section, click **Read/Update**.
4. Click **Save and Deploy**.

The Decision Service is successfully deployed. The green checkmark next to the Application name shows that it properly deployed onto the local server:

The screenshot shows the Corticon Web Console interface. The browser address bar indicates the URL is `localhost:8850/corticon/#/sc/decisionServices/1/1/view`. The console header shows 'Corticon Web Console' and 'Decision Services'. The main content area displays the 'Decision Service : Test\_Ruleflow v1.0' page, which includes a green checkmark indicating successful deployment. The page is organized into several sections:

- General**: Contains deployment details.
 

Servers:	local server	Execution Count:	0
Deployed:	Jul 17, 2019 4:21:59 PM	Failure Count:	0
Effective:		Average Time:	0 m
Expires:		Rule Count:	3
Auto Reload:	Yes	Last Execution Time:	No
Maximum Pool Size:	1		
Message Style:	Auto-detect		
- Decision Service Statistics**: A section for monitoring service performance.
- File**: Contains file information.
 

Local File:	Test_Ruleflow_v1_0.eds
EDS File Timestamp:	Jul 17, 2019 4:21:54 PM
- DataSource**: A section for configuring data sources.
- Rule Messages Restrictions**: A section for configuring message restrictions.
- History**: A section for viewing the service history.

## Testing

Finally, let's test the deployed Decision Service. One way to test it is to use a Ruletest in Corticon Studio and select the Decision Service as its Test Subject.



Recall that the Decision Service has just one Rulesheet—Aircraft\_addRecord.ers—which checks an Aircraft entity instance's aircraftType, assigns a value to the instance's maxCargoWeight attribute, and then adds the instance as a new Aircraft record if a new primary key value is supplied in the tailNumber attribute.


To begin with, let's look at the existing Aircraft records. In SQL Server Management Studio, right-click dbo.Plane in the Scenario2 database and select Select Top 1000 Rows. As you can see there is just one record:

	planeTy...	maxCargoVolu...	maxCargoWei...	tailNumb...
1	747	NULL	100000	N111A


By running the Ruletest, you will verify that when you supply input data with a different primary key value to the Decision Service, a new record is added to this table.

In Corticon Studio, create a new Ruletest named Test\_DecisionService as follows:

1. Right-click the **Scenario2** folder and select **File > New > Ruletest**:

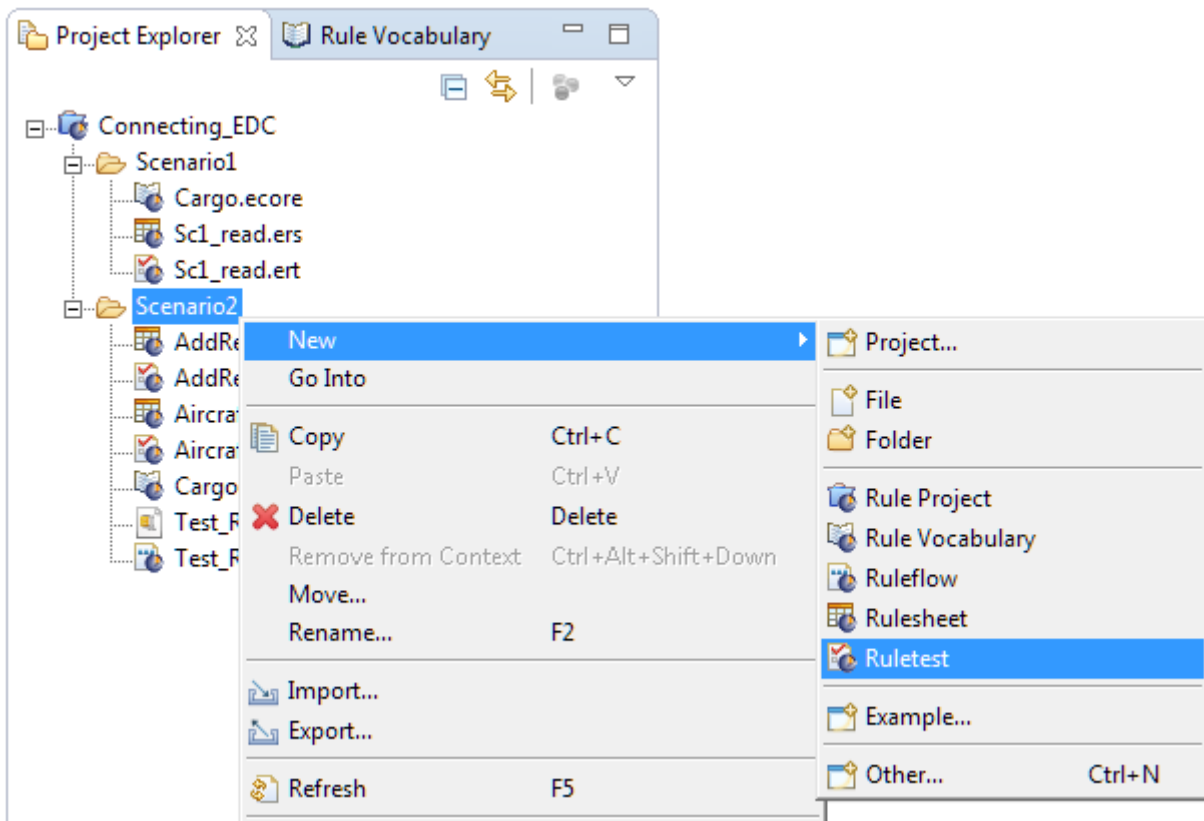

2. In the **Create New Ruletest** wizard, enter **Test\_DecisionService** in the **File name** field, and then click **Next**.

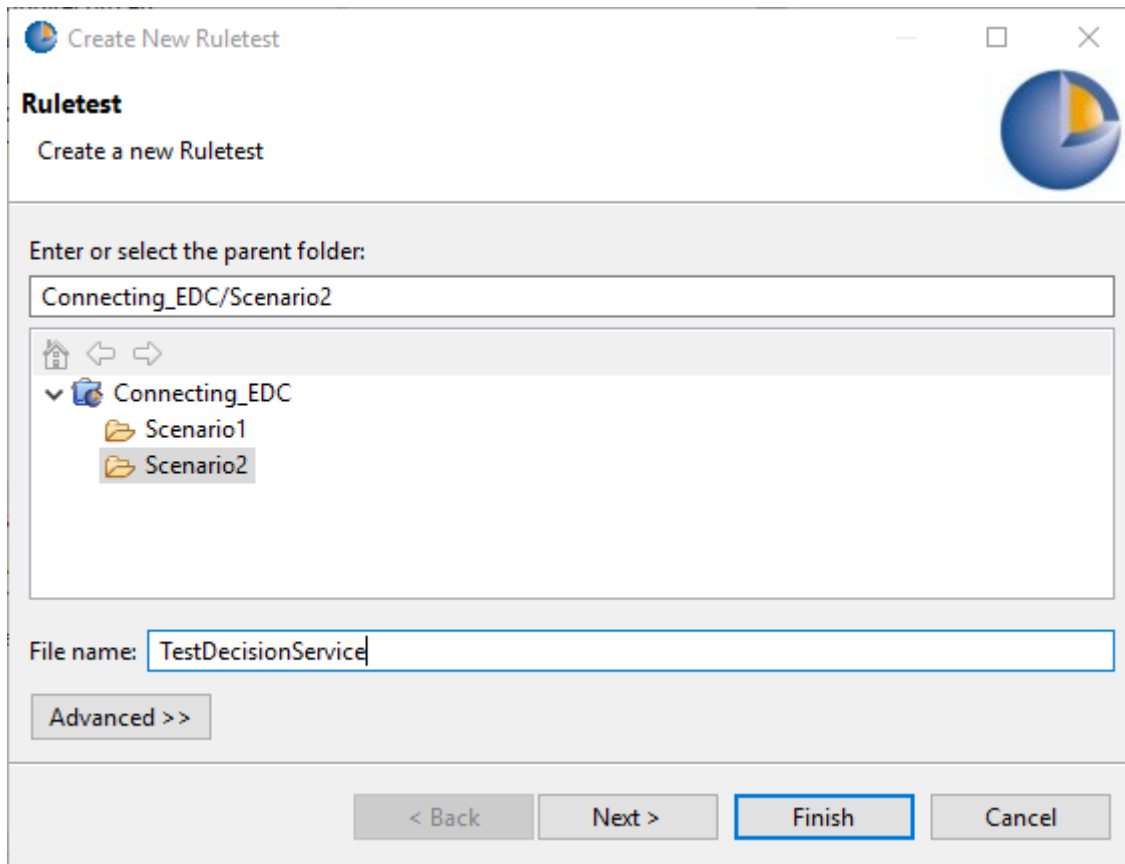

3. On the Select Test Subject page:
4. Select the Run against Server tab.
5. Select the Corticon Server URL (<http://localhost:8850/axis>) from the **Server URL** drop-down.
6. Click the **Refresh** button next to **Decision Services**.
7. Select Test\_Ruleflow in the Decision Services section.
8. Click **Next**.

Create New Ruletest

**Ruletest**

Select Test Subject

Run in Studio Run against Server

Server URL:  
http://localhost:8850/axis

Credentials are required if authentication is enabled on Server:  
Username: Password:

Decision Services:  
Refresh

Name	Major	Minor	Effective Start Date	Effective Stop Date
Test_Ruleflow	1	0		

< Back Next > Finish Cancel

9. On the **Select Vocabulary** page, ensure that **Cargo.ecore** in the **Scenario2** folder is selected, and then click **Finish**.

Create New Ruletest

**Ruletest**

Select Vocabulary


Scenario1  
Scenario2  
Cargo.ecore

< Back Next > Finish Cancel

The Ruletest is now configured. The Test Subject in the Ruletest (highlighted in the image below) should point to the Test\_Ruleflow Decision Service. Drag and drop an Aircraft entity instance from the Rule Vocabulary view to the Input pane and define the following values:


- aircraftType = 777

- tailNumber = N222B (which is unique)

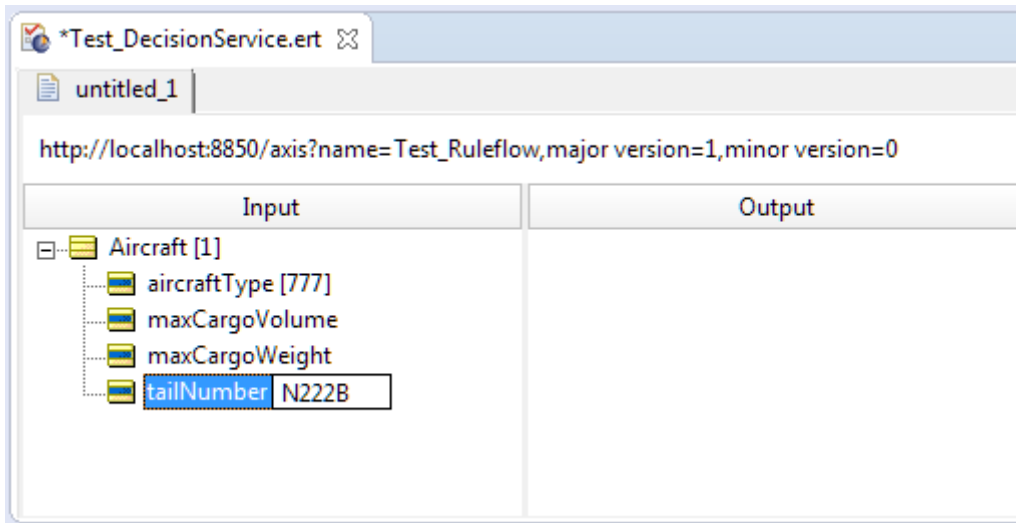

Since this Ruletest invokes a Decision Service on Corticon Server, you do not need to configure its database access setting.

Run the Ruletest. You see the following output:

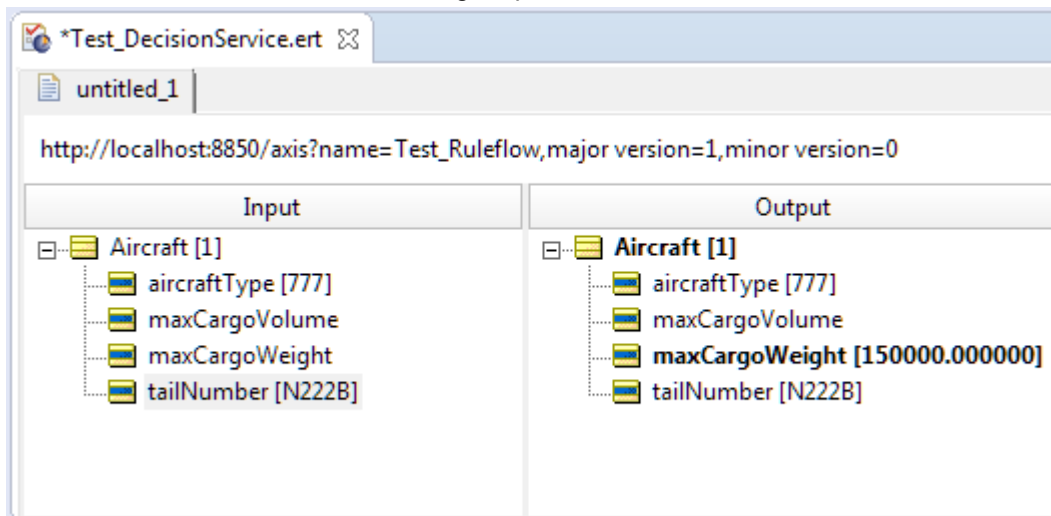

Let's verify that a new record has been added to the dbo.Plane table based on the Output of this Ruletest. In SQL Server Management Studio, right-click dbo.Plane in the Scenario2 database and select Select Top 1000 Rows. You see the new row was added to the database table:

	planeTy...	maxCargoVolu...	maxCargoWei...	tailNumb...
1	747	NULL	100000	N111A
2	777	NULL	150000	N222B

Our Decision Service running on the Corticon Server accessed and wrote to the database.

Congratulations! You have now mapped a Vocabulary to a database and deployed a Ruleflow as a Decision Service on Corticon Server that can read and write to a database.