



Aspera Server

Deployment Guide

UPDATED: 27 July 2023

Copyright Notices

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
2 Aspera Server Template	5
3 Architecture	6
4 Configure Aspera Server Virtual Services	7
4.1 Enable Subnet Originating Requests Globally	7
4.2 Create the Aspera Virtual Services	8
4.2.1 Aspera HTTPS Virtual Service	8
4.2.2 Aspera HTTPS-Failback Virtual Service	10
4.2.3 Aspera FASP UDP Virtual Service	11
4.2.4 Aspera FASP Virtual Service	13
4.3 Port Following	14
4.3.1 Configure Port Following for the Aspera TCP Virtual Service	14
4.3.2 Configure Port Following for the Aspera TCP Virtual Service	15
References	17
Last Updated Date	18

1 Introduction

The Aspera Server enables a large number of users to exchange files over a Wide Area Network (WAN). Utilising FASP® technology at its core, the Aspera Server delivers unmatched performance and includes all the exceptional transfer and user management capabilities of the industry standard Enterprise Server and Connect Server.

The Kemp LoadMaster is able to load balance the Aspera Server workload. The LoadMaster offers advanced Layer 4 and Layer 7 server load balancing, SSL Acceleration and a multitude of other advanced Application Delivery and Optimization (ADC) features. The LoadMaster intelligently and efficiently distributes user traffic among the application servers so that users get the best experience possible.

1.1 Document Purpose

This document provides guidance on how to deploy Aspera Server with a Kemp LoadMaster. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined.

The Kemp support site can be found at: <https://support.kemptechnologies.com>.

1.2 Intended Audience

This document is intended for use by anyone deploying Aspera Server with a Kemp LoadMaster.

2 Aspera Server Template

Kemp has developed a template containing our recommended settings for Aspera Server. This template can be installed on the LoadMaster and used when creating Virtual Services. Using a template automatically populates the settings in the Virtual Services. This is quicker and easier than manually configuring each Virtual Service. If needed, changes can be made to any of the Virtual Service settings after using the template.


Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#).

For steps on how to manually add and configure each of the Virtual Services, refer to the **Configure Aspera Server Virtual Services** section of this document.

The Port Following settings are not configured by the template. Refer to the **Port Following** section on how to configure Port Following.

3 Architecture

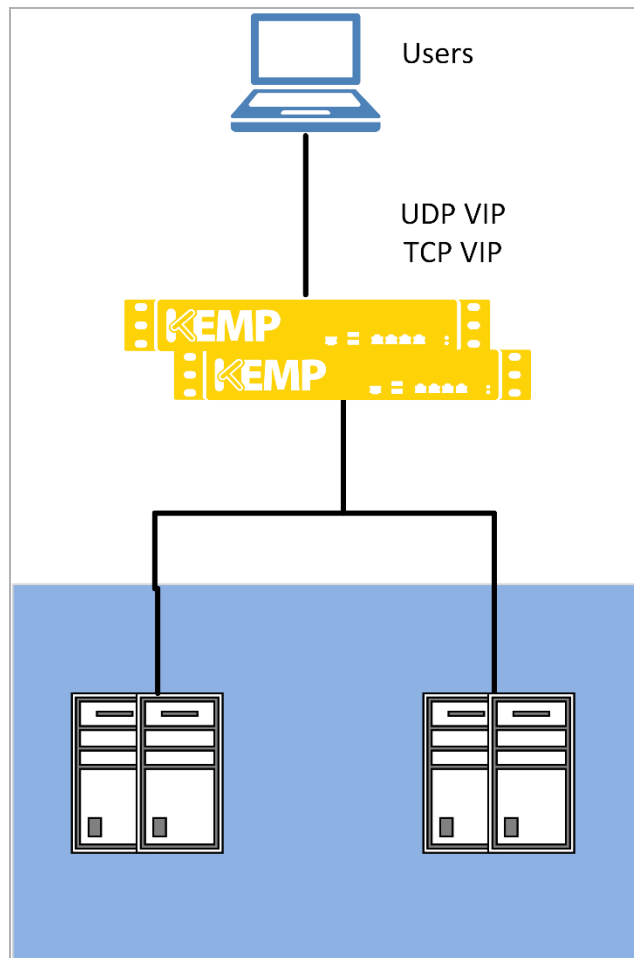

4 Configure Aspera Server Virtual Services

4.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

4 Configure Aspera Server Virtual Services

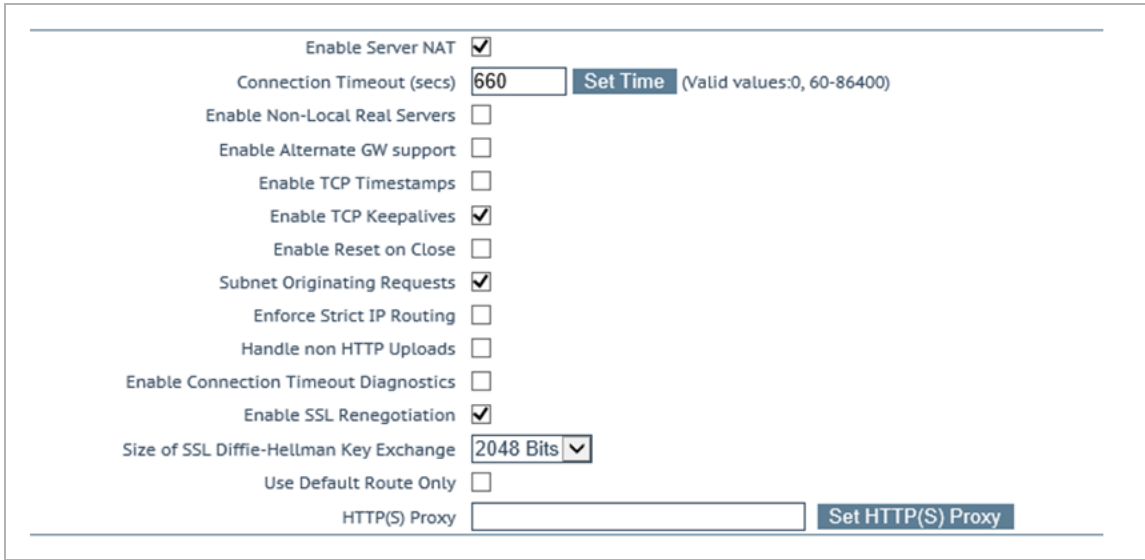

The screenshot shows a configuration window for Aspera Server with the following settings:

- Enable Server NAT: ☒
- Connection Timeout (secs): 660 (Set Time button, Valid values: 0, 60-86400)
- Enable Non-Local Real Servers: ☐
- Enable Alternate GW support: ☐
- Enable TCP Timestamps: ☐
- Enable TCP Keepalives: ☒
- Enable Reset on Close: ☐
- Subnet Originating Requests: ☒
- Enforce Strict IP Routing: ☐
- Handle non HTTP Uploads: ☐
- Enable Connection Timeout Diagnostics: ☐
- Enable SSL Renegotiation: ☒
- Size of SSL Diffie-Hellman Key Exchange: 2048 Bits (dropdown)
- Use Default Route Only: ☐
- HTTP(S) Proxy: (text box) (Set HTTP(S) Proxy button)

2. Select the **Subnet Originating Requests** check box.


4.2 Create the Aspera Virtual Services

The following sections describe the recommended settings for the Aspera Virtual Services.

4.2.1 Aspera HTTPS Virtual Service

The following are the steps involved and the values recommended to configure the Aspera HTTPS Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

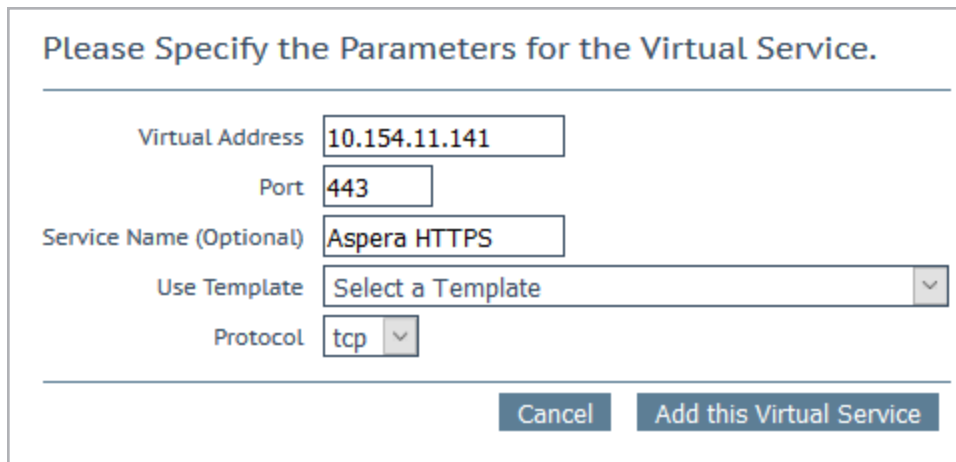

The dialog box titled "Please Specify the Parameters for the Virtual Service." contains the following fields and buttons:

- Virtual Address: 10.154.11.141
- Port: 443
- Service Name (Optional): Aspera HTTPS
- Use Template: Select a Template (dropdown)
- Protocol: tcp (dropdown)
- Buttons: Cancel, Add this Virtual Service

2. Type a valid IP address in the **Virtual Address** text box.

4 Configure Aspera Server Virtual Services

3. Type **443** in the **Port** text box.
4. Enter a recognizable **Service Name**, for example **Aspera HTTPS Server**.
5. Ensure **tcp** is selected as the **Protocol**.
6. Click **Add this Virtual Service**.
7. Enter the details shown in the following table.

Section	Option	Value	Comment
Standard Options	Persistence Mode	Source IP Address	
	Timeout	6 Minutes	
	Scheduling Method	least connection	
Advanced Properties	Add a Port 80 Redirector VS	https://%h%s	Click Add HTTP Redirector . This automatically creates a redirect on port 80.

8. Add the Real Servers:
 - a) Expand the **Real Servers** section.
 - b) Click **Add New**.
 - c) Type the address of the **Aspera HTTPS Server**.
 - d) Type **443** as the **Port**.

The Real Server **Port** should match the Virtual Service **Port**.

The **Forwarding method** and **Weight** values are set by default. An administrator can change these.

- e) Click **Add this Real Server**. Click **OK** to the pop-up message.
- f) Repeat the steps above to add more Real Servers as needed, based on the environment.

Create an Aspera HTTPS Virtual Service Offloaded HTTP Redirect Virtual Service

Clicking the **Add HTTP Redirector** button automatically creates a port 80 redirect Virtual Service. This is optional, but the purpose of this Virtual Service is to redirect any clients who have connected using HTTP to the HTTPS Virtual Service. Kemp also recommends changing the **Real Server Check Method** and **Persistence Mode** to **None**.

4.2.2 Aspera HTTPS-Failback Virtual Service

The following are the steps involved and the values recommended to configure the Aspera HTTPS-Failback Virtual Service:

- 1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

10.154.11.141

Port

8443

Service Name (Optional)

Aspera HTTPS-Failb

Use Template

Select a Template

Protocol

tcp

Cancel

Add this Virtual Service

- 2. Type a valid IP address in the **Virtual Address** text box.
- 3. Type **8443** in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example **Aspera HTTPS-Failback**.
- 5. Ensure **tcp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Enter the details shown in the following table:

Section	Option	Value
Standard Options	Transparency	Enabled
	Persistence Mode	Source IP Address
	Timeout	6 Minutes

Section	Option	Value
	Scheduling Method	least connection
Real Servers	Checked Port	8443

8. Add the Real Servers:

- Expand the **Real Servers** section.
- Click **Add New**.
- Type the address of the Aspera HTTPS-Failback Server.
- Type **8443** as the **Port**.

The Real Server **Port** should match the Virtual Service **Port**.

The **Forwarding method** and **Weight** values are set by default.
An administrator can change these.

- Click **Add this Real Server**. Click **OK** to the pop-up message.
- Repeat the steps above to add more Real Servers as needed, based on the environment.

4.2.3 Aspera FASP UDP Virtual Service

The following are the steps involved and the values recommended to configure the Aspera FASP UDP Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

10.154.11.141

Port

*

Service Name (Optional)

Aspera FASP UDP

Use Template

Select a Template

Protocol

udp

Cancel

Add this Virtual Service

- 2. Type a valid IP address in the **Virtual Address** text box.
- 3. Type * in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example **Aspera FASP UDP**.
- 5. Ensure **udp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Enter the details shown in the following table.

Section	Option	Value
Standard Options	Force L4	Disabled
	Persistence Mode	Source IP Address
	Timeout	6 Minutes
	Scheduling Method	least connection

- 8. Add the Real Servers:
 - a) Expand the **Real Servers** section.
 - b) Click **Add New**.
 - c) Type the address of the **Aspera FASBUDP Server**.
 - d) Type * as the **Port**.

The Real Server **Port** should match the Virtual Service **Port**.

The **Forwarding method** and **Weight** values are set by default. An administrator can change these.

- e) Click **Add this Real Server**. Click **OK** to the pop-up message.
- f) Repeat the steps above to add more Real Servers as needed, based on the environment.

4.2.4 Aspera FASP Virtual Service

The following are the steps involved and the values recommended to configure the Aspera FASP Virtual Service:

- 1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

10.154.11.141

Port

33001

Service Name (Optional)

Aspera FASP

Use Template

Select a Template

Protocol

tcp

Cancel

Add this Virtual Service

- 2. Type a valid IP address in the **Virtual Address** text box.
- 3. Type **33001** in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example **Aspera FASP**.
- 5. Ensure **tcp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Enter the details shown in the following table.

Section	Option	Value
Basic Properties	Service Type	HTTP/HTTPS

Section	Option	Value
Standard Options	Persistence Mode	Source IP Address
	Timeout	6 Minutes
	Scheduling Method	least connection
Advanced Properties	Port Following	No VIP Selected
	Add HTTP Headers	Legacy Operation(X-ClientSide)
Real Servers	Checked Port	33001

8. Add the Real Servers:

- a) Expand the **Real Servers** section.
- b) Click **Add New**.
- c) Type the address of the **Aspera FASP Server**.
- d) Type **33001** as the **Port**.

The Real Server **Port** should match the Virtual Service **Port**.

The **Forwarding method** and **Weight** values are set by default.
An administrator can change these.

- e) Click **Add this Real Server**. Click **OK** to the pop-up message.
- f) Repeat the steps above to add more Real Servers as needed, based on the environment.

4.3 Port Following

Port following must be set on both Virtual Services as follows and is explained in detail in the following sections.

4.3.1 Configure Port Following for the Aspera TCP Virtual Service

To configure port following for the Aspera TCP Virtual Service, follow the steps below:

1. In the main menu, go to **Virtual Services > View/Modify Services**.

4 Configure Aspera Server Virtual Services

2. Click **Modify** for the Aspera TCP Virtual Service which you created in the **Create the Aspera Virtual Services** section.
3. Expand the **Advanced Properties** section.

Advanced Properties

Content Switching

Disabled

Enable

HTTP Selection Rules

Show Selection Rules

HTTP Header Modifications

Show Header Rules

Port Following

Follow:

udp/10.154.11.121:80

Enable Caching

Enable Compression

Detect Malicious Requests

Enable Multiple Connect

Add Header to Request

:

Set Header

Add HTTP Headers

Legacy Operation(X-ClientSide)

"Sorry" Server

Port

Set Server Address

Not Available Redirection Handling

Error Code:

Redirect URL:

Set Redirect URL

Default Gateway

Set Default Gateway

Service Specific Access Control

Access Control

4. Select the Aspera Server UDP Virtual Service from the **Port Following** drop-down list.
5. Wait 10 seconds, or uncheck and check the **Activate or Deactivate Service** checkbox in the **Basic Properties** section for immediate activation.

4.3.2 Configure Port Following for the Aspera TCP Virtual Service

To configure port following for the Aspera TCP Virtual Service, follow the steps below:

1. In the main menu, go to **Virtual Services > View/Modify Services**.
2. Click **Modify** for the Aspera Server TCP Virtual Service which you created in the **Aspera HTTPS-Failback Virtual Service** section.
3. Expand the **Advanced Properties** section.

Advanced Properties

Not Available Server

Port

Set Server Address

Port Following

Follow:

tcp/10.154.11.121:80

Service Specific Access Control

Access Control

4. Select the Aspera TCP Virtual Service from the **Port Following** drop-down list.

5. Wait 10 seconds, or uncheck and check the **Activate or Deactivate Service** checkbox in the **Basic Properties** section for immediate activation.

References

Unless otherwise specified, the following documents can be found at: <http://kemptechnologies.com/documentation>.

Virtual Services and Templates, Feature Description

High Availability (HA), Feature Description

Last Updated Date

This document was last updated on 27 July 2023.