



TFTP

Deployment Guide

UPDATED: 27 July 2023

Copyright Notices

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
2 Architecture	5
3 Configure the LoadMaster	6
3.1 Enable Subnet Originating Requests Globally	6
3.2 Enable Check Persist Globally	7
4 Create a TFTP Virtual Service	9
Last Updated Date	11

1 Introduction

TFTP is a free, open source IPv6 ready application that includes DHCP, TFTP, DNS, SNTP and Syslog servers as well as a TFTP client.

The Kemp LoadMaster is used to load balance the TFTP Server workload. The LoadMaster offers advanced Layer 4 and Layer 7 server load balancing, SSL Acceleration and a multitude of other advanced Application Delivery Controller (ADC) features. The LoadMaster intelligently and efficiently distributes user traffic among the application servers so that users get the best experience possible.


1.1 Document Purpose

This document provides the recommended LoadMaster settings used when load balancing the TFTP Server workload. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined. The Kemp support site can be found at: <https://support.kemptechnologies.com>

1.2 Intended Audience

This document is intended to be read by anyone who is interested in configuring the LoadMaster to optimize the TFTP Server.

2 Architecture

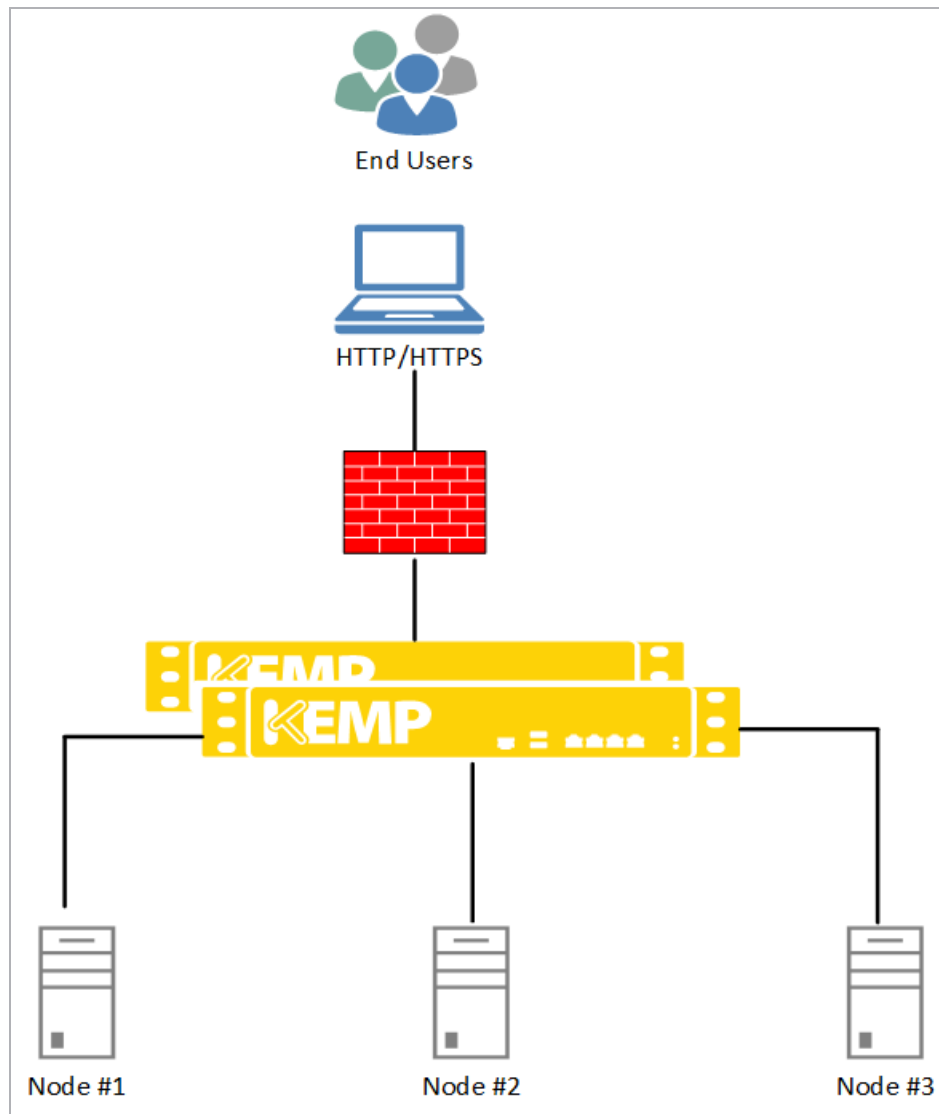

3 Configure the LoadMaster

The deployed TFTP Server environment determines which of the following setups is used.

3.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

3 Configure the LoadMaster

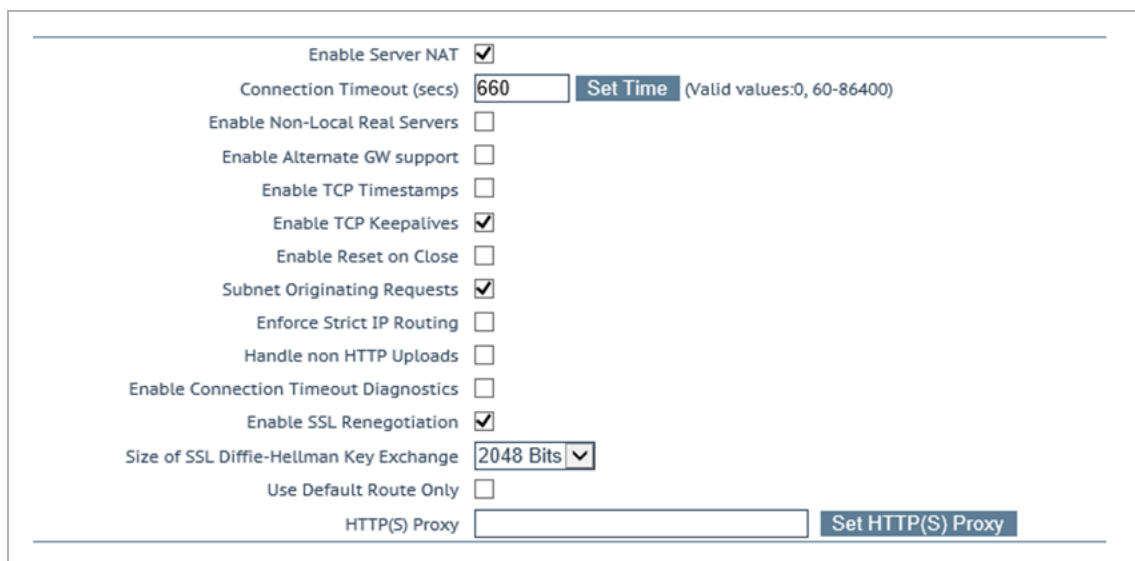

The screenshot shows a configuration window with the following settings:

- Enable Server NAT: ☒
- Connection Timeout (secs): 660 [Set Time] (Valid values:0, 60-86400)
- Enable Non-Local Real Servers: ☐
- Enable Alternate GW support: ☐
- Enable TCP Timestamps: ☐
- Enable TCP Keepalives: ☒
- Enable Reset on Close: ☐
- Subnet Originating Requests: ☒
- Enforce Strict IP Routing: ☐
- Handle non HTTP Uploads: ☐
- Enable Connection Timeout Diagnostics: ☐
- Enable SSL Renegotiation: ☒
- Size of SSL Diffie-Hellman Key Exchange: 2048 Bits [v]
- Use Default Route Only: ☐
- HTTP(S) Proxy: [] [Set HTTP(S) Proxy]

2. Select the **Subnet Originating Requests** check box.

3.2 Enable Check Persist Globally

It is recommended that you change the **Always Check Persist** option to **Yes – Accept Changes**. Use the following steps:

1. Go to **System Configuration > Miscellaneous Options > L7 Configuration**.

3 Configure the LoadMaster

Enable Server NAT	<input checked="" type="checkbox"/>
Connection Timeout (secs)	<input type="text" value="660"/> Set Time (Valid values:0, 60-86400)
Enable Non-Local Real Servers	<input type="checkbox"/>
Enable Alternate GW support	<input type="checkbox"/>
Enable TCP Timestamps	<input type="checkbox"/>
Enable TCP Keepalives	<input checked="" type="checkbox"/>
Enable Reset on Close	<input type="checkbox"/>
Subnet Originating Requests	<input checked="" type="checkbox"/>
Enforce Strict IP Routing	<input type="checkbox"/>
Handle non HTTP Uploads	<input type="checkbox"/>
Enable Connection Timeout Diagnostics	<input type="checkbox"/>
Legacy TCP Timewait handling	<input type="checkbox"/>
Enable SSL Renegotiation	<input checked="" type="checkbox"/>
Force Real Server Certificate Checking	<input type="checkbox"/>
Size of SSL Diffie-Hellman Key Exchange	<input type="text" value="2048 Bits"/>
Log SSL errors	<input type="text" value="Fatal errors only"/>
Use Default Route Only	<input type="checkbox"/>
HTTP(S) Proxy	<input type="text"/> Set HTTP(S) Proxy

2. Click the **Always Check Persist** drop-down arrow and select **Yes – Accept Changes**.

4 Create a TFTP Virtual Service

The following are the steps involved and the recommended settings to configure the TFTP Virtual Service:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

10.154.11.181

Port

69

Service Name (Optional)

TFTP

Use Template

TFTP

Protocol

udp

Cancel

Add this Virtual Service

2. Type a valid **Virtual Address**.
3. Type **69** as the **Port**.
4. Enter a recognizable **Service Name**, such as **TFTP Virtual Service**.
5. Select **udp** as the **Protocol**.
6. Click **Add this Virtual Service**.
7. Configure the settings as shown in the following table:

Section	Option	Value
Standard Options	Force L4	Enabled
	Scheduling Method	least connection
Real Servers	Real Server Check Method	ICMP Ping

8. Add the Real Servers:
 - a) Expand the **Real Servers** section.
 - b) Click **Add New**.
 - c) Enter the address of the relevant Real Server.
 - d) Complete the other fields as required.

4 Create a TFTP Virtual Service

- e) Click **Add this Real Server** then click **OK** to the pop-up message.
- f) Repeat the steps above to add more Real Servers as needed, based on your environment.

Last Updated Date

This document was last updated on 27 July 2023.