



AirWatch

Deployment Guide

UPDATED: 27 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
1.3 Architecture	5
2 Template	6
3 Configure the LoadMaster	7
3.1 Enable Subnet Originating Requests Globally	7
3.2 Configure AirWatch Mobile Access Gateway (MAG) Virtual Services	8
3.2.1 Configure AirWatch MAG Virtual Service	8
3.2.2 Configure AirWatch MAG Port 2010 Virtual Services	9
3.2.3 Configure AirWatch MAG Port 2020 Virtual Service	11
3.3 Configure an AirWatch Secure Email Gateway (SEG) Virtual Service	12
References	14
Last Updated Date	15

1 Introduction

AirWatch is a VMware Enterprise Mobility Management (EMM) software product, which allows an enterprise's employees and associates use mobile devices. When deployed with Kemp LoadMasters, AirWatch is secure, multi-tenant, highly scalable and can be integrated with existing enterprise systems, be they on-site or in the cloud. AirWatch supports all major mobile players including; Apple iOS, Android, Symbian and Windows Phone.

Users require confidence that the service is available when needed. Kemp LoadMasters help provide reliability. When deployed as a pair, two LoadMasters give the security of High Availability (HA). HA allows two physical or virtual machines to become one logical device. Only one of these units is ever handling traffic at any particular moment. One unit is active and the other is a hot standby (passive). This provides redundancy and resiliency, meaning if one LoadMaster goes down for any reason, the hot standby can become active, therefore avoiding any downtime. For more information on HA please refer to the [High Availability \(HA\), Feature Description](#).

1.1 Document Purpose


This document provides guidance on deploying AirWatch with a Kemp LoadMaster. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined.

The Kemp support site can be found at: <https://support.kemptechnologies.com>.

1.2 Intended Audience

This document is for anyone deploying AirWatch with a Kemp LoadMaster.

1.3 Architecture

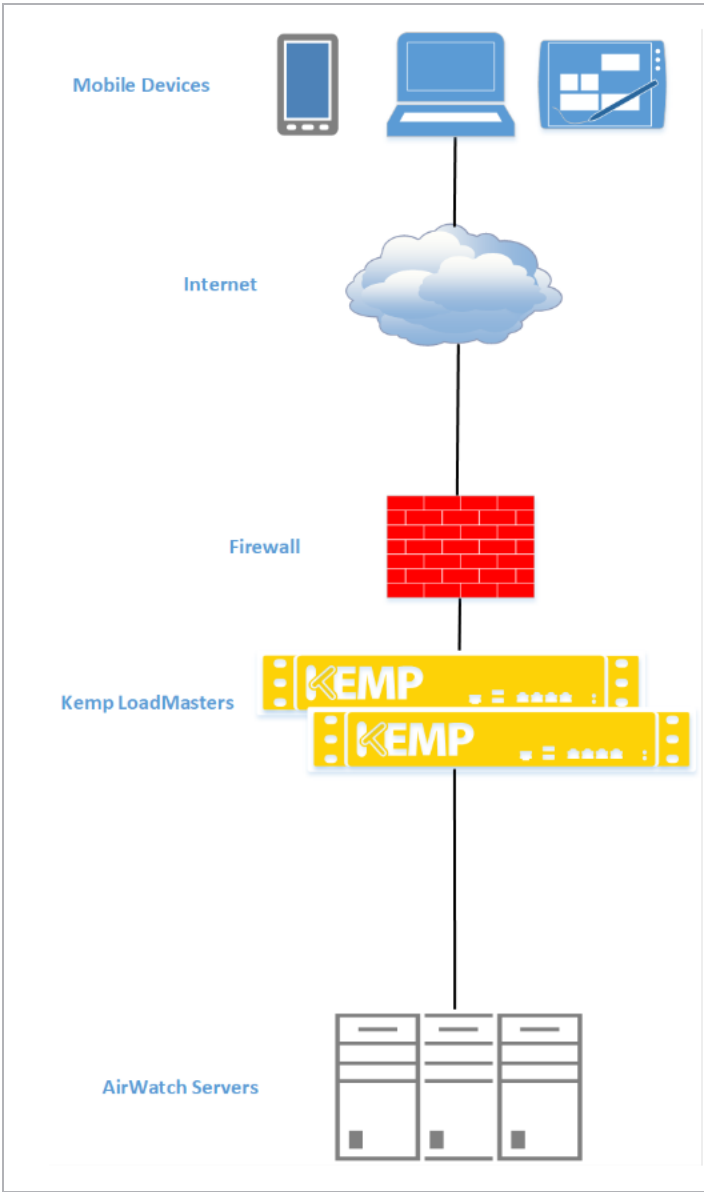

2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

3 Configure the LoadMaster

The following sections provide step-by-step instructions on how to configure a LoadMaster to load balance the AirWatch workload.

3.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

3 Configure the LoadMaster

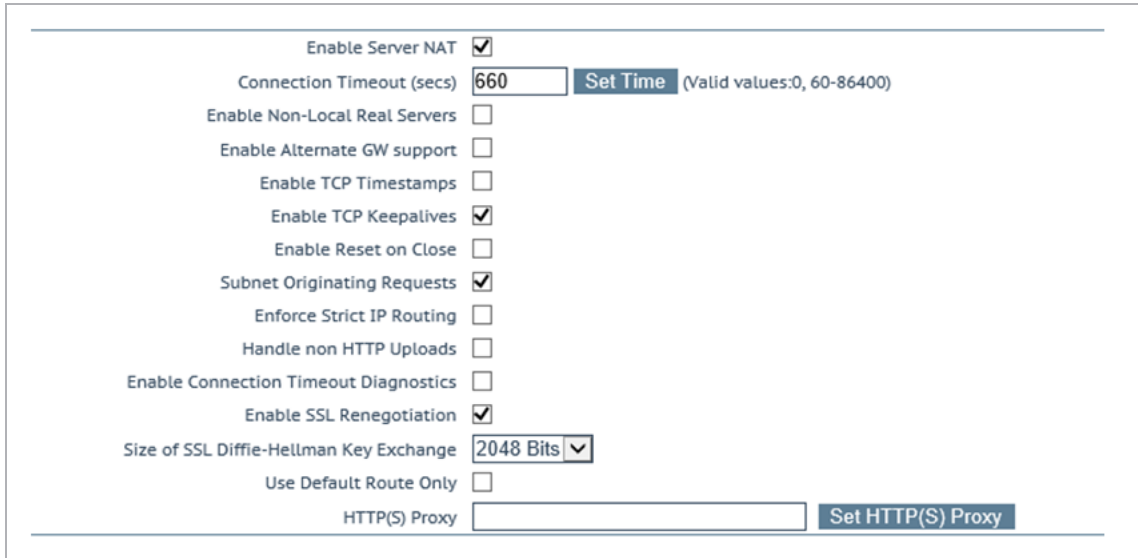

Enable Server NAT ☒

Connection Timeout (secs) [Set Time](#) (Valid values:0, 60-86400)

Enable Non-Local Real Servers ☐

Enable Alternate GW support ☐

Enable TCP Timestamps ☐

Enable TCP Keepalives ☒

Enable Reset on Close ☐

Subnet Originating Requests ☒

Enforce Strict IP Routing ☐

Handle non HTTP Uploads ☐

Enable Connection Timeout Diagnostics ☐

Enable SSL Renegotiation ☒

Size of SSL Diffie-Hellman Key Exchange

Use Default Route Only ☐

HTTP(S) Proxy [Set HTTP\(S\) Proxy](#)

2. Select the **Subnet Originating Requests** check box.


3.2 Configure AirWatch Mobile Access Gateway (MAG) Virtual Services

When configuring the LoadMaster to load balance AirWatch MAG, three Virtual Services must be set up.

3.2.1 Configure AirWatch MAG Virtual Service

The following are the steps involved and the recommended settings to configure an AirWatch MAG Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

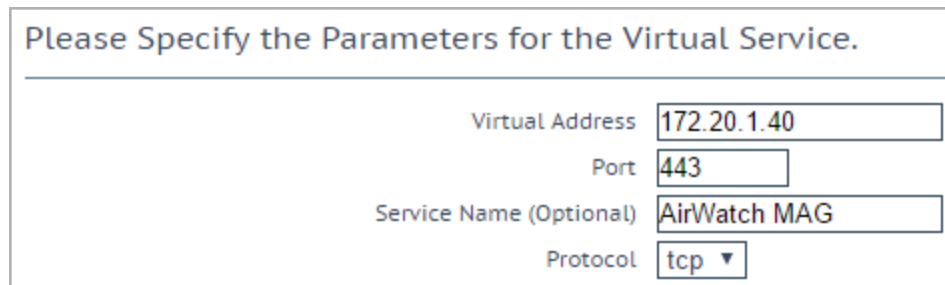

Please Specify the Parameters for the Virtual Service.

Virtual Address

Port

Service Name (Optional)

Protocol

2. Enter a valid IP address in the **Virtual Address** text box.
3. Enter **443** in the **Port** text box.

3 Configure the LoadMaster

4. Enter a recognizable **Service Name**, for example **AirWatch MAG**.
5. Ensure **tcp** is selected as the **Protocol**.
6. Click **Add this Virtual Service**.
7. Configure the settings as recommended in the following table:

Section	Option	Value	Comment
Standard Options	Transparency	Disabled	
	Persistence Mode	Source IP Address	
	Timeout	30 Minutes	
	Scheduling Method	round robin	
	Idle Connection Timeout	3600	Click Set Idle Timeout .
Real Servers	Real Server Check Parameters	HTTPS Protocol	
	HTTP Method	HEAD	Click the Add New button

8. Add the Real Servers.

- a) Enter the IP address of the AirWatch server.
- b) Enter **443** as the **Port**.

The **Forwarding method** and **Weight** values are set by default. An administrator can change these.

- c) Click **Add this Real Server**. Click **OK** to the pop-up message.
- d) Repeat steps **a)** to **c)** above to add more Real Servers as needed, based on the environment.

3.2.2 Configure AirWatch MAG Port 2010 Virtual Services

The following are the steps involved and the recommended settings to configure an AirWatch MAG port 2010 Virtual Service:

1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.

3 Configure the LoadMaster

Please Specify the Parameters for the Virtual Service.

Virtual Address

172.20.1.40

Port

2010

Service Name (Optional)

AirWatch MAG port 2010

Protocol

tcp

- 2. Enter a valid IP address in the **Virtual Address** text box.
- 3. Enter **2010** in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example **AirWatch MAG port 2010**.
- 5. Ensure **tcp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Configure the settings as recommended in the following table:

Section	Option	Value	Comment
Standard Options	Transparency	Disabled	
	Server Initiating Protocols	Normal Protocols	
	Persistence Options	Source IP Address	
	Timeout	30 Minutes	
	Scheduling Method	round robin	
	Idle Connection Timeout	3600	Click Set Idle Timeout .
Real Servers	Real Server Check Parameters	TCP Connection Only	
	Checked Port	2010	Click Set Checked Port .

- 8. Add the Real Servers.
 - a) Enter the IP address of the AirWatch server.
 - b) Enter **2010** as the **Port**.

The **Forwarding method** and **Weight** values are set by default. An administrator can change these.

- c) Click **Add this Real Server**. Click **OK** to the pop-up message.
- d) Repeat steps **a)** to **c)** above to add more Real Servers as needed, based on the environment.

3.2.3 Configure AirWatch MAG Port 2020 Virtual Service

The following are the steps involved and the recommended settings to configure an AirWatch MAG port 2020 Virtual Service:

- 1. In the main menu of the LoadMaster WUI, go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

172.20.1.42

Port

2020

Service Name (Optional)

Airwatch MAG Port 20

Protocol

tcp ▾

- 2. Enter a valid IP address in the **Virtual Address** text box.
- 3. Enter **2020** in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example **AirWatch MAG Port 2020**.
- 5. Ensure **tcp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Configure the settings as recommended in the following table:

Section	Option	Value	Comment
Standard Options	Transparency	Disabled	
	Server Initiating Protocols	Normal Protocols	
	Persistence Options	Source IP Address	
	Timeout	30 Minutes	

3 Configure the LoadMaster

Section	Option	Value	Comment
	Scheduling Method	round robin	
	Idle Connection Timeout	3600	Click Set Idle Timeout .
Real Servers	Real Server Check Parameters	TCP Connection Only	
	Checked Port	2020	Click Set Checked Port then click the Add New button.

8. Add Real Servers.

a) Enter the IP address of the AirWatch server.

b) Enter **2020** as the **Port**.

The **Forwarding method** and **Weight** values are set by default. An administrator can change these.

c) Click **Add this Real Server**. Click **OK** to the pop-up message.

d) Repeat steps **a)** to **c)** above to add more Real Servers as needed, based on the environment.

3.3 Configure an AirWatch Secure Email Gateway (SEG) Virtual Service

The following are the steps involved and the recommended settings to configure an AirWatch SEG Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

172.20.1.41

Port

443

Service Name (Optional)

AirWatch SEG

Protocol

tcp ▼

3 Configure the LoadMaster

2. Enter a valid IP address in the **Virtual Address** text box.
3. Enter **443** in the **Port** text box.
4. Enter a recognizable **Service Name**, for example **AirWatch SEG**.
5. Ensure **tcp** is selected as the **Protocol**.
6. Click **Add this Virtual Service**.
7. Configure the settings as recommended in the following table:

Section	Option	Value	Comment
Standard Options	Force L4	Clear	
	Transparency	Clear	
	Persistence Options	Source IP Address	
	Timeout	30 Minutes	
	Scheduling Method	round robin	
Real Servers	Real Server Check Parameters	HTTPS Protocol	
	HTTP Method	Head	Click the Add New button.

8. Add the Real Servers:

- a) Enter the IP address of the AirWatch server.
- b) Enter **443** as the **Port**.

The **Forwarding method** and **Weight** values are set by default.
An administrator can change these.

- c) Click **Add this Real Server**. Click **OK** to the pop-up message.
- d) Repeat steps **a)** to **c)** above to add more Real Servers as needed, based on the environment.

References

Unless otherwise specified, the following documents can be found at:

<http://kemptechnologies.com/documentation>.

Virtual Services and Templates, Feature Description.

High Availability (HA), Feature Description

Last Updated Date

This document was last updated on 27 July 2023.