



# EMC Syncplicity

## Deployment Guide

UPDATED: 27 July 2023

**© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.**

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS\_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

# Table of Contents

---

<b>1 Introduction</b>	<b>4</b>
1.1 Document Purpose	4
1.2 Intended Audience	4
1.3 Prerequisites	4
<b>2 Template</b>	<b>5</b>
<b>3 Solution Overview</b>	<b>6</b>
3.1 Topology	6
3.2 LoadMaster Functionality Applied	6
<b>4 Deployment Example</b>	<b>8</b>
4.1 Network Environment	8
<b>5 LoadMaster Configuration</b>	<b>10</b>
5.1 Enable Subnet Originating Requests Globally	10
5.2 Virtual Service for Syncplicity Cloud to Storage Connectors	11
5.2.1 Virtual Service Settings	11
5.3 Content Rules	12
5.4 Virtual Service for Storage Connector to Atmos	13
<b>6 Configuration: Summary</b>	<b>14</b>
<b>References</b>	<b>15</b>
<b>Last Updated Date</b>	<b>16</b>

# 1 Introduction

Syncplicity is an enterprise sync and share solution from EMC which enables corporate users to collaborate from anywhere while providing corporate IT with the security and control required to comply with best practice and policy. In addition to being a service hosted by EMC, Syncplicity can be deployed as an on-premise solution integrated with storage architectures such as EMC Atmos.

The Kemp LoadMaster not only addresses the load balancing requirements defined by EMC, it can add significant value in multi-tenant environments such as service providers and enterprise deployments.

## 1.1 Document Purpose

This document outlines how a Kemp LoadMaster can be deployed together with EMC Syncplicity. It also provides guidelines for the configuration of LoadMaster services.

## 1.2 Intended Audience

This document is intended to be used by anyone deploying a LoadMaster in conjunction with on premise Syncplicity and by service providers deploying a multi-tenant Syncplicity service.

## 1.3 Prerequisites

The reader should have sufficient knowledge of networking, the LoadMaster and Syncplicity products to implement the solution outlined.

# 2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.


Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

# 3 Solution Overview

## 3.1 Topology

Syncplicity consists of a cloud-based orchestration layer connecting authenticated and authorized clients with their storage using a customer-specific URL.

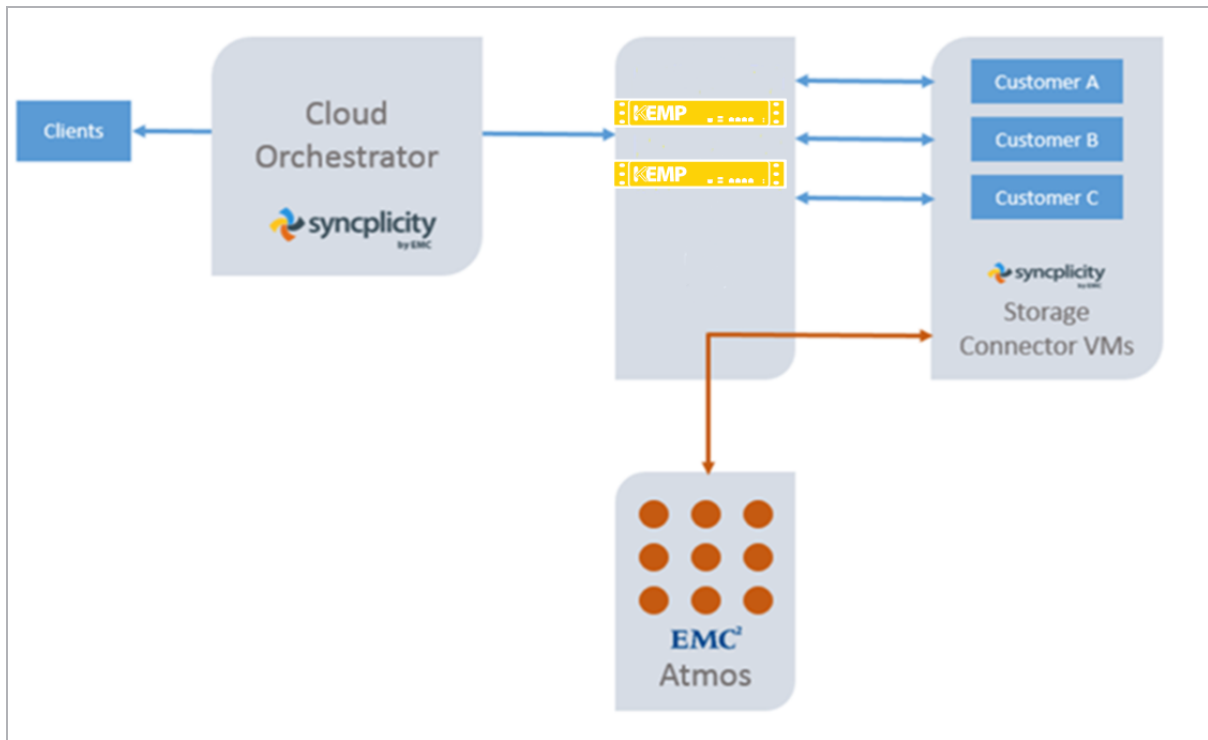

Based on the URL content, the LoadMaster infrastructure forwards the customer request to the customer-specific Storage Connector. The Storage Connector services the customer request by communicating with the EMC Atmos service via the LoadMaster.

While the Cloud Orchestrator is designed to deal with a single IP address (Storage Connector), the LoadMaster enables a multi-tenant environment by selecting the client's Storage Connector based on the client-specific URL.

## 3.2 LoadMaster Functionality Applied

The LoadMaster environment enhances the Syncplicity environment in the following ways:

## 3 Solution Overview


- It load balances Storage Connector hosts
- It load balances traffic on the Atmos storage cluster
- It simplifies scaling of Storage Connectors
- It performs Network Address Translation (NAT) of internal addresses
- Acts as a single point for managing and controlling digital certificates
- Enables multi-tenancy on a single IP address by mapping the request URL to subscriber-specific Storage Connectors

# 4 Deployment Example

To highlight the LoadMaster capabilities, the example below assumes the following:

- On-Premise, Multi-Tenant service on the domain example.com
- Services are provided to Customer A, Customer B and Customer C
- Each customer has a pair of Storage Connectors deployed
- A single certificate is used to secure communication with all customers
- An EMC Atmos cluster provides a multi-tenant storage platform
- For simplicity, a single LoadMaster is deployed, although in a real situation a pair of LoadMasters would be used for resilience

## 4.1 Network Environment

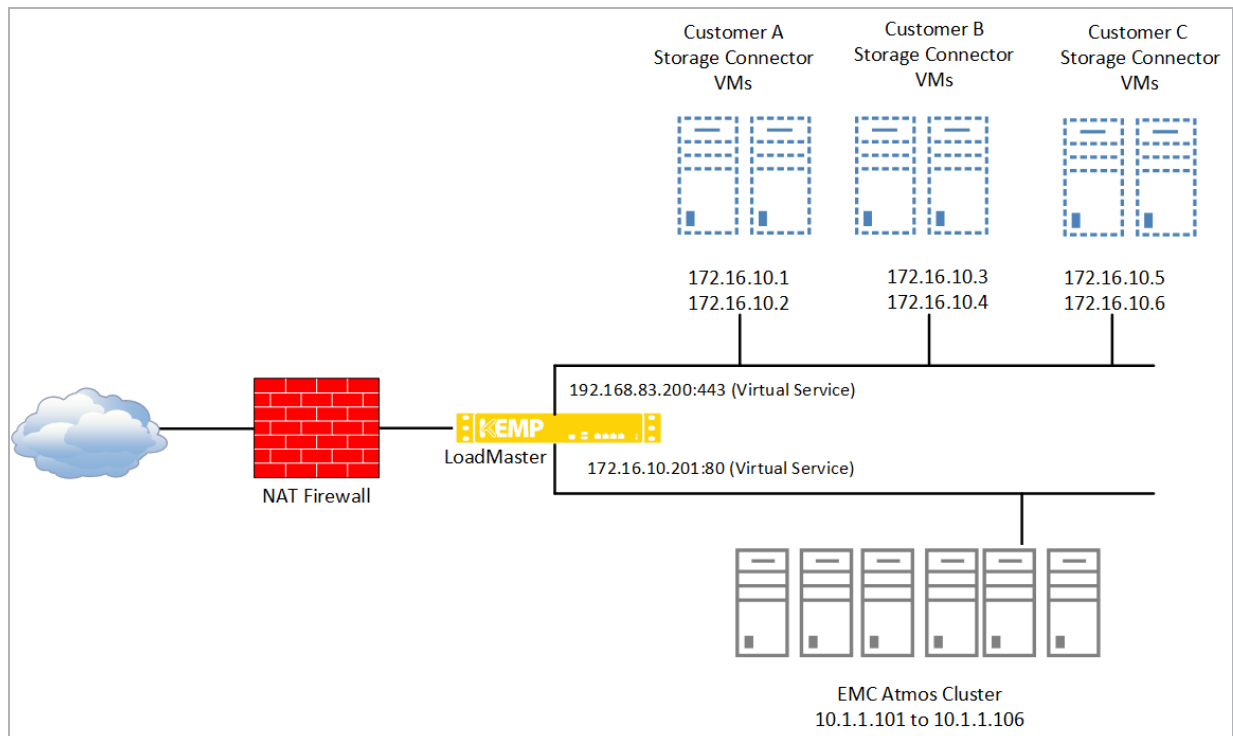



## 4 Deployment Example

- The LoadMaster sits behind a NAT firewall on subnet 192.168.83.0/24. A virtual IP of 192.168.83.200 is created to service requests from the Cloud Orchestrator
- The Storage Connector VMs are on subnet 172.16.10.0/24
- Customer A connects via <https://customera.example.com> and has Storage Connector hosts at 172.16.10.1 and 172.16.10.2
- Customer B connects via <https://customerb.example.com> and has Storage Connector hosts at 172.16.10.3 and 172.16.10.4
- Customer C connects via <https://customerc.example.com> and has Storage Connector hosts at 172.16.10.5 and 172.16.10.6
- The EMC Atmos cluster is on subnet 10.1.1.0/24 with IP addresses of 10.1.1.101, 10.1.1.102, 10.1.1.103, 10.1.1.104, 10.1.1.105, and 10.1.1.106
- The LoadMaster is configured with addresses of 10.1.1.200 and 172.16.10.200 to provide connectivity to the Storage Connector and the EMC Atmos storage platform

# 5 LoadMaster Configuration

## 5.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.


In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.

When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

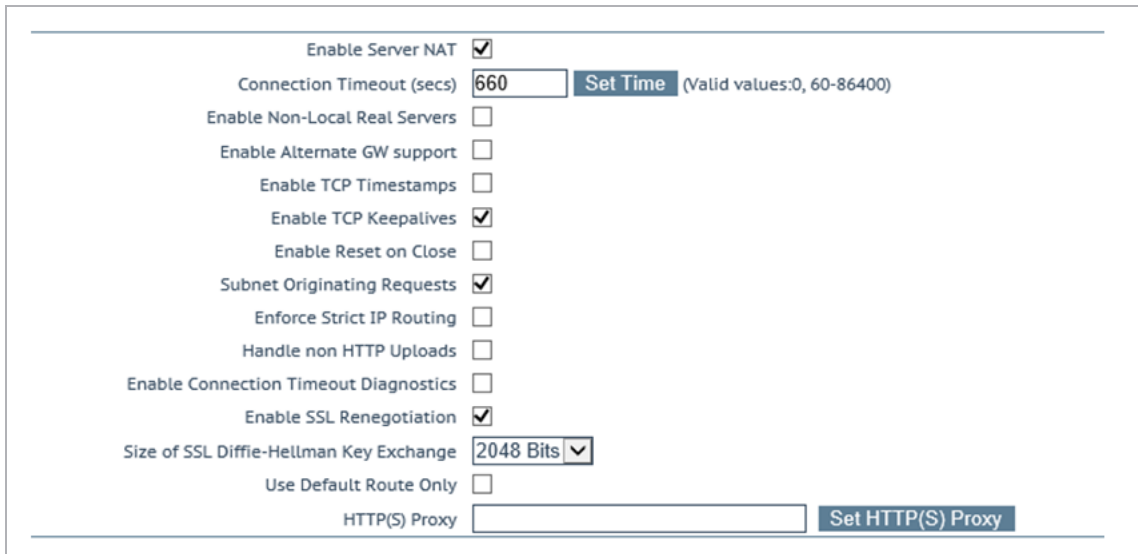

Enable Server NAT	<input checked="" type="checkbox"/>
Connection Timeout (secs)	660 <span>Set Time</span> (Valid values:0, 60-86400)
Enable Non-Local Real Servers	<input type="checkbox"/>
Enable Alternate GW support	<input type="checkbox"/>
Enable TCP Timestamps	<input type="checkbox"/>
Enable TCP Keepalives	<input checked="" type="checkbox"/>
Enable Reset on Close	<input type="checkbox"/>
Subnet Originating Requests	<input checked="" type="checkbox"/>
Enforce Strict IP Routing	<input type="checkbox"/>
Handle non HTTP Uploads	<input type="checkbox"/>
Enable Connection Timeout Diagnostics	<input type="checkbox"/>
Enable SSL Renegotiation	<input checked="" type="checkbox"/>
Size of SSL Diffie-Hellman Key Exchange	2048 Bits <input type="button" value="v"/>
Use Default Route Only	<input type="checkbox"/>
HTTP(S) Proxy	<input type="text"/> <span>Set HTTP(S) Proxy</span>

2. Select the **Subnet Originating Requests** check box.

## 5.2 Virtual Service for Syncplicity Cloud to Storage Connectors

For our example, a Virtual Service needs to be created on 192.168.83.200 which redirects requests to the customer-specific Sub-Virtual Service (SubVS) based on the requestor URL. To do this, follow the steps below in the LoadMaster Web User Interface (WUI):

1. Create a Virtual Service on the LoadMaster which responds to requests on port **443** coming from the Syncplicity Cloud.

Please Specify the Parameters for the Virtual Service.	
Virtual Address	<input type="text" value="192.168.83.200"/>
Port	<input type="text" value="443"/>
Service Name (Optional)	<input type="text" value="Syncplicity"/>
Protocol	<input type="text" value="tcp"/>

2. Configure the Virtual Service using the recommended settings as listed in the **Virtual Service Settings** section.
3. For each customer, create a SubVS and add Real Servers for their Storage Connector servers.

Basic Properties	
SubVS Name	<input type="text" value="Customer A"/> <a href="#">Set Nickname</a>
SubVS Type	<input type="text" value="HTTP/HTTPS"/>
SubVS Weight	<input type="text" value="1000"/> <a href="#">Set Weight</a>
SubVS Limit	<input type="text" value="0"/> <a href="#">Set Limit</a>

The Storage Connection host is on port **9000**.

4. Add any Real Servers, as needed.

### 5.2.1 Virtual Service Settings

The following, are Kemp recommended settings for a Syncplicity Virtual Service. All other options remain as per the default configuration. However, changes can be made to any settings, as needed based on your environment.

Section	Option	Value	Comment
Standard Options	Transparency	Enabled	
	Persistence Method	None	
	Scheduling Method	round robin	
SSL Properties	SSL Acceleration	Enabled	A wildcard certificate allows secure connections to be established with a request URL in the format of *.example.com. With this approach, a single certificate secures traffic for all clients in a multi-tenant environment.
	Cipher Set	Best Practices	For further information on cipher sets, please refer to the <a href="#">SSL Accelerated Services, Feature Description</a> .
Real Servers	Real Server Check Parameters	HTTP Protocol	These settings are used to define the URL to use for checking the availability of a Real Server.
	HTTP Method	HEAD	

## 5.3 Content Rules

Content rules allow traffic be redirected based on criteria, including the URL requested by the client.

Content Matching Rules						Create New ...
Name	Type	Options	Header	Pattern	Operation	
CustomerARedirect	RegEx	Ignore Case	host	customera.example.com	Modify	Delete
CustomerBRedirect	RegEx	Ignore Case	host	customerb.example.com	Modify	Delete
CustomerCRedirect	RegEx	Ignore Case	host	customerc.example.com	Modify	Delete

In our example, the LoadMaster is configured with a content rule for each customer so requests to the customer-specific URL are redirected to the customer-specific Storage Controller pair.

Rules	Operation
1	Disable Modify Delete
None	Disable Modify Delete
None	Disable Modify Delete

In the **SubVS** section of the **Virtual Service** properties page, add the appropriate content matching rule for each customer.

For more information on content rules in general, please refer to the [Content Rules, Feature Description](#).

## 5.4 Virtual Service for Storage Connector to Atmos

The Storage Connector nodes communicate with the Atmos storage backend via port **80**. The Atmos storage environment consists of multiple nodes and any of which are capable of servicing requests from Storage Connectors. EMC suggests using a round robin algorithm on a load balancer. This results in even distribution of service requests across the Atmos nodes. The health of the Atmos environment can be tested using PING or by requesting the /rest page from the Atmos node.

Basic Properties	
Service Name	AtmostREST <span>Set Nickname</span>
Alternate Address	<input type="text"/> <span>Set Alternate Address</span>
Service Type	HTTP/HTTPS ▼
Activate or Deactivate Service	<input checked="" type="checkbox"/>

A Virtual Service should be created on the LoadMaster interface which is connected to the particular Storage Connector subnet. This Virtual Service should accept HTTP requests on port **80** and balance them, using **round robin**, to the Atmos nodes (the six IP addresses on 10.1.1.0/24 in this example).

Real Servers	
Real Server Check Parameters	ICMP Ping ▼
Enhanced Options: <input type="checkbox"/>	

Atmos nodes are added as Real Servers with the server check set to **ICMP Ping** or **HTTP Protocol**. Using HTTP as the check protocol gives a view of the Atmos REST service status while PING only checks the host network status.

# 6 Configuration: Summary

4	Virtual IP Address	Prot	Name	Layer	Certificate Installed	Status	Real Servers	5
	172.16.10.201:80	tcp	AtmosREST	L7		● Up	10.1.1.101 10.1.1.102 10.1.1.103 10.1.1.104 10.1.1.105 10.1.1.106	
1	192.168.83.200:443	tcp	Syncplicity	L7	on Real Server	● Up	Customer A Customer B Customer C	
2	#1	tcp	Customer A	L7		● Up	172.16.10.1:9000 172.16.10.2:9000	
	#2	tcp	Customer B	L7		● Up	172.16.10.3:9000 172.16.10.4:9000	3
	#3	tcp	Customer C	L7		● Up	172.16.10.5:9000 172.16.10.6:9000	

Syncplicity clients connect via the Syncplicity orchestration cloud to the Virtual IP [1] on the LoadMaster which is listening on port **443**.

Based on the request URL, the connection [2] is forwarded to the customer's Connection Server pair on port **9000** [3].

The Connection Server makes a REST request on port **80** to the Atmos Virtual IP [4] which balances the request to one of the available Atmos nodes [5].

# References

Unless otherwise specified, the following documents can be found at <http://kemptechnologies.com/documentation>.

**Content Rules, Feature Description**

**Virtual Services and Templates, Feature Description**

**SSL Accelerated Services, Feature Description**

# Last Updated Date

This document was last updated on 27 July 2023.