



Ellucian Luminis Portal

Deployment Guide

UPDATED: 27 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	4
1.2 Intended Audience	4
2 Architecture	5
3 Configure the LoadMaster	6
3.1 Enable Check Persist Globally	6
3.2 Enable Subnet Originating Requests Globally	6
4 Configure the Luninis Portal Reencrypted Virtual Service	8
4.1 Configure the Luminis Portal Reencrypted HTTP Redirect Virtual Service	10
Last Updated Date	11

1 Introduction

Ellucian Luminis Portal is a web services and delivery environment tailored for higher education. It enables you to provide an interactive and collaborative environment. It supports a richer, more personalized user experience, improved information and service delivery and simplified administration and technology management.

1.1 Document Purpose


This document provides the recommended LoadMaster settings used when load balancing the Ellucian Luminis Portal workload. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined. The Kemp support site can be found at:

<https://support.kemptechnologies.com>.

1.2 Intended Audience

This document is for anyone deploying Ellucian Luminis Portal with a Kemp LoadMaster.

2 Architecture

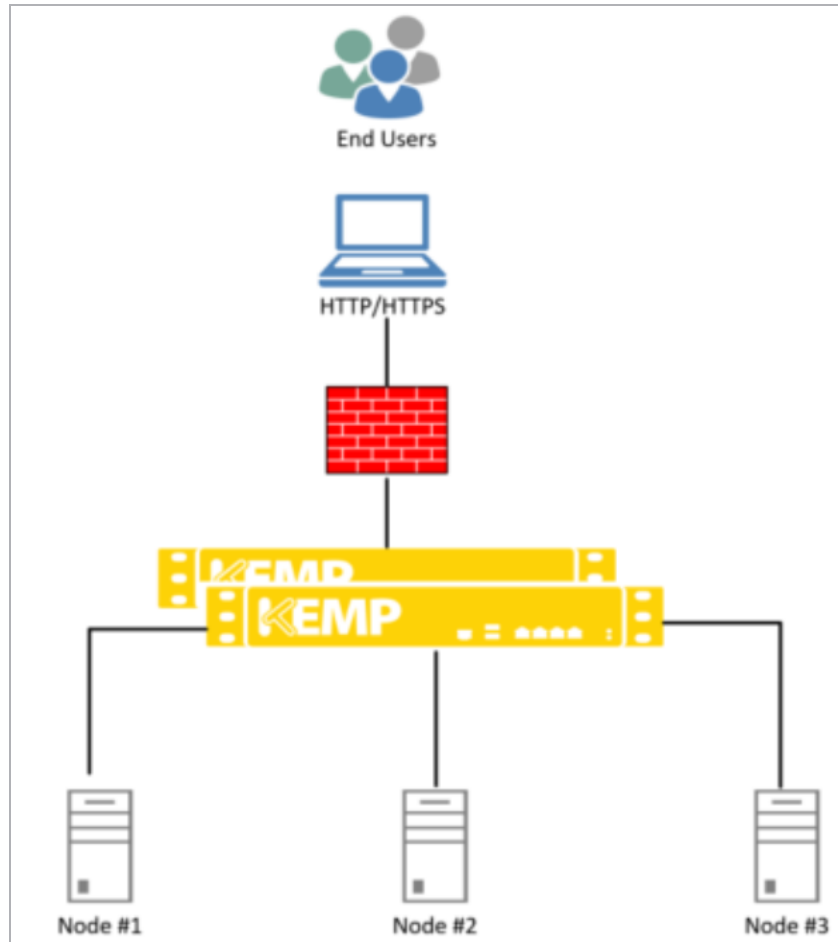


3 Configure the LoadMaster

Follow the steps in the sections below to configure the LoadMaster with the recommended settings to load balance the Ellucian Luminis Portal workload.

3.1 Enable Check Persist Globally

It is recommended that you change the **Always Check Persist** option to **Yes – Accept Changes**. Use the following steps:

1. Go to **System Configuration > Miscellaneous Options > L7 Configuration**.

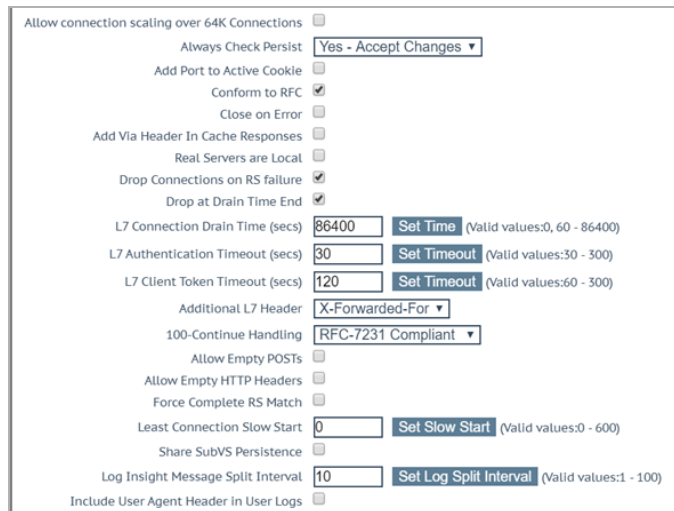

Allow connection scaling over 64K Connections	<input type="checkbox"/>
Always Check Persist	Yes - Accept Changes ▼
Add Port to Active Cookie	<input type="checkbox"/>
Conform to RFC	<input checked="" type="checkbox"/>
Close on Error	<input type="checkbox"/>
Add Via Header In Cache Responses	<input type="checkbox"/>
Real Servers are Local	<input type="checkbox"/>
Drop Connections on RS failure	<input checked="" type="checkbox"/>
Drop at Drain Time End	<input checked="" type="checkbox"/>
L7 Connection Drain Time (secs)	86400 Set Time (Valid values:0, 60 - 86400)
L7 Authentication Timeout (secs)	30 Set Timeout (Valid values:30 - 300)
L7 Client Token Timeout (secs)	120 Set Timeout (Valid values:60 - 300)
Additional L7 Header	X-Forwarded-For ▼
100-Continue Handling	RFC-7231 Compliant ▼
Allow Empty POSTs	<input type="checkbox"/>
Allow Empty HTTP Headers	<input type="checkbox"/>
Force Complete RS Match	<input type="checkbox"/>
Least Connection Slow Start	0 Set Slow Start (Valid values:0 - 600)
Share SubVS Persistence	<input type="checkbox"/>
Log Insight Message Split Interval	10 Set Log Split Interval (Valid values:1 - 100)
Include User Agent Header in User Logs	<input type="checkbox"/>

2. Click the **Always Check Persist** drop-down arrow and select **Yes – Accept Changes**.

3.2 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


3 Configure the LoadMaster

When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

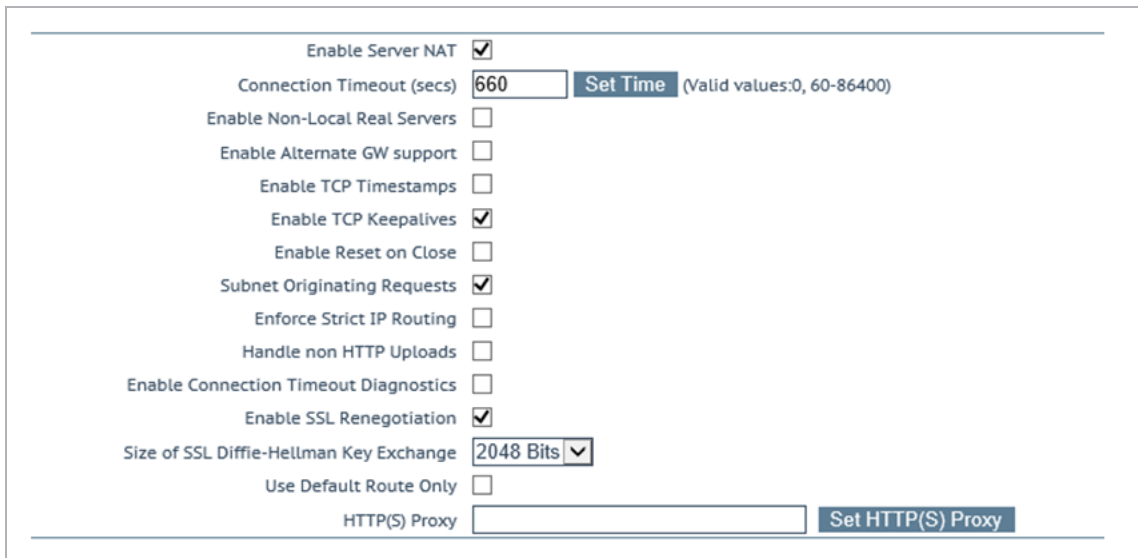

The screenshot shows the 'Network Options' configuration page in the LoadMaster WUI. The following options are visible:

- Enable Server NAT: ☒
- Connection Timeout (secs): [Set Time](#) (Valid values:0, 60-86400)
- Enable Non-Local Real Servers: ☐
- Enable Alternate GW support: ☐
- Enable TCP Timestamps: ☐
- Enable TCP Keepalives: ☒
- Enable Reset on Close: ☐
- Subnet Originating Requests: ☒
- Enforce Strict IP Routing: ☐
- Handle non HTTP Uploads: ☐
- Enable Connection Timeout Diagnostics: ☐
- Enable SSL Renegotiation: ☒
- Size of SSL Diffie-Hellman Key Exchange:
- Use Default Route Only: ☐
- HTTP(S) Proxy: [Set HTTP\(S\) Proxy](#)

2. Select the **Subnet Originating Requests** check box.

4 Configure the Luninis Portal Reencrypted Virtual Service

Follow the steps below to create and configure the recommended settings for the Luminis Portal Reencrypted Virtual Service:

- 1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

Virtual Address

10.154.11.186

Port

443

Service Name (Optional)

Luminis Portal Reenc

Use Template

Select a Template

Protocol

tcp

Cancel

Add this Virtual Service

- 2. Type a valid IP address in the **Virtual Address** text box.
- 3. Type **443** in the **Port** text box.
- 4. Enter a recognizable **Service Name**, for example, **Luminis Portal Reencrypted**.
- 5. Ensure **tcp** is selected as the **Protocol**.
- 6. Click **Add this Virtual Service**.
- 7. Configure the settings as shown in the following table:

Section	Option	Value	Comment
Standard Options	Persistence Mode	Active Cookie	You must enable SSL Acceleration before you can select Active Cookie

4 Configure the Luminis Portal Reencrypted Virtual Service

Section	Option	Value	Comment
	Timeout	1 Hour	
	Cookie name	jsessionid	
	Scheduling Method	least connection	
	Idle Connection Timeout	660	
SSL Properties	SSL Acceleration	Enabled	
	Reencrypt	Selected	
	Supported Protocols	TLS1.0	While this workload may not support TLS1.3 yet, Kemp recommend enabling it for future proofing.
		TLS1.1	
		TLS1.2	
		TLS1.3	
	Cipher Set	BestPractices	
Advanced Properties	Add a Port 80 Redirector VS	https://%h%s	<p>Click Add HTTP Redirector. This automatically creates a redirect on port 80.</p> <p>Note: This field disappears after it is clicked.</p>
Real Servers	Real Server Check Method	HTTPS Protocol	
	Checked Port	443	

8. Add the Real Servers:

- Expand the **Real Servers** section.
- Click **Add New**.
- Type the address of the Real Server.
- Type **443** as the **Port**.
- Click **Add This Real Server**.

f) Repeat the steps above to add more Real Servers as needed, based on the environment.

4.1 Configure the Luminis Portal Reencrypted HTTP Redirect Virtual Service

Clicking the **Add HTTP Redirector** button automatically creates a port 80 redirect Virtual Service. This is optional, but the purpose of this Virtual Service is to redirect any clients who have connected using HTTP to the HTTPS Virtual Service. Kemp also recommends changing the **Real Server Check Method** and **Persistence Mode** to **None**.

Last Updated Date

This document was last updated on 27 July 2023.