



vRealize Automation

Deployment Guide

UPDATED: 27 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

| | |
|---|-----------|
| 1 Introduction | 4 |
| 1.1 Document Purpose | 4 |
| 2 Template | 5 |
| 3 Configure vRealize Automation Virtual Services | 6 |
| 3.1 Enable Subnet Originating Requests Globally | 6 |
| 3.2 vRealize Automation IaaS Web Virtual Service | 7 |
| Last Updated Date | 10 |

1 Introduction

VMware's vRealize Automation provides cloud automation software that facilitates the delivery and management of infrastructure and accelerating the deployment and release of applications. It allows deployment across multi-vendor hybrid cloud infrastructure and greatly reduces the time required to provision services, reducing costs and improving business agility. End-users are given different service levels, policies and automation processes, as appropriate for their needs.

The Kemp LoadMaster is able to load balance the vRealize Automation IaaS Web Server workload. The LoadMaster offers advanced Layer 4 and Layer 7 server load balancing, SSL Acceleration and a multitude of other advanced Application Delivery and Optimization (ADC) features. The LoadMaster intelligently and efficiently distributes user traffic among the application servers so that users get the best experience possible.

1.1 Document Purpose

This document provides guidance on how to deploy vRealize Automation with a Kemp LoadMaster. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined.

The Kemp support site can be found at: <https://support.kemptechnologies.com>.

2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the following page: [LoadMaster Templates](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

3 Configure vRealize Automation Virtual Services

The environment in which vRealize Automation is deployed determines which of the following setups should be used.

3.1 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.


When **Subnet Originating Requests** is enabled, the LoadMaster routes traffic so that the Real Server sees traffic arriving from the LoadMaster interface that is in that network/subnet.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **System Configuration > Miscellaneous Options > Network Options**.

3 Configure vRealize Automation Virtual Services

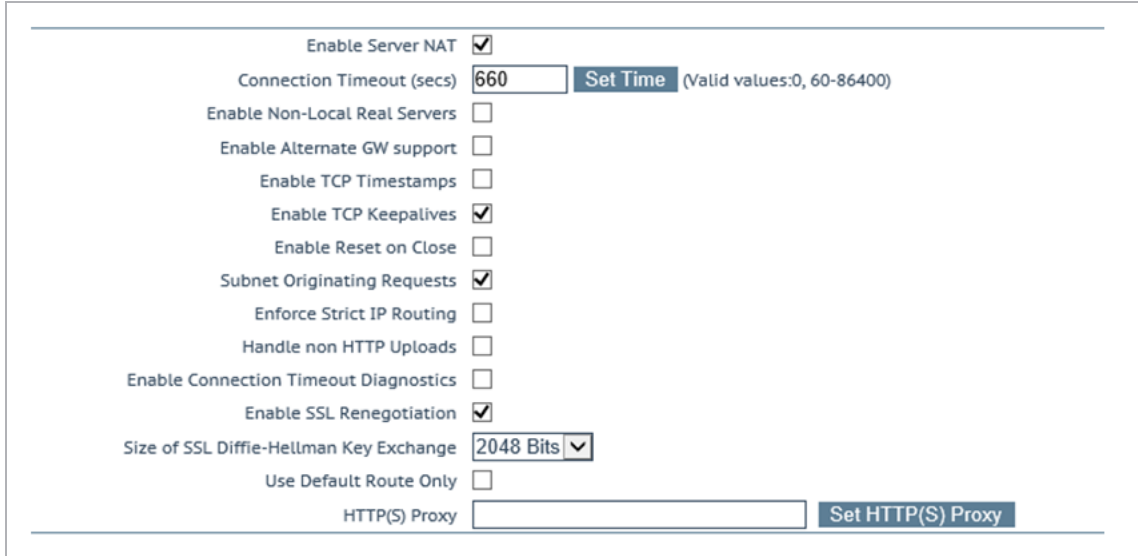

Enable Server NAT ☒

Connection Timeout (secs) [Set Time](#) (Valid values:0, 60-86400)

Enable Non-Local Real Servers ☐

Enable Alternate GW support ☐

Enable TCP Timestamps ☐

Enable TCP Keepalives ☒

Enable Reset on Close ☐

Subnet Originating Requests ☒

Enforce Strict IP Routing ☐

Handle non HTTP Uploads ☐

Enable Connection Timeout Diagnostics ☐

Enable SSL Renegotiation ☒

Size of SSL Diffie-Hellman Key Exchange

Use Default Route Only ☐


HTTP(S) Proxy [Set HTTP\(S\) Proxy](#)

2. Select the **Subnet Originating Requests** check box.

3.2 vRealize Automation IaaS Web Virtual Service

The following are the steps involved and the values required to configure the vRealize Automation VRA VC Web Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

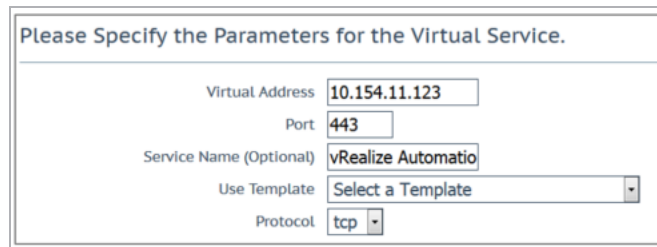

Please Specify the Parameters for the Virtual Service.

Virtual Address

Port

Service Name (Optional)

Use Template

Protocol

2. Enter a valid IP address in the **Virtual Address** text box.
3. Enter **443** in the **Port** text box.
4. Enter a recognizable Service Name, for example **vRealize Automation IaaS Web**.
5. Ensure **tcp** is selected as the **Protocol**.
6. Click **Add this Virtual Service**.

3 Configure vRealize Automation Virtual Services

7. Enter the details shown in the following table:

| Section | Option | Value | Comment |
|----------------------------|-------------------------|---------------------------------|---|
| Standard Options | Transparency | Deselected | |
| | Persistence Mode | Source IP Address | |
| | Timeout | 6 Minutes | |
| | Scheduling Method | Least Connection | |
| | Idle Connection Timeout | 360 | |
| SSL Properties | SSL Acceleration | Enabled Reencrypt | A wildcard certificate allows secure connections to be established with a request URL in the format of *.example.com. With this approach, a single certificate secures traffic for all clients in a multi-tenant environment. |
| | Supported Protocols | TLS1.0 | While this workload may not support TLS1.3 yet, Kemp recommend enabling it for future proofing. |
| | | TLS1.1 | |
| | | TLS1.2 | |
| | | TLS1.3 | |
| | Cipher Set | BestPractices | |
| Advanced Properties | Content Switching | Disabled | |
| | Add HTTP Headers | Legacy Operation (X-ClientSide) | |

3 Configure vRealize Automation Virtual Services

| Section | Option | Value | Comment |
|--------------|--------------------------|---------------------|------------------------|
| Real Servers | Real Server Check Method | HTTPS Protocol | |
| | URL | /wapi/api/statusweb | Click Set URL . |
| | Checked Port | 443 | |
| | HTTP Method | GET | |
| | | | |

Users should note that clicking the Add HTTP Redirector button, automatically creates a redirect Virtual Service on Port 80.

8. Add the Real Servers:

- a) Click the **Add New** button.
- b) Enter the address of the **vRealize Automation IaaS Web** Server.
- c) Enter **443** as the **Port**.

The Real Server Port should match the Virtual Service Port.

The Forwarding method and Weight values are set by default. An administrator can change these.

- d) Click **Add this Real Server**. Click **OK** to the pop-up message.
- e) Repeat the steps above to add more Real Servers as needed, based on the environment.

Last Updated Date

This document was last updated on 27 July 2023.