



SSL for the FIPS LoadMaster

Feature Description

UPDATED: 28 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	5
1.1 Document Purpose	5
1.2 Intended Audience	5
2 Create an SSL Accelerated Virtual Service	6
2.1 Adding an SSL Virtual Service	6
2.2 Adding an SSL Certificate	10
2.3 Checking Certificate Installations	14
2.4 Intermediate Certificates	15
2.5 Importing Intermediate Certificates	15
2.5.1 Invalid Certificate Formats	16
2.6 IIS Certificates	16
2.7 Re-encrypt SSL	17
2.8 Assigning a Client Certificate for Re-encryption	17
2.9 Backup/Restore Certificates	19
2.10 SSL Ciphers	19
2.10.1 Cipher Set Management	22
2.10.2 Certificate Considerations for Various Cipher Suites	23
2.10.2.1 DH-RSA- and DHE-RSA- Cipher Suites	23
2.10.2.2 DH-DSS- and DHE-DSS- Cipher Suites	23
2.10.2.3 ECDH-ECDSA- and ECDHE-ECDSA- Cipher Suites	24
2.11 WUI Root Certificate Installation	24

2.12 OCSP Configuration	25
2.12.1 OCSP Server Settings	26
2.13 Setting the Diffie-Hellman Key Exchange Size	28
3 WUI Options	29
3.1 SSL Properties	29
3.2 Certificates & Security	36
3.2.1 SSL Certificates	36
3.2.2 Intermediate Certificates	37
3.2.3 Generate CSR (Certificate Signing Request)	37
3.2.4 Backup/Restore Certs	39
3.2.5 Cipher Sets	41
3.2.6 Remote Access	43
3.2.7 OCSP Configuration	46
References	48
Last Updated Date	49

1 Introduction

Kemp leads the industry in driving the price/performance value proposition for application delivery and load balancing to levels that our customers can afford. Our products' versatile and powerful architecture provide the highest value, while enabling our customers to optimize their businesses that rely on Internet-based infrastructure to conduct business with their customers, employees and partners.

Kemp products optimize web and application infrastructure as defined by high-availability, high-performance, flexible scalability, security and ease of management. They maximize the total cost-of-ownership for web infrastructure, while enabling flexible and comprehensive deployment options.

1.1 Document Purpose

This document describes various aspects of SSL Accelerated Services using the Kemp LoadMaster. It describes in detail how to configure SSL Accelerated Services using the LoadMaster Web User Interface (WUI).

1.2 Intended Audience

This document is intended to help anyone who wishes to learn about or implement the SSL Accelerated Services within the Kemp LoadMaster.

2 Create an SSL Accelerated Virtual Service

This section will explain how to create a Virtual Service with SSL Acceleration activated.

SSL Acceleration transfers the processing of SSL from the Real Servers to the LoadMaster, meaning that only one certificate is required per Virtual Service.

When SSL Acceleration is enabled, communication from the LoadMaster to the Real Servers is unencrypted.

2.1 Adding an SSL Virtual Service

The process for adding an SSL-enabled Virtual Service is the same for a regular Virtual Service. First, add the Virtual Service. In the main menu of the LoadMaster WUI, select **Virtual Services** and **Add New**. A screen will appear asking to enter the **Virtual Address**, **Port**, **Service Name** and **Protocol**.



Please Specify the Parameters for the Virtual Service.

Virtual Address

Port

Service Name (Optional)

Protocol

The port defaults to port **80**, which is the standard HTTP port. If an SSL-enabled Virtual Service is being created, change the port to **443**, which is the default HTTPS port. Keep the protocol as **tcp**, and click **Add this Virtual Service**.

The Virtual Service properties screen will appear. Among the various sections in this screen is **SSL Properties**.

2 Create an SSL Accelerated Virtual Service

SSL Properties	
SSL Acceleration	Enabled: <input checked="" type="checkbox"/> Reencrypt: <input type="checkbox"/>
Supported Protocols	<input type="checkbox"/> SSLv3 <input type="checkbox"/> TLS1.0 <input checked="" type="checkbox"/> TLS1.1 <input checked="" type="checkbox"/> TLS1.2 <input checked="" type="checkbox"/> TLS1.3
Require SNI hostname	<input type="checkbox"/>
Self Signed Certificate in use.	
Certificates	<div> <div>Available Certificates</div> <div>None Available</div> </div> <div> <div>Assigned Certificates</div> <div>None Assigned</div> </div> <div>Set Certificates</div> <div>Manage Certificates</div>
Ciphers	<div>Cipher Set: Default <div>Modify Cipher Set</div></div> <div>Assigned Ciphers</div> <div> ECDHE-ECDSA-AES256-GCM-SHA384 ECDHE-RSA-AES256-GCM-SHA384 DHE-DSS-AES256-GCM-SHA384 DHE-RSA-AES256-GCM-SHA384 ECDHE-ECDSA-CHACHA20-POLY1305 ECDHE-RSA-CHACHA20-POLY1305 </div>
Client Certificates	No Client Certificates required
Strict Transport Security Header	Don't add the Strict Transport Security Header

To enable SSL for this Virtual Service, select the **Enabled** check box.


A warning will appear saying that a temporary certificate will be used for the service. Click **OK**.

As soon as SSL is enabled, the LoadMaster will install a self-signed certificate for the Virtual Service.

The check boxes in the **Supported Protocols** section allow you to specify which protocols should be supported by the Virtual Service. By default, TLS1.1, TLS1.2, and TLS1.3 protocols are enabled and SSLv3 and TLS1.0 are disabled.

Starting with version 7.2.37, when re-encryption is enabled, the TLS version that can be negotiated between the LoadMaster and the Real Servers behind it are no longer constrained by the TLS version settings configured on the client side. All TLS versions and ciphers that are supported on the LoadMaster can be negotiated without restriction by Real Servers. In this way, the LoadMaster can, for example, provide strict security for client-side application access and still support server-side connections to legacy servers that only support specific, less secure, TLS versions, and ciphers. This is illustrated in the example below.


2 Create an SSL Accelerated Virtual Service

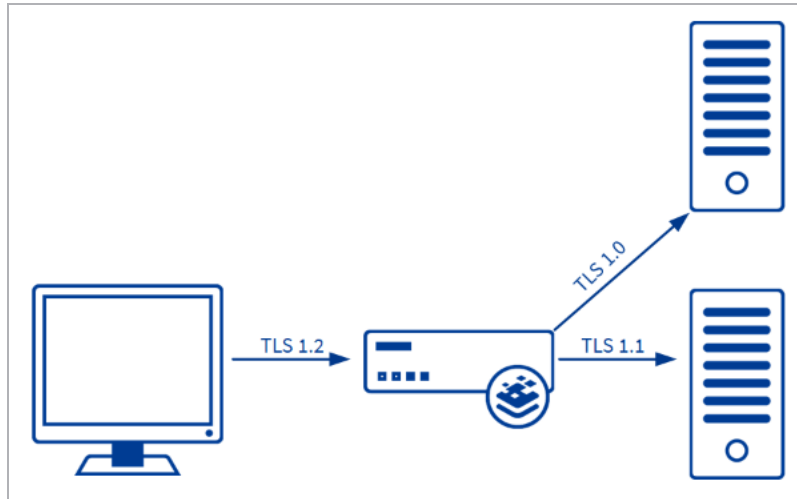

Server connections are only restricted by the configuration of the Real Servers, regardless of the TLS version selected on the client side. Each Real Server can be configured independently of the others. The LoadMaster negotiates connections according to the requirements of each Real Server.

Selecting the require Server Name Identifier (SNI) hostname check box means that the hostname will always be required to be sent in the TLS client hello message.

When **Require SNI hostname** is disabled, the first certificate in the list of **Assigned Certificates** as a host header match is not found.

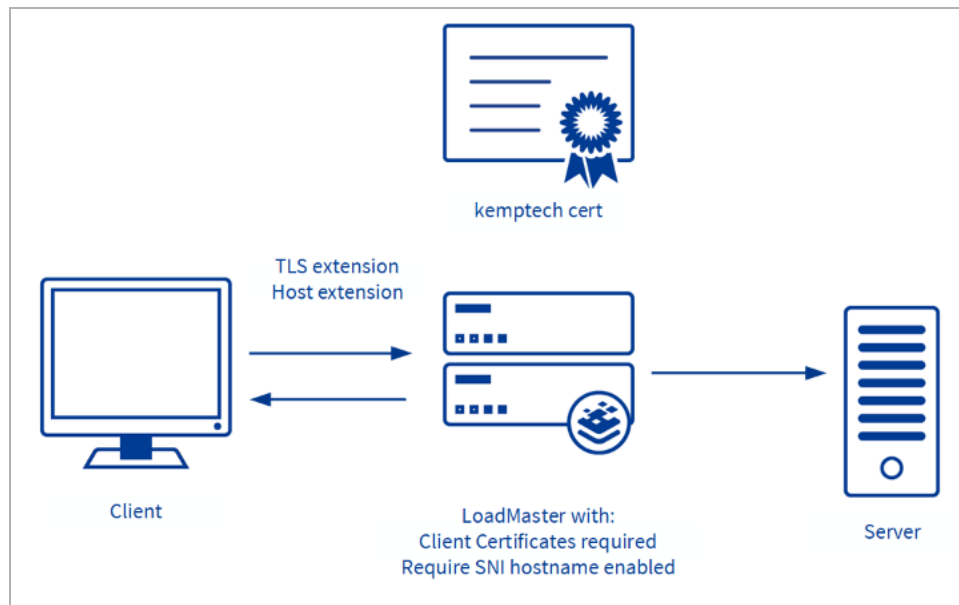

2 Create an SSL Accelerated Virtual Service

When **Require SNI hostname** is enabled, a certificate with a matching host name must be found, otherwise the connection is dropped. This also supports wildcard certificates.

Multiple certificates are supported. Wildcard certificates work regardless of what position they are in. SNI can find certificates by Subject Alternative Name (SAN) when the certificate is not in the first position. SNI will choose the first matching certificate in a list if multiple certificates contain the same name in either the Common Name or SAN name.

When using a Subject Alternative Name (SAN) certificate, alternate source names are not matched against the host header.

Wildcard certificates are supported but please note that the root domain name will not be matched as per RFC 2459. Only anything to the left of the dot will be matched. Additional certificates must be added to match the root domain names. For example, www.kemptechnologies.com will be matched until a wildcard of *.kemptechnologies.com. Kemptechnologies.com will not be matched.

After you have added certificates to the LoadMaster (see the **Adding an SSL Certificate** section) you can assign one or more certificates to the Virtual Service by selecting them in the **Available Certificates** list, clicking the right arrow and clicking the **Set Certificates** button. Both internal and external certificates can be assigned to the same Virtual Service.

There is a limit of 8171 characters when assigning certificates to a Virtual Service using the WUI.

A description of each of the options in the **Client Certificates** drop-down is provided below:

- **No Client Certificates required:** enables the LoadMaster to accept HTTPS requests from any client. This is the recommended option.


By default the LoadMaster will accept HTTPS requests from any client. Selecting any of the other values below will require all clients to present a valid client certificate. In addition, the LoadMaster can also pass information about the certificate to the application.

This option should not be changed from the default of **No Client Certificates required**. Only change from the default

option if you are sure that all clients that access this service have valid client certificates.

- **Client Certificates required:** requires that all clients forwarding a HTTPS request must present a valid client certificate.
- **Client Certificates and add Headers:** requires that all clients forwarding a HTTPS request must present a valid client certificate. The LoadMaster also passes information about the certificate to the application by adding headers.
- The below options send the certificate in its original raw form. The different options let you specify the format that you want to send the certificate in:
 - Client Certificates and pass DER through as SSL-CLIENT-CERT
 - Client Certificates and pass DER through as X-CLIENT-CERT
 - Client Certificates and pass PEM through as SSL-CLIENT-CERT
 - Client Certificates and pass PEM through as X-CLIENT-CERT

Real Servers can be added to this SSL Virtual Service by clicking **Add New** in the **Real Servers** section.

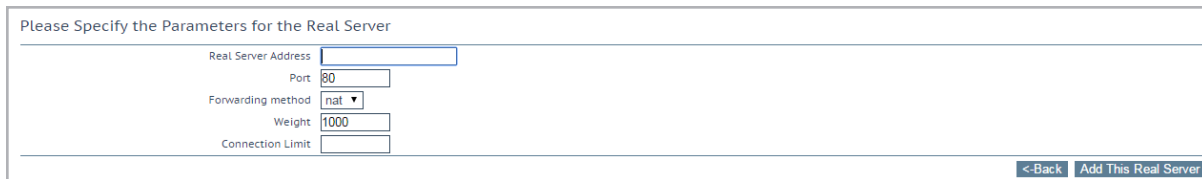

Please Specify the Parameters for the Real Server

Real Server Address	<input type="text"/>
Port	<input type="text" value="80"/>
Forwarding method	<input type="text" value="nat"/>
Weight	<input type="text" value="1000"/>
Connection Limit	<input type="text"/>

[< Back](#) [Add This Real Server](#)

When adding Real Servers, ensure to add them on port **80** (or whatever port that the non-SSL service is running on), and not port 443.

2.2 Adding an SSL Certificate

To add an SSL Certificate, first generate a CSR. A CSR can be created, for submission directly to the signing authority of choice, by using the WUI.

In the main menu of the LoadMaster WUI, go to **Certificates > SSL Certificates**. Enter a Private Key Identifier and click **Generate CSR**.

2 Create an SSL Accelerated Virtual Service

All Fields are optional except "Common Name"

2 Letter Country Code (ex. US)	<input type="text"/>
State/Province (Full Name - New York, not NY)	<input type="text"/>
City	<input type="text"/>
Company	<input type="text"/>
Organization (e.g., Marketing, Finance, Sales)	<input type="text"/>
Common Name (The FQDN of your web server)	<input type="text"/>
Email Address	<input type="text"/>
SAN/UCC Names	<input type="text"/>
Generate Elliptic Curve Request	<input type="checkbox"/>

Cancel **Reset** **Create CSR**

Fill out the form and create the CSR and private key by clicking the **Create CSR** button.

If you have the CA certificate generated using the step above , or have a custom self-signed certificate, this can be added to the Virtual Service through the WUI.

SSL Properties

SSL Acceleration

Enabled: ☒ Reencrypt: ☐

Supported Protocols

☐ SSLv3 ☒ TLS1.0 ☒ TLS1.1 ☒ TLS1.2

Require SNI hostname

☐

Self Signed Certificate in use.

Available Certificates

None Available

Assigned Certificates

None Assigned

Set Certificates

Manage Certificates

Cipher Set

Default

Modify Cipher Set

Assigned Ciphers

ECDHE-RSA-AES256-GCM-SHA384

ECDHE-ECDSA-AES256-GCM-SHA384

ECDHE-RSA-AES256-SHA384

ECDHE-ECDSA-AES256-SHA384

ECDHE-RSA-AES256-SHA

ECDHE-ECDSA-AES256-SHA

Client Certificates

No Client Certificates required

There is a button called **Manage Certificates** that you can click to add an (RSA or EC) SSL certificate.

2 Create an SSL Accelerated Virtual Service

Layer	Certificate Installed
L7	Add New
L7	Add New

There is also an **Add New** button in the **View/Modify Services** screen in the **Certificates Installed** column.

Private Key Identifier:

Generate CSR

Private Key	Common Name(s)	Virtual Services	Assignment	Operation
ExampleCert	Example.com (Expires: Sep 1 12:20:38 2020 GMT)	Available VSS 172.21.11.11:443	Assigned VSS None Assigned	Import Certificate Delete Key Show Reencrypt Certs

Save Changes

Either route opens the same screen; the screen to input the certificate information.

At this point there are two options; **Add Intermediate** and **Import Certificate**.

Add Intermediate

Add a new Intermediate Certificate

Intermediate Certificate

Choose File

No file chosen

Certificate Name

Add Certificate

Clicking this button will allow you to add an intermediate certificate as a temporary measure. Browse to where the file is stored, enter the desired name in the **Desired File Name** field and click the **Add Certificate** button.

Import Certificate

When using FIPS in HA mode, ensure to only import certificates when both nodes are up.

Private Key	Common Name(s)	Virtual Services	Assignment	Operation
Example	CSR generated	Available VSS 172.21.11.11:443	Assigned VSS None Assigned	Import Certificate Delete Key Show Reencrypt Certs

Save Changes

An entry for the CSR previously generated will be available with the status **CSR generated** in red font under the **Virtual Services** column. Click **Import Certificate** on the right.

2 Create an SSL Accelerated Virtual Service

Please supply the file containing the Signed Certificate for Example

Signed Public Certificate File No file chosen

Click **Choose File** to select the signed certificate and click **Submit**.

A dialog informing you that the certificate installed successfully should appear.

Private Key	Common Name(s)	Virtual Services	Assignment
ExampleCert	Example.com [Expires: Sep 1 12:20:38 2020 GMT]	Available VSs None Assigned	Assigned VSs 172.21.11.11:443

The certificate can then be assigned to a Virtual Service(s) by selecting the relevant IP address(s) in the **Available VSs** list, clicking the right arrow and clicking **Save Changes**.

SSL Properties

SSL Acceleration Enabled: ☒ Reencrypt: ☐

Self Signed Certificate in use.

Certificates

Available Certificates: Example

Assigned Certificates: None Assigned

Cipher Set: Default

Assigned Ciphers

- ECDHE-RSA-AES256-SHA384
- ECDHE-ECDSA-AES256-SHA384
- DHE-RSA-AES256-SHA256
- DHE-DSS-AES256-SHA256
- ECDH-RSA-AES256-SHA384
- ECDH-ECDSA-AES256-SHA384

Client Certificates: No Client Certificates required

Certificates can also be assigned to a Virtual Service within the **Modify Virtual Service** screen.

If you add a certificate to the LoadMaster in version 7.2.51 or later (or in 7.2.48.3 LTS or a later LTS version) and then downgrade to 7.2.50 or an earlier version (or 7.2.48.2 LTS or an earlier version)

- the certificate will not work. To work around this, create a backup of all SSL certificates before downgrading and then restore the certificates after downgrading (**Certificates & Security > Backup/Restore Certs**). If you forget to take the backup before downgrading: upgrade the firmware again, take the certificate backup, downgrade, and then restore the certificate backup.

2.3 Checking Certificate Installations

Some browsers have functionality that allows a check of the nature of the certificate installed on the website being connecting to. This can be useful when troubleshooting a certificate problem.

When browsing an SSL site, HTTPS should be displayed in the address and there may be an icon signifying a secure link (a padlock icon).



The icon can be clicked to see information about the certificate that is used with that SSL site.

2.4 Intermediate Certificates

Some certificates issued by Certificate Authorities require a third certificate, often referred to as an intermediate certificate. This additional certificate provides a chain path from the CA to the certificate issued to your site.

While some CAs use intermediate certificates, others do not. If you have questions on whether or not you should have received an intermediate certificate from your CA vendor, contact your CA vendor.

If a CA certificate has been installed, and an SSL error appears when browsing the Virtual Service, it is likely that an intermediate certificate needs to be installed.

Uploading several consecutive intermediate certificates within a single piece of text, as practiced by some certificate vendors such as GoDaddy, is allowed. The uploaded file is split into individual certificates.

2.5 Importing Intermediate Certificates

Installing an intermediate certificate is simple to do through the WUI. First, obtain the intermediate certificate from the CA. This can usually be found on their web site, and is usually in a text window to make it easier to cut and paste.

Your CA vendor may have provided the required intermediate certificates in the same bundle as the certificate itself, and so these would be installed together. The method documented in this section should be used when you are installing one or more intermediate certificates alone.

The intermediate certificate formats that are officially supported by the LoadMaster are: .PEM, .CER, and .CRT.

A CER file can only be encoded and exported in Base-64 format for it to be uploaded to the LoadMaster. A CER file exported in a DER binary format is not supported on the LoadMaster and the LoadMaster is unable to upload this format.

This section provides steps on how to apply and upload intermediate certificates and how to resolve any invalid certificate formats.

To import an intermediate certificate to the LoadMaster complete the following steps:

1. Navigate to **Certificates & Security > Intermediate Certs** in the main menu.

2 Create an SSL Accelerated Virtual Service

Add a new Intermediate Certificate

Intermediate Certificate	<input type="button" value="Choose File"/>	No file chosen
Certificate Name	<input type="text" value="Example Intermediate Certific"/>	<input type="button" value="Add Certificate"/>

2. Click **Choose File**.
3. Browse to and select the required intermediate certificate file.
4. Enter the **Certificate Name**. This name is used on the LoadMaster to help you manage your certificates.
5. Click **Add Certificate**.
6. Click **OK**.

These intermediate certificates do not need to be associated with any Virtual Service certificates. The LoadMaster automatically builds the required certificate chain.

Also, only one intermediate certificate is required per CA. If several certificates have been installed from VeriSign, for instance, you only need to install the VeriSign intermediate certificate once.

2.5.1 Invalid Certificate Formats

If you follow the steps to upload an intermediate certificate to the LoadMaster and receive a **Certificate Format Invalid** error, it means the certificate file you are trying to upload is unsupported or is not in one of the formats required by LoadMaster (PEM, CER, CRT).

The standard PEM file format can be uploaded to the LoadMaster.

2.6 IIS Certificates

This section outlines how to migrate SSL from Microsoft Internet Information Services (IIS) to the LoadMaster.

When putting a LoadMaster in a situation where a Microsoft IIS server was previously performing SSL, there is an option to import the IIS certificate into the LoadMaster. This SSL certificate can be migrated from Microsoft IIS to the LoadMaster by completing two simple tasks. The first task is to export the SSL certificate from the IIS using Microsoft export tools; ensure to export the certificate and private key as a Personal Information Exchange File (PFX). The second step is to import the PFX file into the LoadMaster using the LoadMaster WUI. To start the import process on the LoadMaster simply click the **Add New** button in the SSL enabled Virtual Service and install the certificate as per the instructions in the **Adding an SSL Certificate** section.

2.7 Re-encrypt SSL

With SSL acceleration, the SSL session is terminated at the LoadMaster, and sent to the Real Servers unencrypted. In some security situations, it may be necessary to encrypt the connection between the LoadMaster and Real Servers. This can be done with reencrypt SSL.

With reencrypt SSL, the SSL session is first terminated at the LoadMaster. Persistence and other Layer 7 functionality can then be performed. After that, the traffic is re-encrypted in a new SSL session between the LoadMaster and the Real Server.

SSL Properties	
SSL Acceleration	Enabled: <input checked="" type="checkbox"/> Reencrypt: <input checked="" type="checkbox"/>
Supported Protocols	<input type="checkbox"/> SSLv3 <input checked="" type="checkbox"/> TLS1.0 <input checked="" type="checkbox"/> TLS1.1 <input checked="" type="checkbox"/> TLS1.2
Require SNI hostname	<input type="checkbox"/>
Certificates	<p>Self Signed Certificate in use.</p> <div> <div>Available Certificates</div> <div>ExampleCertificate [Example]</div> </div> <div> <div>Assigned Certificates</div> <div>None Assigned</div> </div> <div>Set Certificates</div> <div>Manage Certificates</div>
Ciphers	<p>Cipher Set: Default <div>Modify Cipher Set</div></p> <p>Assigned Ciphers</p> <div> <div>ECDHE-RSA-AES256-GCM-SHA384</div> <div>ECDHE-ECDSA-AES256-GCM-SHA384</div> <div>ECDHE-RSA-AES256-SHA384</div> <div>ECDHE-ECDSA-AES256-SHA384</div> <div>ECDHE-RSA-AES256-SHA</div> <div>ECDHE-ECDSA-AES256-SHA</div> </div>
Client Certificates	No Client Certificates required
Reencryption Client Certificate	None required
Reencryption SNI Hostname	<div></div> <div>Set SNI Hostname</div>

This is turned on by a single option in the properties screen of a Virtual Service in the SSL section.

2.8 Assigning a Client Certificate for Re-encryption

It is possible to require client certificates when SSL re-encryption is enabled. To assign a client certificate for re-encryption, follow the steps below:

1. In the main menu of the LoadMaster WUI, go to **Certificates & Security > SSL Certificates**.

2 Create an SSL Accelerated Virtual Service

Operation	
	New CSR
	Replace Certificate
	Delete Certificate
	Reencryption Usage

2. Click **Reencryption Usage** on the relevant certificate.

Identifier	Common Name(s)	Virtual Services	Assignment
ExampleCertificate	Example [Expires: Aug 24 09:11:21 2016 GMT]		<div>Available VSs</div> <div>10.154.11.61:80 10.154.11.62:80</div> <div>Assigned VSs</div> <div>None Assigned</div> <div>> <</div> <div>Save Changes</div>
VSs using ExampleCertificate for Reencryption			<div>Available VSs</div> <div>None Assigned</div> <div>Assigned VSs</div> <div>10.154.11.61:80</div> <div>> <</div> <div>Save Changes</div>

- 3. Select the relevant IP address from the **Available VSs** box.
- 4. Click the right arrow.
- 5. Click **Save Changes**.

2 Create an SSL Accelerated Virtual Service

SSL Properties	
SSL Acceleration	Enabled: <input checked="" type="checkbox"/> Reencrypt: <input checked="" type="checkbox"/>
Supported Protocols	<input type="checkbox"/> SSLv3 <input checked="" type="checkbox"/> TLS1.0 <input checked="" type="checkbox"/> TLS1.1 <input checked="" type="checkbox"/> TLS1.2 <input checked="" type="checkbox"/> TLS1.3
Require SNI hostname	<input type="checkbox"/>
Certificates	<p>Self Signed Certificate in use.</p> <div> <div>Available Certificates</div> <div>None Available</div> </div> <div> <div>Assigned Certificates</div> <div>None Assigned</div> </div> <div>Set Certificates</div> <div>Manage Certificates</div>
Ciphers	<p>Cipher Set: Default Modify Cipher Set</p> <p>Assigned Ciphers</p> <div> <div> ECDHE-ECDSA-AES256-GCM-SHA384 ECDHE-RSA-AES256-GCM-SHA384 DHE-DSS-AES256-GCM-SHA384 DHE-RSA-AES256-GCM-SHA384 ECDHE-ECDSA-CHACHA20-POLY1305 ECDHE-RSA-CHACHA20-POLY1305 </div> </div>
Client Certificates	No Client Certificates required
Reencryption Client Certificate	None required
Reencryption SNI Hostname	<input type="text"/> Set SNI Hostname
Strict Transport Security Header	Don't add the Strict Transport Security Header
Intermediate Certificates	<p>Using all installed Intermediate certificates</p> <p>Show Intermediate Certificates</p>

The **Reencryption Client Certificate** is displayed in the **SSL Properties** section of the relevant Virtual Service.

2.9 Backup/Restore Certificates

The FIPS LoadMaster supports exporting of intermediate certificates. The export file is designed to be used for import into the same FIPS LoadMaster and is encrypted. You can export and import certificates using the WUI at **Certificates > Backup/Restore Certs**. Ensure to note the passphrase used to create the export because it is required to complete the import.

2.10 SSL Ciphers

The LoadMaster supports SSLv3, TLS1.0, TLS1.1, TLS1.2, and TLS1.3.

Ciphers define how the data stream is encrypted. The LoadMaster supports ciphers supporting perfect forward secrecy and Elliptic Curve.

2 Create an SSL Accelerated Virtual Service

SSL Properties

SSL Acceleration

Enabled: ☒ Reencrypt: ☐

Supported Protocols

☐ SSLv3
☐ TLS1.0
☒ TLS1.1
☒ TLS1.2
☒ TLS1.3

Require SNI hostname

☐

Self Signed Certificate in use.

Available Certificates

None Available

Assigned Certificates

None Assigned

Set Certificates

Manage Certificates

Cipher Set

Default

Modify Cipher Set

Assigned Ciphers

ECDHE-ECDSA-AES256-GCM-SHA384
ECDHE-RSA-AES256-GCM-SHA384
DHE-DSS-AES256-GCM-SHA384
DHE-RSA-AES256-GCM-SHA384
ECDHE-ECDSA-CHACHA20-POLY1305
ECDHE-RSA-CHACHA20-POLY1305

Client Certificates

No Client Certificates required

Strict Transport Security Header

Don't add the Strict Transport Security Header

Each Virtual Service (which has **SSL Acceleration** enabled) has a cipher set assigned to it. This can either be one of the system-defined cipher sets or a user-customized cipher set. The system-defined cipher sets can be selected to quickly and easily select and apply the relevant ciphers.

A cipher set also needs to be assigned to the LoadMaster WUI. To set the WUI cipher set, go to **Certificates & Security > Admin WUI Access**.

CHACHA20-POLY1305 ciphers are given special preference when they appear in both the client and LoadMaster cipher lists. If these ciphers appear at the top of the client preference list, the LoadMaster will prioritize using CHACHA20-POLY1305 ciphers for the connection, regardless of the position of these ciphers in the LoadMaster's cipher list.

The **Backward_compatibility** cipher set should be used as a last resort only.

To find out what ciphers are in each cipher set, go to **Certificates & Security > Cipher Sets**. Select the relevant **Cipher Set**. Two lists are displayed – **Available Ciphers** and **Assigned Ciphers**. These lists can be filtered by typing some text into the **Filter** text boxes provided. The **Filter** text boxes will only allow you to enter valid text which is contained in the cipher names, for example ECDHE. If invalid text is entered, the text box will turn red and the invalid text is deleted.

2 Create an SSL Accelerated Virtual Service

Ciphers can be dragged and dropped to/from the **Available** and **Assigned** lists as needed. Ciphers which are already assigned will appear grayed out in the **Available Ciphers** list.

Each Virtual Service (which has **SSL Acceleration** enabled) has a cipher set assigned to it. This can either be a system-defined cipher set or a user-customized cipher set. A system-defined cipher set can be selected to quickly and easily select and apply the relevant ciphers.

In the FIPS LoadMaster, there are three system-defined cipher sets; **WUI**, **Default** and **BestPractices**. Each of these cipher sets only contain ciphers that are supported by FIPS.

The list of ciphers which are assigned to a Virtual Service can be edited by clicking the **Modify** Cipher Set button. If changes are made to a preconfigured cipher set, a new custom cipher set will be created. Custom cipher sets can be named and can be used across different Virtual Services.

By default, the name for the custom cipher set will be **Custom_<VirtualServiceID>**. Kemp recommends changing the name of custom cipher sets because if another system-defined cipher set is modified, the name will again default to **Custom_<VirtualServiceID>** and will overwrite any existing cipher sets with that name.

It is not possible to modify the list of ciphers in a system-defined cipher set. Instead, a new custom cipher set will be created when changes are made to the ciphers list.

2.10.1 Cipher Set Management

Cipher Set Management

Cipher Set Default

Available Ciphers

Filter:

Name	Strength
ECDHE-RSA-AES256-GCM-SHA384	High
ECDHE-ECDSA-AES256-GCM-SHA384	High
ECDHE-RSA-AES256-SHA384	High
ECDHE-ECDSA-AES256-SHA384	High
ECDHE-RSA-AES256-SHA	High
ECDHE-ECDSA-AES256-SHA	High
DH-DSS-AES256-GCM-SHA384	High
DHE-DSS-AES256-GCM-SHA384	High
DH-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-SHA256	High
DHE-DSS-AES256-SHA256	High
DH-RSA-AES256-SHA256	High
DH-DSS-AES256-SHA256	High

Assigned Ciphers

Filter:

Name	Strength
ECDHE-RSA-AES256-GCM-SHA384	High
ECDHE-ECDSA-AES256-GCM-SHA384	High
ECDHE-RSA-AES256-SHA384	High
ECDHE-ECDSA-AES256-SHA384	High
ECDHE-RSA-AES256-SHA	High
ECDHE-ECDSA-AES256-SHA	High
DH-DSS-AES256-GCM-SHA384	High
DHE-DSS-AES256-GCM-SHA384	High
DH-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-SHA256	High
DHE-DSS-AES256-SHA256	High
DH-RSA-AES256-SHA256	High
DH-DSS-AES256-SHA256	High

Save as: Default

Save

Two lists are displayed – **Available Ciphers** and **Assigned Ciphers**. These lists can be filtered by typing some text into the **Filter** text boxes provided. The **Filter** text boxes will only allow you to enter valid text which is contained in the cipher names, for example **ECDHE**. If invalid text is entered, the text box will turn red and the invalid text is deleted.

Ciphers can be dragged and dropped to/from the **Available** and **Assigned** lists as needed. Ciphers which are already assigned will appear greyed out in the **Available Ciphers** list.

Changes cannot be made to a preconfigured cipher set. However, you can start with a preconfigured cipher set – make any changes as needed and then save the cipher set with a new custom name.

Enter the new name in the **Save as** text box and click the **Save** button. Custom cipher sets can be used across different Virtual Services and can be assigned as the WUI cipher set.

It is not possible to delete preconfigured cipher sets. However, custom cipher sets can be deleted by selecting the relevant custom cipher set and clicking the **Delete Cipher set** button.

The RC4-MND5 SSLv3 and RC4-MND5 SSLv3 ciphers are not supported for WUI connections (this is to improve security).

The RC4 ciphers are supported with (and can be assigned to) Virtual Services if needed.

2.10.2 Certificate Considerations for Various Cipher Suites

When you create or request SSL certificates to be used in combination with a particular cipher suite, you must be aware of the following:

- Different cipher suites require different signing algorithms to be used when creating server and client certificates.
- Some cipher suites are designed to reject self-signed certificates, as an added level of security.

The following sections outline specific requirements for various cipher suites supported by the LoadMaster.

This information is not specific to the LoadMaster, but to the design of the cipher suites themselves.

2.10.2.1 DH-RSA- and DHE-RSA- Cipher Suites

This section applies to all ciphers with names beginning:

- **DH-RSA-**
- **DHE-RSA-**

As indicated in the names, these ciphers require RSA signing to be used in certificates. Additionally, the certificate cannot be a self-signed certificate. Therefore, when creating a Certificate Signing Request (CSR) for a certificate to be used with this cipher, ensure to specify an RSA-signed certificate.

2.10.2.2 DH-DSS- and DHE-DSS- Cipher Suites

This section applies to all ciphers with names beginning:

- **DH-DSS-**
- **DHE-DSS-**

As indicated in the names, these ciphers require DSS (also known as DSA) signing to be used in certificates. Additionally, the certificate cannot be a self-signed certificate. Therefore, when creating a CSR for a certificate to be used with this cipher, ensure to specify a DSS-signed certificate.

2.10.2.3 ECDH-ECDSA- and ECDHE-ECDSA- Cipher Suites

This section applies to all ciphers with names beginning:

- **ECDH-ECDSA-**
- **ECDHE-ECDSA-**

As implied by the names, these ciphers require an ECDSA certificate, but it can be self-signed.

For these ciphers, the following openssl command line example from a Linux system creates a self-signed certificate for testing with the proper SSL options. The second command concatenates the key and certificate into a single file for input into the LoadMaster WUI.

```
openssl ecparam -name secp521r1 -param_enc named_curve -genkey -out private-key.pem  
openssl req -new -x509 -key private-key.pem -out server-pub.pem -days 730
```


```
cat private-key.pem server-pub.pem > server.pem
```

The **-param_enc explicit** option must not be used in the command line above, or the resulting certificate will be rejected when used to negotiate a secure connection.

If you plan to use a certificate signed by a Certificate Authority (CA), ensure to specify an ECDSA-signed certificate when creating a CSR for a certificate to be used with this cipher.

2.11 WUI Root Certificate Installation

By default the LoadMaster uses a self-signed certificate to ensure secure administrative access to the WUI. However, most modern browsers will display a warning when such a certificate is used.

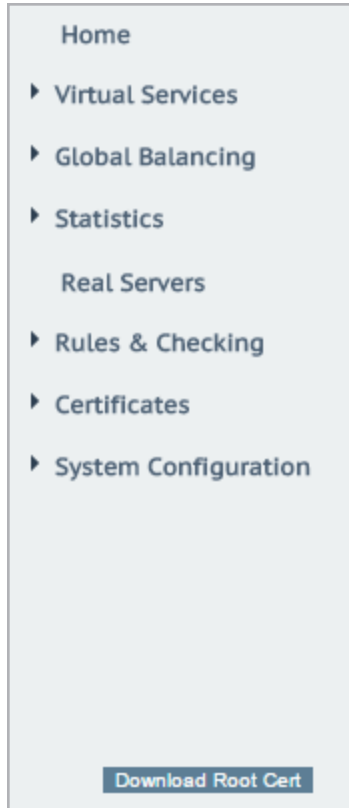

In order to eliminate this warning, the LoadMaster certificate can be installed by clicking the **Download Root Cert** button in the main menu on the **Home** page, when you first access the WUI in a browser.

If this button is not visible, go to the WUI **Home** and refresh the page.

This will download the certificate file that can be installed on the browser so that the security warning can be avoided.

2.12 OCSP Configuration

A Common Access Card (CAC) is a smart card used for identification of active-duty military personnel, selected reserve, US Department of Defence (DoD) civilian employees and eligible contractor personnel. In addition to providing physical access to buildings and protected areas, it also allows access to DoD computer networks and systems satisfying two-factor authentication, digital security and data encryption. It leverages a Public Key Infrastructure (PKI) Security Certificate to verify a cardholder's identity prior to allowing access to protected resources.

2 Create an SSL Accelerated Virtual Service

The Edge Security Pack (ESP) feature of the Kemp LoadMaster supports integration with DoD environments, leveraging CAC authentication and Active Directory application infrastructures. The LoadMaster acts on behalf of clients presenting X.509 certificates using CAC and becomes the authenticated Kerberos client for services.

The request for and presentation of the client certificate happens during initial SSL session establishment. There are two core elements to the process of a user gaining access to an application with CAC:

- Authentication – occurs during SSL session establishment and entails:
 - Verifying the certificate date
 - Verifying revocation status using Online Certificate Status Protocol (OCSP)
 - Verifying the full chain to the Certificate Authority (CA)
- Authorization – occurs after SSL session establishment and the matching of the certificate Subject Alternative Name (SAN) against the User Principal Name (UPN) of the appropriate principal in Active Directory.

For more information, refer to the [DoD Common Access Card \(CAC\) Authentication, Feature Description](#) document.

2.12.1 OCSP Server Settings

The OCSP server settings can be set in the LoadMaster WUI in **Certificates & Security > OCSP Configuration**.

OCSP Server Settings

OCSP Server

10.11.0.35

Set Address

OCSP Server Port

443

Set Port

OCSP URL

/

Set Path

Use SSL

☐

Allow Access on Server Failure

☐

OCSP Server

The address of the OCSP server.

OCSP Server Port

The port of the OCSP server.

OCSP URL

2 Create an SSL Accelerated Virtual Service

The URL to access on the OCSP server.

Use SSL

Select this to use SSL to connect to the OCSP server.

Allow Access on Server Failure

Treat an OCSP server connection failure or timeout as if the OCSP server had returned a valid response, that is, treat the client certificate as valid.

OCSP Checking

Enable OCSP Checking

☐

OCSP Checking

Select the **Enable OCSP Checking** check box to enable the LoadMaster to perform OCSP checks on certain outbound connections. This is disabled by default.

OCSP Stapling

Enable OCSP Stapling

☐

OCSP Refresh Interval

1 Hour ▼

Enable OCSP Stapling

Select this check box to enable the LoadMaster to respond to OCSP stapling requests. If a client connects using SSL and asks for an OCSP response, this is returned. Only Virtual Service certificates are validated. The system holds a cache of OCSP responses that are sent back to the client. This cache is maintained by the OCSP daemon. When the OCSP daemon sends a request to the server, it uses the name specified in the certificate (in the **Authority Information Access** field). If it cannot resolve this name, then it uses the default OCSP server specified in the **OCSP Server** text box.


OCSP Refresh Interval

Specify how often the LoadMaster should refresh the OCSP stapling information. The OCSP daemon caches the entry for up to the amount of time specified here, after which it is refreshed. Valid values range from 1 hour (default) to 24 hours.

2.13 Setting the Diffie-Hellman Key Exchange Size

The Diffie-Helman Key Exchange Size is set to **2048 Bits** by default in the LoadMaster. This can be changed if needed. To change the Diffie-Hellman Key Exchange Size, follow the steps below:

1. In the main menu of the LoadMaster WUI, go to **System Configuration > Miscellaneous Options > Network Options**.

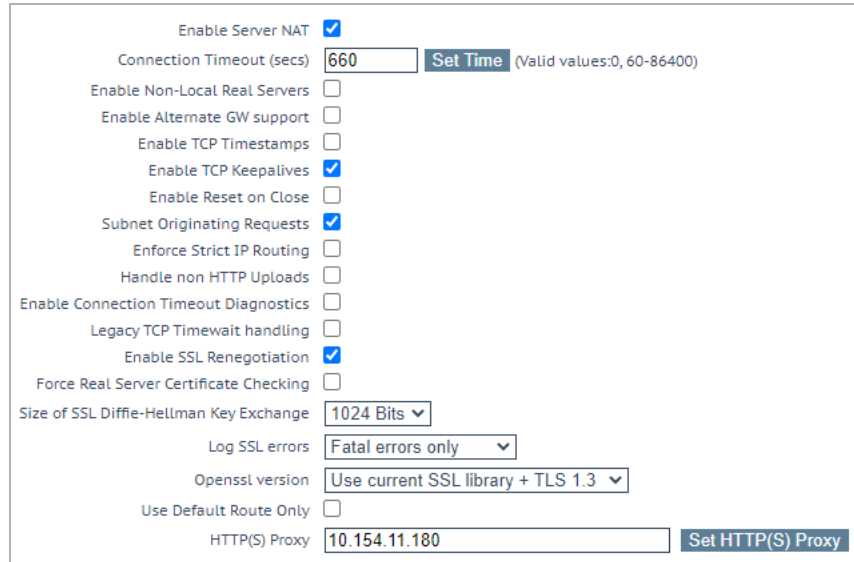

The screenshot shows the 'Network Options' configuration page. The 'Size of SSL Diffie-Hellman Key Exchange' dropdown menu is currently set to '1024 Bits'. Other visible settings include 'Enable Server NAT' (checked), 'Connection Timeout (secs)' (660), 'Enable TCP Keepalives' (checked), 'Subnet Originating Requests' (checked), 'Enable SSL Renegotiation' (checked), 'Log SSL errors' (Fatal errors only), 'Openssl version' (Use current SSL library + TLS 1.3), and 'HTTP(S) Proxy' (10.154.11.180).

2. Select the relevant option in the **Size of Diffie-Helman Key Exchange** drop-down list. Available values are:


- 512 Bits
- 1024 Bits
- 2048 Bits

3. A reboot is required to apply the change. To reboot the LoadMaster, go to **System Configuration > System Administration > System Reboot** and click **Reboot**.

3 WUI Options

This section provides a description for each of the WUI options relating to SSL.

3.1 SSL Properties

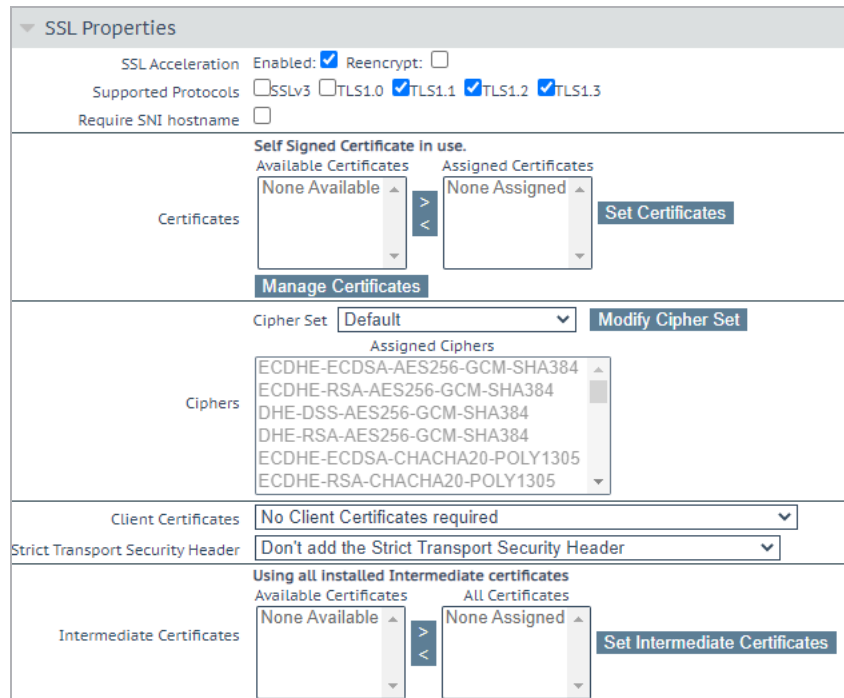

SSL Acceleration

This check box appears when the criteria for SSL Acceleration have been met. Select this check box to activate **SSL Acceleration**.

Enabled: If the **Enabled** check box is selected and there is no certificate for the Virtual Service, you are prompted to install a certificate. You can add a certificate by clicking **Manage Certificates** and importing or adding a certificate.

Reencrypt: Selecting the **Reencrypt** check box re-encrypts the SSL data stream before sending it to the Real Server.

You cannot use **Extra Ports** or **Transparency** with SSL reencryption.

3 WUI Options


Reversed: Selecting this check box means that the data from the LoadMaster to the Real Server is re-encrypted. The input stream must not be encrypted, for example, the client sends HTTP port 80 traffic to the LoadMaster and the LoadMaster sends HTTPS port 443 traffic to the Real Server. This is only useful in connection with a separate Virtual Service which decrypts SSL traffic then uses this Virtual Service as a Real Service and loops data back to it. In this way, the client to Real Server data path is always encrypted on the wire.

Supported Protocols

The check boxes in the **Supported Protocols** section enable you to specify which protocols are supported by the Virtual Service. By default, TLS1.1, TLS1.2, and TLS1.3 are enabled and SSLv3 and TLS1.0 are disabled.

The **TLS1.3** check box will not be visible if the **OpenSSL Version** setting in **System Configuration > Miscellaneous Options > Network Options** is set to **Use older SSL library - no TLS 1.3**. For further details, refer to the **Network Options** section for further details.

Starting with version 7.2.37, when re-encryption is enabled, the TLS version that can be negotiated between the LoadMaster and the Real Servers behind it are no longer constrained by the TLS version settings configured on the client side. All TLS versions and ciphers that are supported on the LoadMaster can be negotiated without restriction by Real Servers. In this way, the LoadMaster can, for example, provide strict security for client-side application access and still support server-side connections to legacy servers that only support specific, less secure, TLS versions, and ciphers. This is illustrated in the example below.

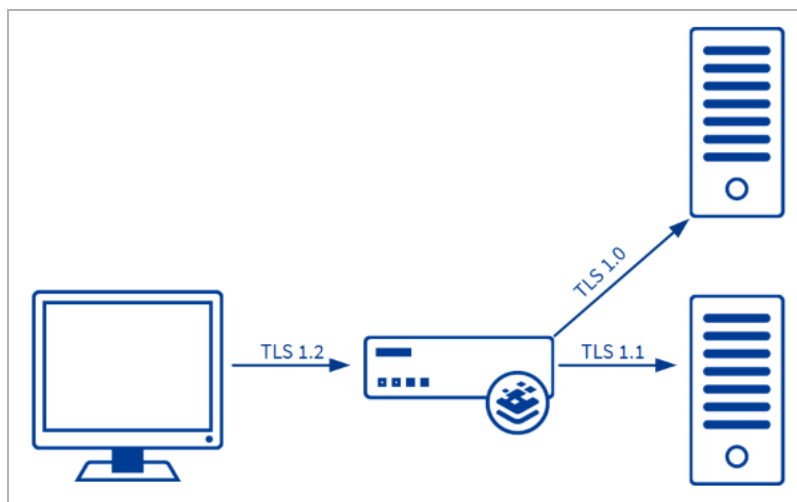

Server connections are only restricted by the configuration of the Real Servers, regardless of the TLS version selected on the client side. Each Real Server can be configured independently of the others. The LoadMaster negotiates connections according to the requirements of each Real Server.

Require SNI hostname

If require Server Name Indication (SNI) is selected, the hostname is always required to be sent in the TLS client hello message.

When **Require SNI hostname** is disabled, the first certificate is used if a host header match is not found.

When **Require SNI hostname** is enabled, a certificate with a matching common name must be found, otherwise an SSL error is yielded. Wildcard certificates are also supported with SNI.

When using a Subject Alternative Name (SAN) certificate, alternate source names are not matched against the host header.

Wildcard certificates are supported but note that the root domain name is not matched, as per RFC 2459. Only anything to the left of the dot is matched. Additional certificates must be added to match the root domain names. For example, www.kemptechnologies.com is matched until a wildcard of *.kemptechnologies.com. Kemptechnologies.com is not matched.

To send SNI host information in HTTPS health checks, enable **Use HTTP/1.1** in the **Real Servers** section of the relevant Virtual Service(s) and specify a host header. If this is not set, the IP address of the Real Server is used.

Certificates

Available certificates are listed in the **Available Certificates** select list on the left. To assign or unassign a certificate, select it and click the right or left arrow button. Then click **Set Certificates**. Multiple certificates can be selected by holding **Ctrl** on your keyboard and clicking each required certificate.

There is a limit of 8171 characters when assigning certificates to a Virtual Service using the WUI.

A Virtual Service can be configured using both RSA and ECC certificates. However, if an RSA and an ECC certificate have the same common name, for example, kemp.com, the first certificate is preferred. If the ECC certificate is first in the list, and a client does not have an ECC cipher, the connection fails. Conversely, if the RSA certificate is first in the list, and a client does not have an RSA cipher, the connection fails.

The total number of certificates that you can add to a Virtual Service is 256, but this number may be further limited by the size of the certificate file names used. In LMOS Version 7.2.47 and later releases, the number of characters in each certificate file name and extension (not counting the period between them), plus all spaces used to separate multiple file names, must add up to 8176 characters or less (in earlier releases, the limitation is 1023 characters.)

Clicking **Manage Certificates** brings you to the SSL Certificates screen.

If you add a certificate to the LoadMaster in version 7.2.51 or later (or in 7.2.48.3 LTS or a later LTS version) and then downgrade to 7.2.50 or an earlier version (or 7.2.48.2 LTS or an earlier version) - the certificate will not work. To work around this, create a backup of all SSL certificates before downgrading and then restore the certificates after downgrading (**Certificates & Security > Backup/Restore Certs**). If you forget to take the backup before downgrading: upgrade the firmware again, take the certificate backup, downgrade, and then restore the certificate backup.

Reencryption Client Certificate

With SSL connections, the LoadMaster gets a certificate from the client and also gets a certificate from the server. The LoadMaster transcribes the client certificate in a header and sends the data to the server. The server still expects a certificate. This is why it is preferable to install a pre-authenticated certificate in the LoadMaster.

Reencryption SNI Hostname

Specify the Server Name Indication (SNI) hostname to use when connecting to the Real Servers.

This field is only visible when SSL re-encryption is enabled.

Cipher Set

A cipher is an algorithm for performing encryption or decryption.

Each Virtual Service (which has **SSL Acceleration** enabled) has a cipher set assigned to it. This can either be the system-defined cipher set or a user-customized cipher set. You can select a system-defined cipher set to quickly and easily select and apply the relevant ciphers.

In the FIPS LoadMaster, there are three system-defined cipher sets; **WUI**, **Default** and **BestPractices**. Each of these cipher sets only contain ciphers that are supported by FIPS.

Refer to the **SSL Accelerated Services for the FIPS, Feature Description** on the [Kemp Documentation Page](#) for a full list of the ciphers supported by the FIPS LoadMaster.

You can edit the list of ciphers which are assigned to a Virtual Service by clicking **Modify Cipher Set**. If changes are made to a preconfigured cipher set, a new custom cipher set is created. You can create custom cipher sets and use them across different Virtual Services.

By default, the name for the custom cipher set is **Custom_<VirtualServiceID>**. Kemp recommends changing the name of custom cipher sets because if another system-defined cipher set is modified, the name again defaults to **Custom_<VirtualServiceID>** and overwrites any existing cipher sets with that name.

It is not possible to modify the list of ciphers in a system-defined cipher set. Instead, a new custom cipher is created when changes are made to the ciphers list.

Ciphers

The **Ciphers** list is read only and displays a list of the currently assigned ciphers. Clicking **Modify Cipher Set** brings you to the **Cipher Set Management** screen. This screen allows you to create new, and modify existing custom cipher sets.

Client Certificates

- **No Client Certificates required:** enables the LoadMaster to accept HTTPS requests from any client. This is the recommended option.

By default the LoadMaster accepts HTTPS requests from any client. Selecting any of the other values below requires all clients to present a valid client certificate. In addition, the LoadMaster also passes information about the certificate to the application.

You should not change this option from the default of **No Client Certificates required**. Only change from the default option if you are sure that all clients that access this service have valid client certificates.

- **Client Certificates required:** requires that all clients forwarding a HTTPS request must present a valid client certificate.
- **Client Certificates and add Headers:** requires that all clients forwarding a HTTPS request must present a valid client certificate. The LoadMaster also passes information about the certificate to the application by adding headers.
- The below options send the certificate in its original raw form. The different options let you specify the format that you want to send the certificate in:
 - Client Certificates and pass DER through as SSL-CLIENT-CERT
 - Client Certificates and pass DER through as X-CLIENT-CERT
 - Client Certificates and pass PEM through as SSL-CLIENT-CERT
 - Client Certificates and pass PEM through as X-CLIENT-CERT

Verify Client using OCSP

Verify (using Online Certificate Status Protocol (OCSP)) that the client certificate is valid.

This option is only visible when ESP is enabled.

Strict Transport Security Header

Enable this option to add the Strict-Transport-Security header to all LoadMaster-generated messages (ESP and error messages). The options in this drop-down list are as follows:

- **Don't add the Strict Transport Security Header**
- **Add the Strict Transport Security Header - no subdomains**
- **Add the Strict Transport Security Header - include subdomains**

Intermediate Certificates

Prior to the **Intermediate Certificates** field being added to the **SSL Properties** section, there was no ability to assign intermediate or root certificates to a Virtual Service. The Certificate Authority (CA) for client certificates was kept in the global certificate store, so the following could occur:

3 WUI Options

- Client certificates from two different CAs are installed on the LoadMaster
- Client A presents a certificate issued from CA 1 and as a network administrator, you only want them to be able to access Virtual Service 1.
- Client B presents a certificate issued from CA 2 and as a network administrator, you only want them to be able to access Virtual Service 2.
- Because both client certificates are validated against the global LoadMaster trust store, client A is also allowed access to Virtual Service 2 and client B is also allowed access to Virtual Service 1.

The **Intermediate Certificates** field allows you to assign intermediate and root certificates to specific Virtual Services. This provides the ability to restrict access. It also enables control on what client certificates are eligible to be used when connecting to a service which is useful in environments with multiple client certificates signed by multiple authorities. For example, when this is configured correctly for the scenario above - Client A will only have access to Virtual Service 1 and Client B will only have access to Virtual Service 2.

To configure this, follow the steps below:

1. Upload the relevant certificates.
2. Then in the LoadMaster User Interface (UI), go to **Virtual Services > View/Modify Services**.
3. Click **Modify** on the relevant Virtual Service.
4. Expand the **SSL Properties** section.
5. Click **Show Intermediate Certificates**.
6. Select the relevant certificates from the boxes and click the arrows to remove/assign them from/to the Virtual Service.
7. Then, click **Set Intermediate Certificates**.

It is not possible to unassign all certificates from the Virtual Service. If you do not want client certificates to be required - select **No Client Certificates required** in the **Client Certificates** drop-down list.

3.2 Certificates & Security

The sections below describe the various screens in the **Certificates & Security** section of the LoadMaster WUI.

3.2.1 SSL Certificates



Shown above is the **Manage Certificates** screen. The options on this screen are described below.

Private Key Identifier - to generate a new private key which will be stored on the LoadMaster, enter a name for the private key and click **Generate CSR**.

Add Intermediate – adds an intermediate certificate.

Private Key – is the private key identifier given to the certificate at the time it was created.

Common Name(s) – is the FQDN (Fully Qualified Domain Name) for the site.

Assignment – the **Available VSs** box lists all of the SSL Virtual Services which are configured on the LoadMaster. The **Assigned VSs** box lists the Virtual Services which the certificate has been assigned to. The Virtual Services can be assigned/unassigned by selecting them and clicking the right/left arrow buttons and clicking **Save Changes**.

Operations –

- **Import Certificate** – imports the signed certificate.

When using FIPS in HA mode, ensure to only import certificates when both nodes are up.


- **Delete Key** - deletes the relevant private key and/or certificate
- **Show Reencrypt Certs** - display the re-encrypt certificates

Administrative Certificates

This section contains two drop-down lists:

- **Administrative Certificate** - select the certificate to be used for the administrative interface. Click Use Certificate to apply the changes.
- **Local Machine Certificate** - select the certificate to be used on the local machine interface. Click Use Certificate to apply the changes.

3.2.2 Intermediate Certificates

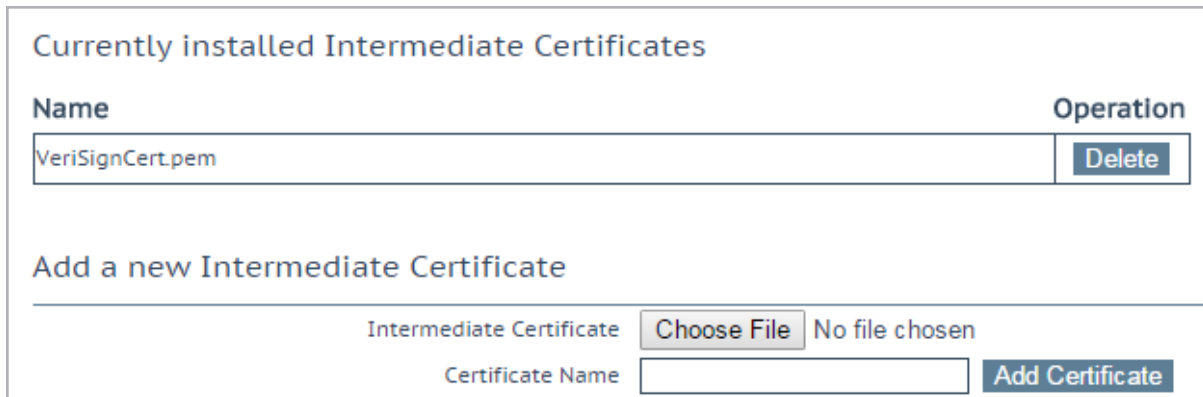


Name	Operation
VeriSignCert.pem	<button>Delete</button>

Add a new Intermediate Certificate

Intermediate Certificate No file chosen

Certificate Name

This screen shows a list of the installed intermediate certificates and the name assigned to them.



Add a new Intermediate Certificate

Intermediate Certificate No file chosen

Certificate Name

If you already have a certificate, or you have received one from a CSR, you can install the certificate by clicking the **Choose File** button. Navigate to and select the certificate and then enter the desired **Certificate Name**. The name can only contain alpha characters with a maximum of 32 characters.

Uploading several consecutive intermediate certificates within a single piece of text, as practiced by some certificate vendors such as GoDaddy, is allowed. The uploaded file is split into the individual certificates.

3.2.3 Generate CSR (Certificate Signing Request)

To create a CSR please complete the following steps:

1. In the main menu, go to **Certificates > SSL Certificates**.

The Manage Certificates screen will appear.

3 WUI Options



The screenshot shows the 'Certificate Configuration' WUI. It includes a 'Private Key Identifier' field with the value 'Example' and a 'Generate CSR' button. Below this is a table with columns: Private Key, Common Name(s), Virtual Services, Assignment, and Operation. The table contains one row with 'ExampleCert' as the Private Key, 'Example.com' as the Common Name(s), and '172.21.11.11:443' as the Virtual Services. The Assignment column shows 'None Assigned'. The Operation column has buttons for 'Import Certificate', 'Delete Key', and 'Show Reencrypt Certs'. There is also a 'Save Changes' button.

2. Enter a unique name in the **Private Key Identifier** field for the RSA 2048 key you intend to store on the HSM.

The Private Key Identifier is the password. Make a note of it because you will need it.

3. Click **Generate CSR**.



The screenshot shows the 'Generate CSR' WUI. It has a heading 'All Fields are optional except "Common Name"'. Below this are several input fields: '2 Letter Country Code (ex. US)', 'State/Province (Full Name - New York, not NY)', 'City', 'Company', 'Organization (e.g., Marketing,Finance,Sales)', 'Common Name (The FQDN of your web server)', 'Email Address', and 'SAN/UCC Names'. There is also a checkbox for 'Generate Elliptic Curve Request'. At the bottom are three buttons: 'Cancel', 'Reset', and 'Create CSR'.

4. Fill in the details in the resulting screen. The **Common Name** field is mandatory, all other fields are optional.

5. Click **Create CSR**.

The resulting key size will be 2048 bits.

3 WUI Options

The following is your 2048 bit *unsigned* certificate request. Copy the following, in its entirety, and send it to your trusted certificate authority

```

-----BEGIN CERTIFICATE REQUEST-----
MIIC9zCCAd8CAQAwgbEXCZA3BgNVBAYTA1VTMREwDwYDVQQIEwhOZXcgW9yazER
MA8GA1UEBxMlTmV3IFlvcmsxGjAYBgNVBAoTEUFTVAgVGVjaG5vbG9naWVzMREw
GwYDVQQLEXRlbm93bGVkZ2UgTWFuYXd1bWVudDEUMBIGA1UEAxMLRXhhbXBsZS5j
b20xKzApBgkqhkiG9w0BCQEWHGpibG9nZ3NAa2VtcHRlY2hub2xvZ211cy5jb20w
ggEiMA0GCSqGSIb3DQEBQUAA4IBDwAwggEKaoIBAQC+fCQ6Dx6VAHofGbqH0lEw
7j+DIpYXYt62I4NakrMzkFhkHEI6ond29p4s5Ntw0b2burBjUhw7HGV8kAkdmEx
VTZCSTvtF0k2m0w6hk6+koF1K8kFcJomYcz5ZU0LiCY2oGK8C34RBfes5DAYV7uv
Ks5SvWPhyC/10LZp/+g1sRtf7N30KvzIkIGdzSuFumCj1z+BvdSxf+gV2tqW8lNh
eMsuXbrhCyVhaohmz+Df03aubLOpFulyXpHopfOTCbC8mGn3y/xA0gKbdRAMjdZ
VMe6fzt6D1jKYr5W/PZa8UBr9RipVhR6TabluB9xsFVP5MrM5SvbHYDxAXWv9rw7
AgMBAAGGADANBgkqhkiG9w0BAQsFAAOCAQEApDqjy+nt6rjuxI10JXUC31qJwY
sikrVVSr4dU31gWI8CJIU+YASECvtzSpU0yZKumdHeDSJH3CmYI81vn79xzbt6b
3fDn0070NI+Tj07KWLFGsZTIIo6/yvU0gcIvLaiHHbrXG31TLRLYGZMwMtoFE8+3
S1a5Z8XzJFp8Jho5iWjE5z0eRXa6Ah3wya/O3nM0i6W71/m1zfesQFkTy19+I5g
T7bm9z+pUrIhmQQkcoeJ4Y2FaZz8flt8pRuLLldivV8tCsa/qdX8mCiAnikQMDrN
a4e348uEH9j28WHS140EPNfM3KoAg5iBI6IbKAF3WmUkrBekQNg4MPeA==
-----END CERTIFICATE REQUEST-----

```

[<-Back](#)

6. The CSR is displayed.

7. Copy the CSR into a file and send it to your Certificate Authority for signing. The Certificate Authority will provide you with the certificate which will be put on the server.

Unlike a non-FIPS certificate operation, the private key is never displayed or available during this process. It is stored inside the HSM, and is completely inaccessible to the user.

3.2.4 Backup/Restore Certs

Certificate Backup

Backup Intermediate Certificates

Passphrase

Retype Passphrase

Create Backup File

Restore Intermediate Certificates

Intermediate Certificate Backup File No file selected.

Passphrase

Restore Intermediate Certificates

Backup Intermediate Certificates: Create a backup of all intermediate certificates. The backup will be encrypted with the given passphrase.

Caution

When backing up certificates, a mandatory passphrase (password) needs to be entered twice. The parameters of the passphrase are that it must be alpha-numeric and it is case sensitive with a maximum of 64 characters. This passphrase is a mandatory requirement to restore a certificate. A certificate cannot be restored without the passphrase. If it is forgotten, there is no way to restore the certificate.

Intermediate Certificate Backup File: browse to and select the intermediate certificate backup file

Passphrase: enter the passphrase associated with the certificate backup file

3.2.5 Cipher Sets

Cipher Set Management

Cipher Set

Default

Available Ciphers

Filter:

Name	Strength
ECDHE-RSA-AES256-GCM-SHA384	High
ECDHE-ECDSA-AES256-GCM-SHA384	High
ECDHE-RSA-AES256-SHA384	High
ECDHE-ECDSA-AES256-SHA384	High
ECDHE-RSA-AES256-SHA	High
ECDHE-ECDSA-AES256-SHA	High
DH-DSS-AES256-GCM-SHA384	High
DHE-DSS-AES256-GCM-SHA384	High
DH-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-SHA256	High
DHE-DSS-AES256-SHA256	High
DH-RSA-AES256-SHA256	High
DH-DSS-AES256-SHA256	High

Assigned Ciphers

Filter:

Name	Strength
ECDHE-RSA-AES256-GCM-SHA384	High
ECDHE-ECDSA-AES256-GCM-SHA384	High
ECDHE-RSA-AES256-SHA384	High
ECDHE-ECDSA-AES256-SHA384	High
ECDHE-RSA-AES256-SHA	High
ECDHE-ECDSA-AES256-SHA	High
DH-DSS-AES256-GCM-SHA384	High
DHE-DSS-AES256-GCM-SHA384	High
DH-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-GCM-SHA384	High
DHE-RSA-AES256-SHA256	High
DHE-DSS-AES256-SHA256	High
DH-RSA-AES256-SHA256	High
DH-DSS-AES256-SHA256	High

Save as:

Default

Save

Cipher Set

Select the cipher set to view/modify.

The system-defined cipher sets are as follows:

- **Default:** The cipher set that is configured on the LoadMaster on a fresh installation. This cipher set is geared towards backwards compatibility with previous releases of the LoadMaster.

- **Default_NoRc4:** A more secure version of the default set that does not contain any RC4 ciphers, which are considered to be insecure on modern networks.
- **BestPractices:** This is the recommended cipher set to use on LoadMaster and it is updated occasionally to reflect current industry best practices. It does not include older and legacy cipher sets which may be required by older browser and application deployments. The last update to the BestPractices set was made in LMOS 7.2.52.0.
- **Intermediate_compatibility:** This cipher set includes some ciphers that are required by older browser and service implementations that are still seen in the field.
- **Backward_compatibility:** This cipher set provides maximum backward compatibility for clients back to Windows XP/IE6 at the risk of using less secure ciphers.

The **Backward_compatibility** cipher set should be used as a last resort only.

- **WUI:** This is the default cipher set used by the administrative user interface. It can be changed by using the controls under **Certificates & Security > Admin WUI Access**.
- **FIPS:** This set contains only ciphers that conform to Federal Information Processing Standards (FIPS) 140-2 level 1 standard and should be used only in those deployments that require it.
- **Legacy:** This cipher set is provided solely for upgrade compatibility for legacy LoadMaster firmware versions (v7.0-10 and previous). After upgrade to a modern version of LoadMaster, it is recommended to choose a more secure cipher set.
- **Null_Ciphers:** This cipher set contains what are called 'null ciphers', which do not provide any cryptographic protection, but rather depend on the application to provide it. In general, use these ciphers only if required by the application and if that application provides independent cryptographic protection.

To find out what ciphers are in each cipher set, go to **Certificates & Security > Cipher Sets**. Select the relevant **Cipher Set**.

Kemp reserves the right to change the contents of these cipher sets at any time in response to changes in industry security standards and best practices.

Two lists are displayed – **Available Ciphers** and **Assigned Ciphers**. These lists can be filtered by typing some text into the **Filter** text boxes provided. The **Filter** text boxes will only allow you to

enter valid text which is contained in the cipher names, for example **ECDHE**. If invalid text is entered, the text box will turn red and the invalid text is deleted.

Ciphers can be dragged and dropped to/from the **Available** and **Assigned** lists as needed. Ciphers which are already assigned will appear grayed out in the **Available Ciphers** list.

Changes cannot be made to a pre-configured cipher set. However, you can start with a preconfigured cipher set – make any changes as needed and then save the cipher set with a new custom name. Enter the new name in the **Save as** text box and click the **Save** button. Custom cipher sets can be used across different Virtual Services and can be assigned as the WUI cipher set.

It is not possible to delete pre-configured cipher sets. However, custom cipher sets can be deleted by selecting the relevant custom cipher set and clicking the **Delete Cipher set** button.

3.2.6 Remote Access

There are some SSL-related fields on the **Remote Access** screen. These are described below.

Administrator Access

Allow Remote SSH Access

☒ Using:

All Networks

Port: 22

Set Port

SSH Pre-Auth Banner

Set Pre-Auth Message

Allow Web Administrative Access

☒ Using:

eth0: 10.35.48.17

Port: 443

Admin Default Gateway

Set Administrative Access

Allow Multi Interface Access

☐

Enable API Interface

☒ Port:

via 443

Set Port

Self-Signed Certificate Handling

EC certs with a RSA signature

Outbound Connection Cipher Set

BestPractices

Admin Login Method

Password Only Access (default)

Only Password mode is available if no Pre-Auth Banner is specified

Enable Software FIPS 140-2 level 1 Mode

Enable Software FIPS mode

Enable Kemp Analytics

☒


Self-Signed Certificate Handling

Select the type of self-signed certificates that the system will use. The options are described below:

- **RSA self-signed certs:** By default, these are RSA certificates that are signed with the Kemp RSA root certificate
- **EC certs with a RSA signature:** The LoadMaster can generate an EC certificate also signed by the original RSA Kemp root certificate.
- **EC certs with an EC signature:** The LoadMaster can generate an EC certificate signed by the Kemp EC root certificate. In this mode, any CSRs generated will also be EC.

If **Self-Signed Certificate Handling** is set to **EC certs with an EC signature**, CSR generation is restricted to the administrative (**bal**) user only. If **Self-Signed Certificate Handling** is set to a different value, all users (regardless of their permissions) can generate CSRs.

You should not switch from **RSA self-signed certs** to **EC certs with an EC signature** directly. If you do this, connections will fail because there is no EC Kemp Certificate Authority (CA) certificate. To workaround this, you must first switch from **RSA self-signed certs** to **EC certs with a RSA signature**.

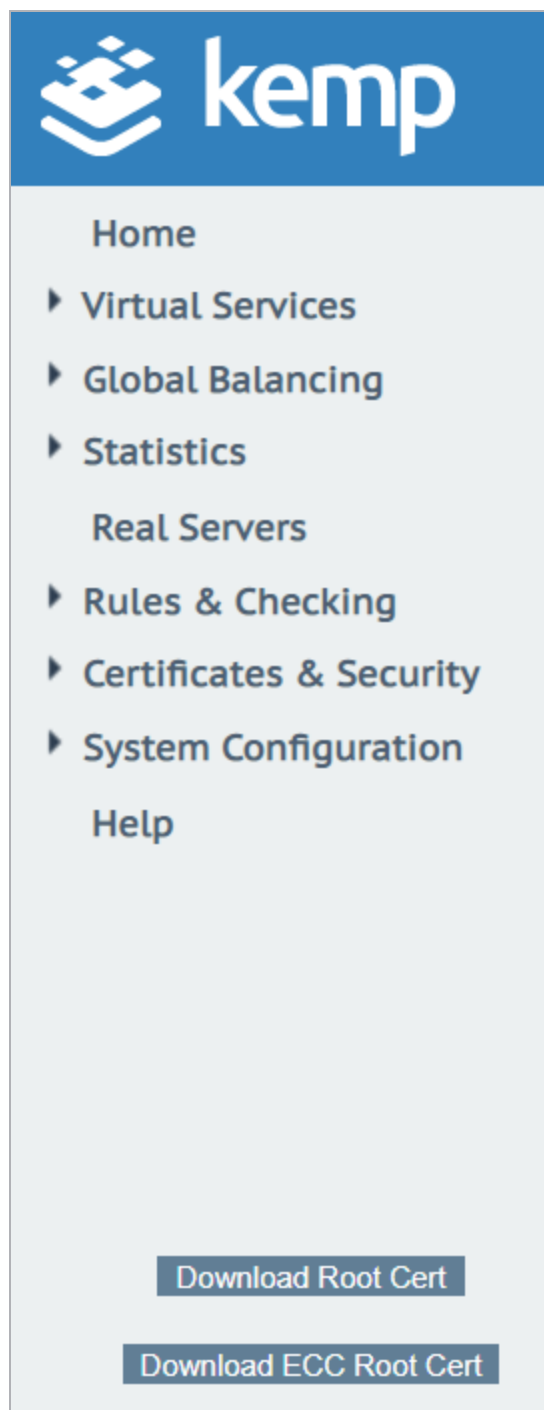

Then, download the new EC Kemp CA certificate by clicking **Download ECC Root Cert** in the bottom-right of the WUI under the main menu after refreshing the page. When this certificate has been downloaded, you can switch to **EC certs with an EC signature** with no loss of connection.

Outbound Connection Cipher Set

Select the cipher set to use on outbound connections (OCSP, email, LDAP, and so on). This is global for all outbound connections. For information on each of the cipher sets available, refer to the **Cipher Sets** section.

Re-encrypt connections are not affected by this.

3.2.7 OCSP Configuration

OCSP Server Settings

OCSP Server	<input type="text" value="10.11.0.35"/>	<input type="button" value="Set Address"/>
OCSP Server Port	<input type="text" value="443"/>	<input type="button" value="Set Port"/>
OCSP URL	<input type="text" value="/"/>	<input type="button" value="Set Path"/>
Use SSL	<input type="checkbox"/>	
Allow Access on Server Failure	<input type="checkbox"/>	

OCSP Server

The address of the OCSP server. This can either be in IP address or Fully Qualified Domain Name (FQDN) format.

OCSP Server Port

The port of the OCSP server.

OCSP URL

The URL to access on the OCSP server.

Use SSL

Select this to use SSL to connect to the OCSP server.

Allow Access on Server Failure

Treat an OCSP server connection failure or timeout as if the OCSP server had returned a valid response, that is, treat the client certificate as valid.

OCSP Checking

Enable OCSP Checking	<input type="checkbox"/>
----------------------	--------------------------

OCSP Checking

Select the **Enable OCSP Checking** check box to enable the LoadMaster to perform OCSP checks on certain outbound connections. This is disabled by default.

OCSP Stapling

Enable OCSP Stapling ☐

OCSP Refresh Interval

1 Hour ▼

Enable OCSP Stapling

Select this check box to enable the LoadMaster to respond to OCSP stapling requests. If a client connects using SSL and asks for an OCSP response, this is returned. Only Virtual Service certificates are validated. The system holds a cache of OCSP responses that are sent back to the client. This cache is maintained by the OCSP daemon. When the OCSP daemon sends a request to the server, it uses the name specified in the certificate (in the **Authority Information Access** field). If it cannot resolve this name, then it uses the default OCSP server specified in the **OCSP Server** text box.

OCSP Refresh Interval

Specify how often the LoadMaster should refresh the OCSP stapling information. The OCSP daemon caches the entry for up to the amount of time specified here, after which it is refreshed. Valid values range from 1 hour (default) to 24 hours.

References

Unless otherwise specified, the following documents can be found at:

<http://kemptechnologies.com/documentation>.

Web User Interface (WUI), Configuration Guide

Kemp LoadMaster, Product Overview

DoD Common Access Card (CAC) Authentication, Feature Description

RESTful API, Interface Description

SSL Accelerated Services for the FIPS, Feature Description

Last Updated Date

This document was last updated on 28 July 2023.