



Network Telemetry

Feature Description

UPDATED: 30 July 2023

© 2022 Progress Software Corporation and/or one of its subsidiaries or affiliates. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation. The information in these materials is subject to change without notice, and Progress Software Corporation assumes no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

#1 Load Balancer in Price/Performance, 360 Central, 360 Vision, Chef, Chef (and design), Chef Habitat, Chef Infra, Code Can (and design), Compliance at Velocity, Corticon, Corticon.js, DataDirect (and design), DataDirect Cloud, DataDirect Connect, DataDirect Connect64, DataDirect XML Converters, DataDirect XQuery, DataRPM, Defrag This, Deliver More Than Expected, DevReach (and design), Driving Network Visibility, Flowmon, Inspec, Ipswitch, iMacros, K (stylized), Kemp, Kemp (and design), Kendo UI, Kinvey, LoadMaster, MessageWay, MOVEit, NativeChat, OpenEdge, Powered by Chef, Powered by Progress, Progress, Progress Software Developers Network, SequeLink, Sitefinity (and Design), Sitefinity, Sitefinity (and design), Sitefinity Insight, SpeedScript, Stylized Design (Arrow/3D Box logo), Stylized Design (C Chef logo), Stylized Design of Samurai, TeamPulse, Telerik, Telerik (and design), Test Studio, WebSpeed, WhatsConfigured, WhatsConnected, WhatsUp, and WS_FTP are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries.

Analytics360, AppServer, BusinessEdge, Chef Automate, Chef Compliance, Chef Desktop, Chef Workstation, Corticon Rules, Data Access, DataDirect Autonomous REST Connector, DataDirect Spy, DevCraft, Fiddler, Fiddler Classic, Fiddler Everywhere, Fiddler Jam, FiddlerCap, FiddlerCore, FiddlerScript, Hybrid Data Pipeline, iMail, InstaRelinker, JustAssembly, JustDecompile, JustMock, KendoReact, OpenAccess, PASOE, Pro2, ProDataSet, Progress Results, Progress Software, ProVision, PSE Pro, Push Jobs, SafeSpaceVR, Sitefinity Cloud, Sitefinity CMS, Sitefinity Digital Experience Cloud, Sitefinity Feather, Sitefinity Thunder, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Supermarket, SupportLink, Unite UX, and WebClient are trademarks or service marks of Progress Software Corporation and/or its subsidiaries or affiliates in the U.S. and other countries. Java is a registered trademark of Oracle and/or its affiliates. Any other marks contained herein may be trademarks of their respective owners.

Please refer to the NOTICE.txt or Release Notes – Third-Party Acknowledgements file applicable to a particular Progress product/hosted service offering release for any related required third-party acknowledgements.

Table of Contents

1 Introduction	4
1.1 Document Purpose	6
1.2 Intended Audience	6
2 Network Telemetry Information	7
3 Download the Kemp Flowmon Collector	9
4 Enable and Configure Network Telemetry	10
5 Troubleshooting	12
Last Updated Date	13


1 Introduction

As of firmware version 7.2.53 (and Long Term Support (LTS) version 7.2.48.4), the LoadMaster can monitor the network traffic traversing its interfaces and generate rich network telemetry in IP Flow Information Export (IPFIX) format.

IPFIX is a flow export standard used to identify and collect application and transaction data in a network infrastructure. Flow data provides visibility into application traffic utilization and structure at any time, enabling you to report on key network performance metrics related to application workload. This is often leveraged as an alternative to full packet capture and analysis for ongoing monitoring of a network infrastructure. Various network devices including switches, firewalls, load balancers, and routers typically provide flow-based feeds to collectors which are then analyzed by a performance monitoring and analytics toolset.

For further details on IPFIX, refer to the following Flowmon page: [NetFlow/IPFIX Monitoring](#).

1 Introduction

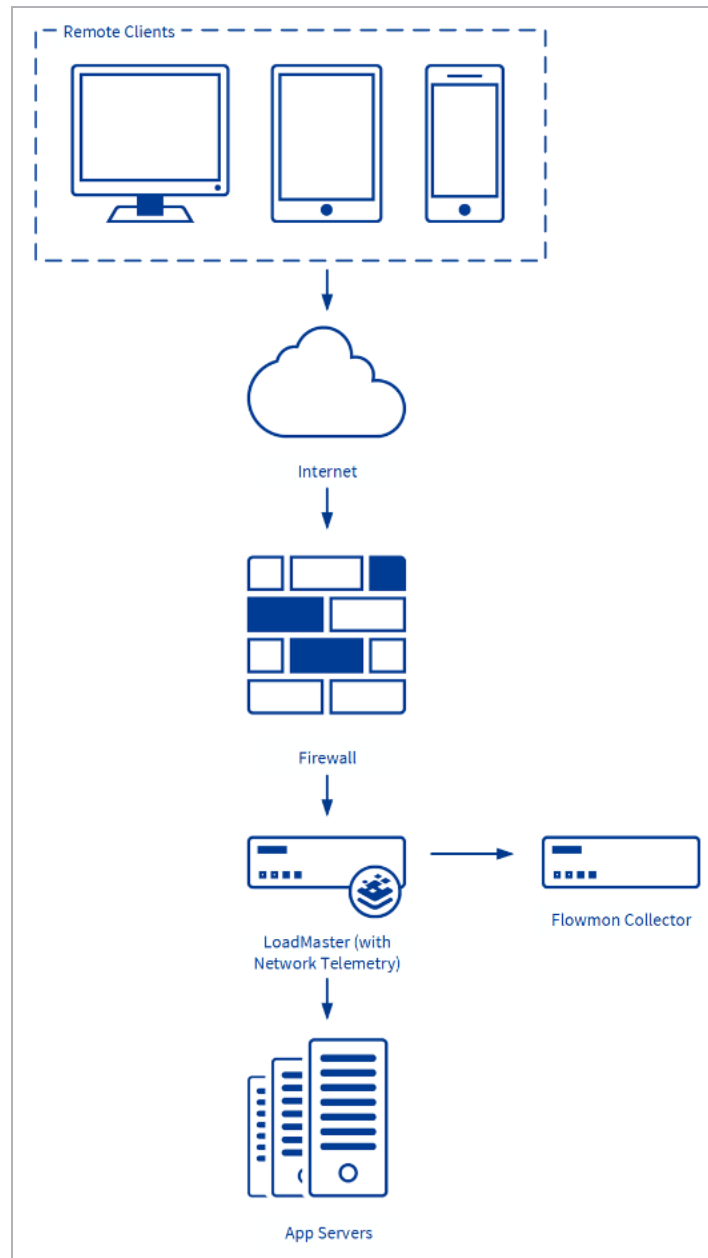

The LoadMaster is able to participate in providing flow data visibility in conjunction with a compatible IPFIX data analysis system. Kemp recommends using the [Flowmon Collector](#) for this data analysis.

The network telemetry feature is available on all LoadMaster products with any license or subscription type. The purpose of network telemetry is to understand traffic volume and structure at any time, report on key network performance metrics related to application workload and

1 Introduction

troubleshoot on operation and performance issues with the ability to drill down to individual session level.

1.1 Document Purpose

The purpose of this document is to describe how to enable this functionality on the LoadMaster and to gain access to the Kemp Flowmon Collector.

1.2 Intended Audience

Anyone who would like to export application flow data from the LoadMaster.

2 Network Telemetry Information

Exported network telemetry provides information across all network layers including performance metrics and rich application layer telemetry.

Layer	Information
Link layer (L2)	- ARP
	- MAC addresses
	- VLAN tag
	- Interface index
Network and transport layer (L3/L4)	- IP addresses, ports, protocols
	- Volumetric statistics (bytes, packets, flows)
	- Timestamp and signaling (TCP flags)
	- Network performance metrics (Round Trip Time (RTT), Server Response Time (SRT), TCP retransmissions, jitter)
	- Extended TCP telemetry (Time To Live (TTL), SYN packet size, default TCP window size)
Application layer (L7)	- VXLAN ID
	- DHCP
	- DNS
	- HTTP
	- Email
	- Application ID (Network Based Application Recognition (NBAR2))
For further details on NBAR2, refer to the following RFC: Cisco Systems Export of	

Layer	Information
	Application Information in IP Flow Information Export (IPFIX).
	<ul style="list-style-type: none"> - Samba - Extended VoIP - PostgreSQL - MySQL

The network traffic is monitored on the interface level. When SSL offloading with re-encryption is used, network telemetry does not contain any application layer telemetry related to the HTTP protocol. However, TLS/SSL information such as Server Name Indication (SNI), TLS version, or certificate information is available (depending on the TLS version in use).

The reduction ratio of original traffic volume to network telemetry volume is 250:1 which means that monitoring of 1Gbps of traffic generates approximately 4Mbps of traffic statistics. The real value may vary according to traffic structure and mixture of application protocols.

For further details on IPFIX, refer to the following RFC: [Information Model for IP Flow Information Export](#)

3 Download the Kemp Flowmon Collector

Network telemetry requires an external collector to collect the IPFIX application flow data. The Kemp Flowmon Collector is the ideal network monitoring appliance that captures, stores, and processes flow data, including normalization, visualization, and analysis.

To download the Kemp Flowmon Collector, follow these steps:

1. In the main menu of the LoadMaster UI, click **Network Telemetry**.
2. Click **Download Flowmon Collector**.

You will be taken to the Kemp Flowmon Collector download page to continue the process.

3. Enter your **Kemp ID** and **Password**.

If you do not have a Kemp ID, you can create one here: [Create a Kemp ID](#).

4. Click **Sign In**.

Only one Flowmon trial download is available per Kemp ID.

5. Select your hypervisor from the first drop-down list.
6. Select your country from the second drop-down list.
7. Select the check box to agree to the End User License Agreement (EULA).
8. Click **Download now**.

After downloading the file, you must then deploy and run the machine on your chosen hypervisor. For instructions on how to do this, refer to the documentation provided as part of the Flowmon Collector downloadable zip package.

4 Enable and Configure Network Telemetry

Network telemetry is generated per a network interface and is available disabled by default on all new LoadMaster deployments for firmware version 7.2.53 and above. To enable network telemetry navigate to the “**Network Telemetry**” menu item

On Long Term Support (LTS) LoadMaster versions, or older versions of the LoadMaster that have been patched to a newer version, you may need to enable the network telemetry feature. To enable the network telemetry feature, click **Network Telemetry** in the main menu of the LoadMaster User Interface (UI) and click **Install**.

After you successfully install network telemetry on the LoadMaster, you should see a number of fields to configure on the **Network Telemetry** screen.

Enabling Network Telemetry may impact performance throughput

Details on each of these options are below:

- **IP address of Collector:** Define the destination IP address or Fully Qualified Domain Name (FQDN) and port number of your IPFIX collector (for example, **1.1.1.1:2055** or **collector.local:3000**). The IPFIX export runs over the UDP protocol and you must ensure that the collector is reachable over the network from the LoadMaster. Once you configure the collector IP address or FQDN you can validate the network connectivity by clicking **Validate** and clicking **OK**. Validation is based on a plain ICMP ping message and it validates the IP or FQDN (not the port).

IPFIX is a plain text UDP packet stream. Kemp recommends that it should only be exported over a secure network.

- **Active Timeout:** Set the global active timeout value. The default value is **300**.

This setting ensures that very long flows will be exported in the specified time. The Timeout is checked for each incoming packet. If the corresponding flow is lasting longer than the specified timeout interval, it is deleted from the flow cache and exported to the collector.

- **Inactive Timeout:** Set the global inactive timeout value. The default value is **30**.

This setting avoids keeping old, inactive flow records in the flow cache forever. When no packets belonging to the flow are observed for the specified timeout interval, the flow record is exported to collector

- **Export Protocol:** The export protocol (**IPFIX** is currently the only selectable protocol).
- **Advanced settings:** Enable/disable the check boxes here depending on what values you would like to collect.

There are some check boxes in the **Advanced settings** section that are not possible to change at present. These will be configurable in a future release.

- **Activate export of Application Flow Data:** Select the relevant interface (or interfaces) to collect IPFIX data for.

The network interface screens (for example, **System Configuration > Network Setup > Interfaces > eth0**) indicate if network telemetry monitoring is enabled or disabled for that interface (depending on what interfaces are selected on the **Network Telemetry** screen)

To enable Network Telemetry on an interface, the interface must have an IP Address. Interfaces configured with Virtual LANs cannot have Network Telemetry enabled unless an IP Address is assigned.

When two LoadMasters are operating as a HA pair, the Network Telemetry traffic will present from the physical address of the LoadMaster and not the shared address. It is necessary to create a profile for both the LoadMasters in the HA pair on the Kemp Flowmon Collector.

5 Troubleshooting

If you have any issues with the network telemetry export you can use the built-in TCP dump tool as part of the debugging option on the LoadMaster to validate data is exported towards the collector. To perform a TCP dump using the LoadMaster, follow the steps below:

1. In the main menu, go to **System Configuration > Logging Options > System Log Files > Debug Options**.
2. In the **TCP dump** section, enter the Collector IP address in the **Address** text box.
3. Click **Start**.
4. Click **Stop** to stop the TCP dump.
5. Click **Download** to download the **.pcap** file.

Ensure that there is no specific network configuration such as a firewall or access control list that is preventing the data from reaching the export target.

You can also troubleshoot from the Collector side. Log into the Kemp Flowmon Collector using SSH and run **tcpdump** to check if flow data is reaching the Collector interface.

Last Updated Date

This document was last updated on 30 July 2023.